

# **BHUTAN CIVIL AVIATION REQUIREMENT**



## **BCAR-3**

### **Meteorological Service for International and Domestic Air Navigation**

**Third Edition, Oct 2024**

Issued under the authority of the Director  
Bhutan Civil Aviation Authority



	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Table of Contents		Page: ii

## TABLE OF CONTENTS

**RECORD OF AMENDMENTS .....i**

**TABLE OF CONTENTS ..... ii**

**FOREWORD .....1**

**CHAPTER 1. DEFINITIONS .....1**

    1.1 Definitions..... 1

    1.2 Terms used with a limited meaning .....7

**CHAPTER 2. GENERAL PROVISIONS .....1**

    2.1 Objective, determination and provision of meteorological service..... 1

    2.2. Supply, use, quality management and interpretation of meteorological information ..... 1

    2.3 Notifications required from operators .....3

**CHAPTER 3. GLOBAL SYSTEMS, SUPPORTING CENTRES AND METEOROLOGICAL OFFICES .....1**

    3.1 (Reserved for WAFS) ..... 1

    3.2 (Reserved for WAFC)..... 1

    3.3 Aerodrome meteorological offices..... 1

    3.4 Meteorological watch offices .....2

    3.5 Volcanic ash advisory centres ..... 3

    (Not applicable)..... 3

    3.6 State volcano observatories..... 3

    3.7 Tropical cyclone advisory centres.....3

    3.8 Space weather centres (SWXC)..... 3

**CHAPTER 4. METEOROLOGICAL OBSERVATIONS AND REPORTS .....1**

    4.1 Aeronautical meteorological stations and observations ..... 1

    4.2 Agreement between air traffic services authorities and meteorological authorities..... 2

    4.3 Routine observations and reports ..... 2

    4.4 Special observations and reports ..... 3

    4.5 Contents of reports ..... 3

    4.6 Observing and reporting meteorological elements..... 4

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Table of Contents		Page: iii

4.7	Reporting meteorological information from automatic observing systems .....	6
4.8	Observations and reports of volcanic activity .....	6

**CHAPTER 5. AIRCRAFT OBSERVATIONS AND REPORTS.....1**

5.1	Obligations of the state .....	1
5.2	Types of aircraft observations .....	1
5.3	Routine aircraft observations-designation.....	1
5.4	Routine aircraft observations-exemption .....	1
5.5	Special aircraft observations .....	1
5.6	Other non-routine aircraft observations .....	2
5.7	Reporting of aircraft observations during flight.....	2
5.8	Relay of air-reports by ATS units .....	2
5.9	Recording and post flight reporting of aircraft observations of volcanic activity.....	2

**CHAPTER 6. FORECASTS.....1**

6.1	Use of forecasts .....	1
6.2	Aerodrome forecasts .....	1
6.3	Landing forecasts .....	2
6.4	Forecasts for take-off .....	2
6.5	Area forecasts for low-level flights.....	2

**CHAPTER 7. SIGMET AND AIRMET INFORMATION, AERODROME WARNINGS AND WIND SHEAR WARNINGS AND ALERTS.....1**

7.1	SIGMET information .....	1
7.2	AIRMET information .....	1
7.3	Aerodrome warnings.....	1
7.4	Wind shear warnings and alerts .....	2

**CHAPTER 8. AERONAUTICAL CLIMATOLOGICAL INFORMATION.....1**

8.1	General provisions .....	1
8.2	Aerodrome climatological tables .....	1
8.3	Aerodrome climatological summaries .....	1
8.4	Copies of meteorological observational data .....	1

**CHAPTER 9. SERVICE FOR OPERATORS AND FLIGHT CREW MEMBERS.....1**

9.1	General provisions .....	1
-----	--------------------------	---

	<b>Meteorological Service</b>	BCAR - 3	
	Table of Contents		Page: iv

9.2 Briefing, consultation and display.....	3
9.3 Flight documentation .....	3
9.4 Automated pre-flight information systems for briefing, consultation, flight planning and flight documentation .....	4
9.5 Information for aircraft in flight.....	4

**CHAPTER 10. INFORMATION FOR AIR TRAFFIC SERVICES, SEARCH AND RESCUE SERVICES AND AERONAUTICAL INFORMATION SERVICES .....1**

10.1 Information for air traffic services units .....	1
10.2 Information for search and rescue services units .....	1
10.3 Information for aeronautical information services units .....	1

**CHAPTER 11. REQUIREMENTS FOR AND USE OF COMMUNICATIONS.....1**

11.1 Requirements for communications .....	1
11.2 Use of aeronautical fixed service communications and the public Internet— meteorological bulletins.....	2
11.3 Use of aeronautical fixed service communications-world area forecast system products ....	2
11.4 Use of aeronautical mobile service communication .....	2
11.5 Use of aeronautical data link service-contents of D-VOLMET.....	2
11.6 Use of aeronautical broadcasting service-contents of VOLMET broadcasts.....	3

**APPENDIX 1. FLIGHT DOCUMENTATION – MODEL CHARTS AND FORMS.....1**

OPMET INFORMATION	MODEL A .....	2
UPPER WIND AND TEMPERATURE CHART FOR STANDARD ISOBARIC SURFACE MODEL IS.....		3
UPPER WIND AND TEMPERATURE CHART FOR STANDARD ISOBARIC SURFACE MODEL IS.....		4
SIGNIFICANT WEATHER CHART (HIGH LEVEL) MODEL SWH .....		5
Example — Polar stereographic projection (showing the jet stream vertical extend) .....		5
SIGNIFICANT WEATHER CHART (MEDIUM LEVEL) MODEL SWM.....		6
SIGNIFICANT WEATHER CHART (LOW LEVEL) MODEL SWL.....		7
Example 1 .....		7
SIGNIFICANT WEATHER CHART (LOW LEVEL) MODEL SWL.....		8

	<b>Meteorological Service</b>	BCAR - 3	
	Table of Contents		Page: v

Example 2 .....	8
TROPICAL CYCLONE ADVISORY INFORMATION IN GRAPHICAL FORMAT MODEL TCG .....	9
VOLCANIC ASH ADVISORY INFORMATION IN GRAPHICAL FORMAT MODEL VAG.....	10
SIGMET FOR TROPICAL CYCLONE IN GRAPHICAL FORMAT MODEL STC .....	11
SIGMET FOR VOLCANIC ASH IN GRAPHICAL FORMAT MODEL SVA .....	11
SIGMET FOR PHENOMENA OTHER THAN TROPICAL CYCLONE AND MODEL SGE.....	12
VOLCANIC ASH IN GRAPHICAL FORMAT .....	12
SHEET OF NOTATIONS USED IN FLIGHT DOCUMENTATION MODEL SN .....	14

**APPENDIX 2. TECHNICAL SPECIFICATIONS RELATED TO GLOBAL SYSTEMS,  
SUPPORTING CENTRES AND METEOROLOGICAL OFFICES.....1**

1. WORLD AREA FORECAST SYSTEM .....	1
2. AERODROME METEOROLOGICAL OFFICES.....	1
3. Volcanic ash advisory centre .....	1
4. State volcano observatories.....	2
5. Tropical cyclone advisory centres.....	2
6. Space weather centres .....	2

**APPENDIX 3. TECHNICAL SPECIFICATIONS RELATED TO METEOROLOGICAL  
OBSERVATIONS AND REPORTS .....1**

1. GENERAL PROVISION RELATED TO METEOROLOGICAL OBSERVATIONS .....	1
2. GENERAL CRITERIA RELATED TO METEOROLOGICAL REPORTS .....	1
3. DISSEMINATION OF METEOROLOGICAL REPORTS .....	4
4. OBSERVING AND REPORTING OF METEOROLOGICAL ELEMENTS .....	5
Table A3-1. Template for the local routine (MET REPORT) and local special (SPECIAL) reports .....	20
Table A3-2: Template for METAR and SPECI.....	24
Table A3-3. Use of change indicators in trend forecasts.....	27
Table A3-4. Ranges and resolutions for the numerical elements included in local reports. ....	27
Table A 3-5. Ranges and resolutions for the numerical elements included in METAR and SPECI.....	28
Example A3-1. Routine report .....	29

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Table of Contents		Page: vi

Example A3-2. Special report.....	30
Example A3-3. Volcanic activity report .....	30

**APPENDIX 4. TECHNICAL SPECIFICATIONS RELATED TO AIRCRAFT**

**OBSERVATIONS AND REPORTS .....1**

1. CONTENTS OF AIR-REPORTS .....	1
2. CRITERIA FOR REPORTING .....	3
3. EXCHANGE OF AIR-REPORTS.....	4
4. SPECIFIC PROVISIONS RELATED TO REPORTING WIND SHEAR AND VOLCANIC ASH.....	5
Table A4-1. Template for the special air-report (downlink) .....	6
Table A4-2. Time of occurrence of the peak value to be reported .....	6
Table A4-3. Ranges and resolutions for the meteorological elements included in air-reports....	7

**APPENDIX 5. TECHNICAL SPECIFICATIONS RELATED TO FORECASTS.....1**

1. CRITERIA RELATED TO TAF .....	1
2. CRITERIA RELATED TO TREND FORECASTS.....	5
3. CRITERIA RELATED TO FORECASTS FOR TAKE-OFF .....	8
4. CRITERIA RELATED TO AREA FORECASTS FOR LOW-LEVEL FLIGHTS .....	8
Table A5-1. Template for TAF.....	9
Table A5-2. Use of change and time indicators in TAF .....	11
Table A5-3. Template for GAMET .....	12
Table A5-4. Ranges and resolutions for the numerical elements included in TAF .....	14
Example A5-1: TAF.....	15
Example A5-2. Cancellation of TAF .....	15
Example A5-3. GAMET area forecast.....	16

**APPENDIX 6. TECHNICAL SPECIFICATIONS RELATED TO SIGMET AND AIRMET INFORMATION, AERODROME WARNINGS AND WIND SHEAR WARNINGS AND ALERTS .....1**

1. SPECIFICATIONS RELATED TO SIGMET INFORMATION.....	1
2. SPECIFICATIONS RELATED TO AIRMET INFORMATION .....	2
3. SPECIFICATIONS RELATED TO SPECIAL AIR-REPORTS.....	4
4. DETAILED CRITERIA RELATED TO SIGMET AND AIRMET MESSAGES AND SPECIAL AIR REPORTS (UPLINK).....	5
5. SPECIFICATIONS RELATED TO AERODROME WARNINGS.....	6

	<b>Meteorological Service</b>	BCAR - 3	
	Table of Contents		Page: vii

6. SPECIFICATIONS RELATED TO WIND SHEAR WARNINGS .....	7
Table A6-1A. Template for SIGMET and AIRMET messages .....	8
Table A6-1B. Template for special air-reports (uplink) .....	16
Table A6-2. Template for aerodrome warnings .....	16
Table A6-3. Template for wind shear warnings.....	17
Example A6-5. SIGMET message for severe turbulence .....	19
Example A6-6. AIRMET message for moderate mountain wave.....	19

**APPENDIX 7. TECHNICAL SPECIFICATIONS RELATED TO AERONAUTICAL CLIMATOLOGICAL INFORMATION .....1**

1. PROCESSING OF AERONAUTICAL CLIMATOLOGICAL INFORMATION .....	1
2. EXCHANGE OF AERONAUTICAL CLIMATOLOGICAL INFORMATION.....	1
3. CONTENT OF AERONAUTICAL CLIMATOLOGICAL INFORMATION .....	1

**APPENDIX 8. TECHNICAL SPECIFICATIONS RELATED TO SERVICE FOR OPERATORS AND FLIGHT CREW MEMBERS .....1**

1. MEANS OF SUPPLY AND FORMAT OF METEOROLOGICAL INFORMATION.....	1
2. SPECIFICATIONS RELATED TO INFORMATION FOR PRE-FLIGHT PLANNING AND IN-FLIGHT RE-PLANNING .....	1
3. SPECIFICATIONS RELATED TO BRIEFING AND CONSULTATION.....	2
4. SPECIFICATIONS RELATED TO FLIGHT DOCUMENTATION .....	2
5. SPECIFICATIONS RELATED TO AUTOMATED PRE-FLIGHT INFORMATION SYSTEMS FOR BRIEFING, CONSULTATION, FLIGHT PLANNING AND FLIGHT DOCUMENTATION.....	5
6. SPECIFICATIONS RELATED TO INFORMATION FOR AIRCRAFT IN FLIGHT.....	5
Figure A8-1. Fixed areas of coverage of WAFS forecasts in chart form —Mercator projection..	6
Figure A8-2. Fixed areas of coverage of WAFS forecasts in chart form- Polar stereographic projection (northern hemisphere).....	7
Figure A8-3. Fixed areas of coverage of WAFS forecasts in chart form —Polar stereographic projection (southern hemisphere).....	8

**APPENDIX 9. TECHNICAL SPECIFICATIONS RELATED TO INFORMATION FOR AIR TRAFFIC SERVICES, SEARCH AND RESCUE SERVICES AND AERONAUTICAL INFORMATION SERVICES.....1**

1. INFORMATION TO BE PROVIDED FOR AIR TRAFFIC SERVICES UNITS.....	1
2. INFORMATION TO BE PROVIDED FOR SEARCH AND RESCUE SERVICES UNITS ....	3

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Table of Contents		Page: viii

3. INFORMATION TO BE PROVIDED FOR AERONAUTICAL INFORMATION SERVICES UNITS.....3

**APPENDIX 10. TECHNICAL SPECIFICATIONS RELATED TO REQUIREMENTS FOR AND USE OF COMMUNICATIONS .....1**

1. SPECIFIC REQUIREMENTS FOR COMMUNICATIONS ..... 1

2. USE OF AERONAUTICAL FIXED SERVICE COMMUNICATIONS AND THE PUBLIC INTERNET .....1

3. USE OF AERONAUTICAL MOBILE SERVICE COMMUNICATIONS .....2

4. USE OF AERONAUTICAL DATA LINK SERVICE — D-VOLMET.....3

5. USE OF AERONAUTICAL BROADCASTING SERVICE — VOLMET BROADCASTS ....3

**ATTACHMENT A. OPERATIONALLY DESIRABLE ACCURACY MEASUREMENT OR OBSERVATION.....1**

**ATTACHMENT B. OPERATIONALLY DESIRABLE ACCURACY OF FORECASTS.....1**

**ATTACHMENT C. SELECTED CRITERIA APPLICABLE TO AERODROME REPORTS 1**

---

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Foreword		Page: 1

## FOREWORD

Section 59 of the Civil Aviation Act of Bhutan 2016 empowers the Head of Authority of Bhutan Civil Aviation Authority (BCAA) to make Rules and Regulations concerning the use of the airspace, air navigation facilities and services. Accordingly, the third edition of BCAR-3 (Meteorological Service) containing provision incorporating the standard and recommended practices of ICAO Annex 3 has been developed.

The third edition of BCAR-3 or BCAR – Meteorological Service, which are to be used interchangeably and construed to refer to this document, is hereby published in accordance with Section 56 of the Act.

During the transposing of the standard and recommended practices of ICAO Annex 3 to this BCAR, some provisions that are not applicable or currently irrelevant have been left out and marked as “Reserved”. These provisions will be incorporated as and when appropriate.

Any difference existing in this BCAR and the related ICAO Standards and Recommended Practices and any amendments thereto will be notified to the ICAO and the same shall be published in the Aeronautical Information Publication (AIP).

The third edition of BCAR-3 hereby supersedes the BCAR – Meteorological Service that was published on December 7, 2017.

This BCAR is a controlled document and the provisions contained herein are subject to change through amendments.



Director

Date: 31/10/2024

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Definitions	Chapter: 1	Page: 1

## CHAPTER 1. DEFINITIONS

*Note.— The designation (RR) in these definitions indicates a definition which has been extracted from the Radio Regulations of the International Telecommunication Union (ITU) (see Handbook on Radio Frequency Spectrum Requirements for Civil Aviation including Statement of Approved ICAO Policies (ICAO Doc 9718)).*

### 1.1 Definitions

When the following terms are used in this document for Meteorological Service for International and Domestic Air Navigation, they have the following meanings:

***Aerodrome.*** A defined area on land or water (including any buildings, installations and equipment) intended to be used either wholly or in part for the arrival, departure and surface movement of aircraft.

***Aerodrome climatological summary.*** Concise summary of specified meteorological elements at an aerodrome, based on statistical data.

***Aerodrome climatological table.*** Table providing statistical data on the observed occurrence of one or more meteorological elements at an aerodrome.

***Aerodrome control tower.*** A unit established to provide air traffic control service to aerodrome traffic.

***Aerodrome elevation.*** The elevation of the highest point of the landing area.

***Aerodrome meteorological office.*** An office designated to provide meteorological service for aerodromes serving international air navigation.

***Aerodrome reference point.*** The designated geographical location of an aerodrome.

***Aeronautical fixed service (AFS).*** A telecommunication service between specified fixed points provided primarily for the safety of air navigation and for the regular, efficient and economical operation of air services.

***Aeronautical fixed telecommunication network (AFTN).*** A worldwide system of aeronautical fixed circuits provided, as part of the aeronautical fixed service, for the exchange of messages and/or digital data between aeronautical fixed stations having the same or compatible communications characteristics.

***Aeronautical meteorological station.*** A station designated to make observations and meteorological reports for use in international and domestic air navigation.

***Aeronautical mobile service (RR S1.32).*** A mobile service between aeronautical stations and aircraft stations, or between aircraft stations, in which survival craft stations may participate; emergency position-indicating radio beacon stations may also participate in this service on designated distress and emergency frequencies.

***Aeronautical telecommunication station.*** A station in the aeronautical telecommunication service.

***Aircraft.*** Any machine that can derive support in the atmosphere from the reactions of the air other than the reactions of the air against the earth's surface.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Definitions	Chapter: 1	Page: 2

**Aircraft observation.** The evaluation of one or more meteorological elements made from an aircraft in flight.

**AIRMET information.** Information issued by a meteorological watch office concerning the occurrence or expected occurrence of specified en-route weather phenomena which may affect the safety of low-level aircraft operations and which was not already included in the forecast issued for low-level flights in the flight information region concerned or sub-area thereof.

**Air-report.** A report from an aircraft in flight prepared in conformity with requirements for position, and operational and/or meteorological reporting.

**Air traffic services unit.** A generic term meaning variously, air traffic control unit, flight information centre or air traffic services reporting office.

**Alternate aerodrome.** An aerodrome to which an aircraft may proceed when it becomes either impossible or inadvisable to proceed to or to land at the aerodrome of intended landing where the necessary services and facilities are available, where aircraft performance requirements can be met and which is operational at the expected time of use. Alternate aerodromes include the following:

**Take-off alternate.** An alternate aerodrome at which an aircraft would be able to land should this become necessary shortly after take-off and it is not possible to use the aerodrome of departure.

**En-route alternate.** An alternate aerodrome at which an aircraft would be able to land in the event that a diversion becomes necessary while en route.

**Destination alternate.** An alternate aerodrome at which an aircraft would be able to land should it become either impossible or inadvisable to land at the aerodrome of intended landing.

*Note- The aerodrome from which a flight departs may also be an en-route or a destination alternate aerodrome for that flight.*

**Altitude.** The vertical distance of a level, a point or an object considered as a point, measured from mean sea level (MSL).

**Approach control unit.** A unit established to provide air traffic control service to controlled flights arriving at, or departing from, one or more aerodromes.

**Appropriate ATS authority.** The relevant authority designated by the State responsible for providing air traffic services in the airspace concerned.

**Area control centre.** A unit established to provide air traffic control service to controlled flights in control areas under its jurisdiction.

**Area navigation (RNAV).** A method of navigation which permits aircraft operations on any desired flight path within the coverage of ground- or space-based navigation aids or within the limits of the capability of self-contained aids, or a combination of these.

*Note -Area navigation includes performance-based navigation as well as other operations that do not meet the definition of performance-based navigation.*

**Automatic dependent surveillance (ADS).** A surveillance technique in which aircraft automatically provide, via a data link, data derived from on-board navigation and position-fixing systems, including aircraft identification, four-dimensional position and additional data as appropriate.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Definitions	Chapter: 1	Page: 3

**Automatic dependent surveillance — contract (ADS-C).** A means by which the terms of an ADS-C agreement will be exchanged between the ground system and the aircraft, via a data link, specifying under what conditions ADS-C reports would be initiated, and what data would be contained in the reports.

*Note.— The abbreviated term “ADS contract” is commonly used to refer to ADS event contract, ADS demand contract, ADS periodic contract or an emergency mode*

**Briefing.** Oral commentary on existing and/or expected meteorological conditions.

**Cloud of operational significance.** A cloud with the height of cloud base below 1 500 m (5 000 ft) or below the highest minimum sector altitude, whichever is greater, or a cumulonimbus cloud or a towering cumulus cloud at any height.

**Consultation.** Discussion with a meteorologist or another qualified person of existing and/or expected meteorological conditions relating to flight operations; a discussion includes answers to questions.

**Control area.** A controlled airspace extending upwards from a specified limit above the earth.

**Cruising level.** A level maintained during a significant portion of a flight.

**Elevation.** The vertical distance of a point or a level, on or affixed to the surface of the earth, measured from mean sea level.

**Extended range operation.** Any flight by an aeroplane with two turbine engines where the flight time at the one engine inoperative cruise speed (in ISA and still air conditions), from a point on the route to an adequate alternate aerodrome, is greater than the threshold time approved by the State of the Operator.

**Flight crew member.** A licensed crew member charged with duties essential to the operation of an aircraft during a flight duty period.

**Flight documentation.** Written or printed documents, including charts or forms, containing meteorological information for a flight.

**Flight information centre.** A unit established to provide flight information service and alerting service.

**Flight information region.** An airspace of defined dimensions within which flight information service and alerting service are provided.

**Flight level.** A surface of constant atmospheric pressure which is related to a specific pressure datum, 1 013.2 hectopascals (hPa), and is separated from other such surfaces by specific pressure intervals.

*Note 1.— A pressure type altimeter calibrated in accordance with the Standard Atmosphere:*

- a) *when set to a QNH altimeter setting, will indicate altitude;*
- b) *when set to a QFE altimeter setting, will indicate height above the QFE reference datum;*
- c) *when set to a pressure of 1 013.2 hPa, may be used to indicate flight levels.*

*Note 2.— The terms “height” and “altitude”, used in Note 1, indicate altimetric rather than geometric heights and altitudes.*

**Forecast.** A statement of expected meteorological conditions for a specified time or period, and for a specified area or portion of airspace.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Definitions	Chapter: 1	Page: 4

***GAMET area forecast.*** An area forecast in abbreviated plain language for low-level flights for a flight information region or sub-area thereof, prepared by the meteorological office designated by the meteorological authority concerned and exchanged with meteorological offices in adjacent flight information regions, as agreed between the meteorological authorities concerned.

***Grid point data in digital form.*** Computer processed meteorological data for a set of regularly spaced points on a chart, for transmission from a meteorological computer to another computer in a code form suitable for automated use.

***Height.*** The vertical distance of a level, a point or an object considered as a point, measured from a specified datum.

***Human Factors principles.*** Principles which apply to aeronautical design, certification, training, operations and maintenance and which seek safe interface between the human and other system components by proper consideration to human performance.

***ICAO meteorological information exchange model (IWXXM).*** A data model for representing aeronautical meteorological information.

***Level.*** A generic term relating to the vertical position of an aircraft in flight and meaning variously height, altitude or flight level.

***Designated meteorological service provider.*** The entity providing or arranging for the provision of meteorological service for international and domestic air navigation.

***Meteorological bulletin.*** A text comprising meteorological information preceded by an appropriate heading.

***Meteorological information.*** Meteorological report, analysis, forecast, and any other statement relating to existing or expected meteorological conditions.

***Meteorological office.*** An office designated to provide meteorological service for international air navigation.

***Meteorological report.*** A statement of observed meteorological conditions related to a specified time and location.

***Meteorological satellite.*** An artificial Earth satellite making meteorological observations and transmitting these observations to Earth.

***Meteorological watch office (MWO).*** An office designated to provide information concerning the occurrence or expected occurrence of specified en-route weather and other phenomena in the atmosphere that may affect the safety of aircraft operations within its specified area of responsibility.

***Minimum sector altitude.*** The lowest altitude which may be used which will provide a minimum clearance of 300 m (1 000 ft) above all objects located in an area contained within a sector of a circle of 46 km (25 NM) radius centred on a radio aid to navigation.

***Navigation specification.*** A set of aircraft and flight crew requirements needed to support performance-based navigation operations within a defined airspace. There are two kinds of navigation specifications:

***Required navigation performance (RNP) specification.*** A navigation specification based on area navigation that includes the requirement for performance monitoring and alerting, designated by the prefix RNP, e.g. RNP 4, RNP APCH.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Definitions	Chapter: 1	Page: 5

**Area navigation (RNAV) specification.** A navigation specification based on area navigation that does not include the requirement for performance monitoring and alerting, designated by the prefix RNAV, e.g. RNAV 5, RNAV 1.

*Note.— The Performance-based Navigation (PBN) Manual (ICAO Doc 9613), Volume II, contains detailed guidance on navigation specifications.*

**Observation (meteorological).** The evaluation of one or more meteorological elements.

**Operational control.** The exercise of authority over the initiation, continuation, diversion or termination of a flight in the interest of the safety of the aircraft and the regularity and efficiency of the flight.

**Operational flight plan.** The operator’s plan for the safe conduct of the flight based on considerations of aeroplane performance, other operating limitations and relevant expected conditions on the route to be followed and at the aerodromes concerned.

**Operational planning.** The planning of flight operations by an operator.

**Operator.** A person, organization or enterprise engaged in or offering to engage in an aircraft operation.

**Performance-based navigation (PBN).** Area navigation based on performance requirements for aircraft operating along an ATS route, on an instrument approach procedure or in a designated airspace.

*Note.— Performance requirements are expressed in navigation specification (RNAV specification, RNP specification) in terms of accuracy, integrity, continuity, availability and functionality needed for the proposed operation in the context of a particular airspace concept.*

**Pilot-in-command.** The pilot designated by the operator, or in the case of general aviation, the owner, as being in command and charged with the safe conduct of a flight.

**Prevailing visibility.** The greatest visibility value, observed in accordance with the definition of “visibility”, which is reached within at least half the horizon circle or within at least half of the surface of the aerodrome. These areas could comprise contiguous or non-contiguous sectors.

*Note.— This value may be assessed by human observation and/or instrumented systems. When instruments are installed, they are used to obtain the best estimate of the prevailing visibility.*

**Prognostic chart.** A forecast of a specified meteorological element(s) for a specified time or period and a specified surface or portion of airspace, depicted graphically on a chart.

**Quality assurance.** Part of quality management focused on providing confidence that quality requirements will be fulfilled (ISO 9000<sup>1</sup>).

**Quality control.** Part of quality management focused on fulfilling quality requirements (ISO 9000\*)

**Quality management.** Coordinated activities to direct and control an organization with regard to quality (ISO 9000).

**Regional air navigation agreement.** Agreement approved by the Council of ICAO normally on the advice of a regional air navigation meeting.

<sup>1</sup> ISO Standard 9000 — Quality Management Systems — Fundamentals and Vocabulary.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Definitions	Chapter: 1	Page: 6

**Reporting point.** A specified geographical location in relation to which the position of an aircraft can be reported.

**Rescue coordination centre.** A unit responsible for promoting efficient organization of search and rescue services and for coordinating the conduct of search and rescue operations within a search and rescue region.

**Runway.** A defined rectangular area on a land aerodrome prepared for the landing and take-off of aircraft.

**Runway visual range (RVR).** The range over which the pilot of an aircraft on the centre line of a runway can see the runway surface markings or the lights delineating the runway or identifying its centre line.

**Search and rescue services unit.** A generic term meaning, as the case may be, rescue coordination centre, rescue subcentre or alerting post.

**SIGMET information.** Information issued by a meteorological watch office concerning the occurrence or expected occurrence of specified en-route weather and other phenomena in the atmosphere that may affect the safety of aircraft operations.

**Space weather centre (SWXC).** A centre designated to monitor and provide advisory information on space weather phenomena expected to affect high-frequency radio communications, communications via satellite, GNSS-based navigation and surveillance systems and/or pose a radiation risk to aircraft occupants.

*Note.* – A space weather centre is designated as global and/or regional.

**Standard isobaric surface.** An isobaric surface used on a worldwide basis for representing and analyzing the conditions in the atmosphere.

**State volcano observatory.** A volcano observatory, designated by regional air navigation agreement, to monitor active or potentially active volcanoes within a State and to provide information on volcanic activity to its associated area control centre/flight information centre, meteorological watch office and volcanic ash advisory centre

**Threshold.** The beginning of that portion of the runway usable for landing.

**Touchdown zone.** The portion of a runway, beyond the threshold, where it is intended landing aeroplanes first contact the runway.

**Tropical cyclone.** Generic term for a non-frontal synoptic-scale cyclone originating over tropical or sub-tropical waters with organized convection and definite cyclonic surface wind circulation.

**Tropical cyclone advisory centre (TCAC).** A meteorological centre designated by regional air navigation agreement to provide advisory information to meteorological watch offices, world area forecast centres and international OPMET databanks regarding the position, forecast direction and speed of movement, central pressure and maximum surface wind of tropical cyclones.

**Upper-air chart.** A meteorological chart relating to a specified upper-air surface or layer of the atmosphere.

**Visibility.** Visibility for aeronautical purposes is the greater of:

- a) the greatest distance at which a black object of suitable dimensions, situated near the ground, can be seen and recognized when observed against a bright background;
- b) the greatest distance at which lights in the vicinity of 1 000 candelas can be seen and identified against an unlit background.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Definitions	Chapter: 1	Page: 7

*Note.— The two distances have different values in air of a given extinction coefficient, and the latter b) varies with the background illumination. The former a) is represented by the meteorological optical range (MOR).*

**Volcanic ash advisory centre (VAAC).** A meteorological centre designated by regional air navigation agreement to provide advisory information to meteorological watch offices, area control centres, flight information centres, world area forecast centres and international OPMET databanks regarding the lateral and vertical extent and forecast movement of volcanic ash in the atmosphere.

**VOLMET.** Meteorological information for aircraft in flight.

**Data link-VOLMET (D-VOLMET).** Provision of current aerodrome routine meteorological reports (METAR) and aerodrome special meteorological reports (SPECI), aerodrome forecasts (TAF), SIGMET, special air-reports not covered by a SIGMET and, where available, AIRMET via data link.

**VOLMET broadcast.** Provision, as appropriate, of current METAR, SPECI, TAF and SIGMET by means of continuous and repetitive voice broadcasts.

**World area forecast centre (WAFc).** A meteorological centre designated to prepare and issue significant weather forecasts and upper-air forecasts in digital form on a global basis direct to States using aeronautical fixed service internet-based services.

**World area forecast system (WAFS).** A worldwide system by which world area forecast centres provide aeronautical meteorological en-route forecasts in uniform standardized formats.

## 1.2 Terms used with a limited meaning

For the purpose of this document, the following terms are used with a limited meaning as indicated below:

- a) to avoid confusion in respect of the term “service” between the meteorological service considered as an administrative entity and the service which is provided, “meteorological authority” is used for the former and “service” for the latter;
- b) “provide” is used solely in connection with the provision of service;
- c) “issue” is used solely in connection with cases where the obligation specifically extends to sending out the information to a user;
- d) “make available” is used solely in connection with cases where the obligation ends with making the information accessible to a user; and
- e) “supply” is used solely in connection with cases where either c) or d) applies.

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	WAFS and Meteorological Offices	Chapter: 3	Page: 1

## **CHAPTER 2. GENERAL PROVISIONS**

### **2.1 Objective, determination and provision of meteorological service**

2.1.1 The objective of meteorological service for international and domestic air navigation shall be to contribute towards the safety, regularity and efficiency of international and domestic air navigation.

2.1.2 This objective shall be achieved by supplying the following users: operators, flight crew members, air traffic services units, search and rescue services units, airport managements and others concerned with the conduct or development of international and domestic air navigation, with the meteorological information necessary for the performance of their respective functions.

2.1.3 This document describes the meteorological services to be provided by the designated MET service provider within Bhutan to meet the needs of international and domestic air navigation. This determination shall be made in accordance with the provisions of this document and in accordance with regional air navigation agreement.

2.1.4 The designated MET service provider shall arrange for the provision of meteorological services for national and international air navigation. Details of the designated MET service provider shall be included in the aeronautical information publication (AIP), in accordance with BCAR - 15, Chapter 5.

*Note.— Detailed specifications concerning presentation and contents of the aeronautical information publication is provided in PANS-AIM (ICAO Doc 10066), Appendix 2.*

2.1.5 The designated MET service provider shall comply with the requirements of the World Meteorological Organization (WMO) in respect of qualifications, competencies, education and training of meteorological personnel providing service for international air navigation, as stipulated in the Technical Regulations (WMO-No. 49), Volume I — General Meteorological Standards and Recommended Practices, Part V — Qualifications and Competencies of Personnel Involved in the Provision of Meteorological (Weather and Climate) and Hydrological Services, Part VI — Education and Training of Meteorological Personnel, and Appendix A-Basic Instruction Packages.

### **2.2. Supply, use, quality management and interpretation of meteorological information**

2.2.1 Close liaison shall be maintained between those concerned with the supply and those concerned with the use of meteorological information on matters which affect the provision of meteorological service for national and international air navigation.

2.2.2 The designated MET service provider shall establish and implement a properly organized quality system comprising procedures, processes and resources necessary to provide for the quality management of the meteorological information to be supplied to the users listed in 2.1.2.

2.2.3 The quality system established in accordance with 2.2.2 should be in conformity with the International Organization for Standardization (ISO) 9000 series of quality assurance standards and should be certified by an approved organization.

*Note.— The ISO 9000 series of quality assurance standards provide a basic framework for the development of a quality assurance programme. The details of a successful programme are unique to the organization. Guidance on the establishment and implementation of a quality management system is given in the Guide to the Implementation of Quality Management Systems for National Meteorological and Hydrological Services and Other Relevant Service Providers (WMO-No. 1100).*

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>		BCAR - 3	
	WAFS and Meteorological Offices		Chapter: 3	Page: 2

2.2.4 The quality system should provide the users with assurance that the meteorological information supplied complies with the stated requirements in terms of the geographical and spatial coverage, format and content, time and frequency of issuance and period of validity, as well as the accuracy of measurements, observations and forecasts. When the quality system indicates that meteorological information to be supplied to the users does not comply with the stated requirements, and automatic error correction procedures are not appropriate, such information should not be supplied to the users unless it is validated with the originator.

*Note.— Requirements concerning the geographical and spatial coverage, format and content, time and frequency of issuance and period of validity of meteorological information to be supplied to aeronautical users are given in Chapters 3, 4, 6, 7, 8, 9 and 10 and Appendices 2, 3, 5, 6, 7, 8 and 9 of this document and the relevant regional air navigation plans. Guidance concerning the accuracy of measurement and observation, and accuracy of forecasts is given in Attachments A and B, respectively, to this document.*

2.2.5 In regard to the exchange of meteorological information for operational purposes the quality system should include verification and validation procedures and resources for monitoring adherence to the prescribed transmission schedules for individual messages and/or bulletins required to be exchanged, and the times of their filing for transmission. The quality system should be capable of detecting excessive transit times of messages and bulletins received.

*Note.— Requirements concerning the exchange of operational meteorological information are given in Chapter 11 and Appendix 10 of this document.*

2.2.6 Demonstration of compliance of the quality system applied shall be by audit. If non-conformity of the system is identified, action shall be initiated to determine and correct the cause. All audit observations shall be evidence-based and properly documented.

2.2.7 Owing to the variability of meteorological elements in space and time, to limitations of observing techniques and to limitations caused by the definitions of some of the elements, the specific value of any of the elements given in a report shall be understood by the recipient to be the best approximation of the actual conditions at the time of observation.

*Note.— Guidance on the operationally desirable accuracy of measurement or observation is given in Attachment A.*

2.2.8 Owing to the variability of meteorological elements in space and time, to limitations of forecasting techniques and to limitations caused by the definitions of some of the elements, the specific value of any of the elements given in a forecast shall be understood by the recipient to be the most probable value which the element is likely to assume during the period of the forecast. Similarly, when the time of occurrence or change of an element is given in a forecast, this time shall be understood to be the most probable time.

*Note.— Guidance on the operationally desirable accuracy of forecasts is given in Attachment B*

2.2.9 The meteorological information supplied to the users listed in 2.1.2 shall be consistent with Human Factors principles and shall be in forms which require a minimum of interpretation by these users, as specified in the following chapters.

*Note.— Guidance material on the application of Human Factors principles can be found in the Human Factors Training Manual (ICAO Doc 9683).*

2.2.10 The designated meteorological authority shall ensure that the meteorological information supplied to the users listed in 2.1.2 is provided through information services.

*Note 1.— In the context of system-wide information management (SWIM), the notion of information service*

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	WAFS and Meteorological Offices	Chapter: 3	Page: 3

*addresses machine-to-machine interaction in a service-oriented architecture.*

*Note 2.— Procedures on information services are contained in the Procedures for Air Navigation Services — Information Management (PANS-IM, Doc 10199).*

*Note 3.— Guidance material on information services can be found in the Manual on System-wide Information Management Implementation (Doc 10203).*

### **2.3 Notifications required from operators**

2.3.1 An operator requiring meteorological service or changes in existing meteorological service shall notify, sufficiently in advance, the designated meteorological authority or the aerodrome meteorological office concerned. The minimum amount of advance notice required shall be as agreed between the designated MET service provider or aerodrome meteorological office and the operator concerned.

2.3.2 The designated MET service provider shall be notified by the operator requiring service when:

- a) new routes or new types of operations are planned;
- b) changes of a lasting character are to be made in scheduled operations; and
- c) other changes, affecting the provision of meteorological service, are planned.

Such information shall contain all details necessary for the planning of appropriate arrangements by the designated MET service provider .

2.3.3 The aerodrome meteorological office, or the meteorological office concerned, shall be notified by the operator or a flight crew member:

- a) of flight schedules;
- b) when non-scheduled flights are to be operated; and
- c) when flights are delayed, advanced or cancelled.

2.3.4 The notification to the aerodrome meteorological office of individual flights should contain the following information except that, in the case of scheduled flights, the requirement for some or all of this information may be waived as agreed between the meteorological office and the operator concerned.

- a) aerodrome of departure and estimated time of departure;
- b) destination and estimated time of arrival;
- c) route to be flown and estimated times of arrival at, and departure from, any intermediate aerodrome(s);
- d) alternate aerodromes needed to complete the operational flight plan and taken from the relevant list contained in the regional air navigation plan;
- e) cruising level;
- f) type of flight, whether under visual or instrument flight rules;

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	WAFS and Meteorological Offices	Chapter: 3	Page: 4

- g) type of meteorological information requested for a flight crew member, whether flight documentation and/or briefing or consultation; and
- h) time (s) at which briefing, consultation and/or flight documentation are required

---

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	WAFS and Meteorological Offices	Chapter: 3	Page: 1

## **CHAPTER 3. GLOBAL SYSTEMS, SUPPORTING CENTRES AND METEOROLOGICAL OFFICES**

*Note.— Technical specifications and detailed criteria related to this chapter are given in Appendix 2.*

### **3.1 (Reserved for WAFS)**

### **3.2 (Reserved for WAFC)**

### **3.3 Aerodrome meteorological offices**

3.3.1 The designated MET service provider shall establish one or more aerodrome and/or other meteorological offices which shall be adequate for the provision of the meteorological service required to satisfy the needs of international and domestic air navigation.

3.3.2 An aerodrome meteorological office shall carry out all or some of the following functions as necessary to meet the needs of flight operations at the aerodrome:

- a) prepare and/or obtain forecasts and other relevant information for flights with which it is concerned; the extent of its responsibilities to prepare forecasts shall be related to the local availability and use of en-route and aerodrome forecast material received from other offices;
- b) prepare and/or obtain forecasts of local meteorological conditions;
- c) maintain a continuous survey of meteorological conditions over the aerodromes for which it is designated to prepare forecasts;
- d) provide briefing, consultation and flight documentation to flight crew members and/or other flight operations personnel;
- e) supply other meteorological information to aeronautical users;
- f) display the available meteorological information;
- g) exchange meteorological information with other aerodrome meteorological offices; and
- h) supply information received on pre-eruption volcanic activity, a volcanic eruption or volcanic ash cloud, to its associated air traffic services unit, aeronautical information service unit and meteorological watch office (MWO) as agreed between the meteorological, aeronautical information service and ATS authorities concerned.

3.3.3 The aerodromes for which landing forecasts are required shall be determined by regional air navigation agreement.

3.3.4 For an aerodrome without an aerodrome meteorological office located at the aerodrome:

- a) The designated MET service provider shall establish one or more aerodrome meteorological office(s) to supply meteorological information as required; and

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	WAFS and Meteorological Offices	Chapter: 3	Page: 2

- b) The designated MET service provider shall establish means by which such information can be supplied to the aerodromes concerned.

### 3.4 Meteorological watch offices

3.4.1 The designated MET service provider shall establish, in accordance with regional air navigation agreement, one or more MWOs.

3.4.2 An MWO shall:

- a) maintain continuous watch over meteorological conditions affecting flight operations within its area of responsibility;
- b) prepare SIGMET and other information relating to its area of responsibility;
- c) supply SIGMET information and, as required, other meteorological information to associated air traffic services units;
- d) disseminate SIGMET information;
- e) when required by regional air navigation agreement, in accordance with 7.2.1:
  - 1) prepare AIRMET information related to its area of responsibility;
  - 2) supply AIRMET information to associated air traffic services units; and
  - 3) disseminate AIRMET information.
- f) supply information received on pre-eruption volcanic activity, a volcanic eruption and volcanic ash cloud for which a SIGMET has not already been issued, to its associated area control centre (ACC)/flight information centre (FIC), as agreed between the meteorological and ATS authorities concerned, and to its associated VAAC as determined by regional air navigation agreement; and
- g) supply information received concerning the release of radioactive materials into the atmosphere, in the area for which it maintains watch or adjacent areas, to its associated ACC/FIC, as agreed between the meteorological and ATS authorities concerned, and to aeronautical information service units, as agreed between the meteorological and appropriate civil aviation authorities concerned. The information shall comprise location, date and time of the release, and forecast trajectories of the radioactive materials.

*Note.— The information is provided by RSMCs for the provision of transport model products for radiological environmental emergency response, at the request of the delegated authority of the State in which the radioactive material was released into the atmosphere, or the International Atomic Energy Agency (IAEA). The information is sent by the RSMC to a single contact point of the national meteorological service in each State. This contact point has the responsibility of redistributing the RSMC products within the State concerned. Furthermore, the information is provided by IAEA to RSMC co-located with VAAC London (designated as the focal point) which in turn notifies the ACCs/FICs concerned about the release.*

3.4.3 The boundaries of the area over which meteorological watch is to be maintained by an MWO should be coincident with the boundaries of an FIR or a CTA or a combination of FIRs and/or CTAs.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	WAFS and Meteorological Offices	Chapter: 3	Page: 3

3.4.4 An MWO should coordinate SIGMET with neighbouring MWO(s), especially when the en-route weather phenomenon extends or is expected to extend beyond the MWO's specified area of responsibility, in order to ensure harmonized SIGMET provision.

*Note.— Guidance on the bilateral or multilateral coordination between MWOs of Contracting States for the provision of SIGMET can be found in the Manual of Aeronautical Meteorological Practice (ICAO Doc 8896).*

### **3.5 Volcanic ash advisory centres**

(Not applicable)

### **3.6 State volcano observatories**

(Not applicable)

### **3.7 Tropical cyclone advisory centres**

(Not applicable)

### **3.8 Space weather centres (SWXC)**

(Not applicable)

---

	<b>Meteorological Service</b>	BCAR - 3	
	Meteorological Observations and Reports	Chapter: 4	Page: 1

## CHAPTER 4. METEOROLOGICAL OBSERVATIONS AND REPORTS

*Note.— Technical specifications and detailed criteria related to this chapter are given in Appendix 3.*

### 4.1 Aeronautical meteorological stations and observations

4.1.1 The designated MET service provider shall establish, at aerodromes in Bhutan, such aeronautical meteorological stations as it determines to be necessary. An aeronautical meteorological station may be a separate station or may be combined with a synoptic station.

*Note.— Aeronautical meteorological stations may include sensors installed outside the aerodrome, where considered justified, by the MET service provider to ensure the compliance of meteorological service for international and domestic air navigation with the provisions of this document.*

4.1.2 (Reserved)

4.1.3 Aeronautical meteorological stations shall make routine observations at fixed intervals. At aerodromes, the routine observations shall be supplemented by special observations whenever specified changes occur in respect of surface wind, visibility, runway visual range, present weather, clouds and/or air temperature.

4.1.4 The designated MET service provider shall arrange for its aeronautical meteorological stations to be inspected at sufficiently frequent intervals to ensure that a high standard of observation is maintained, that instruments and all their indicators are functioning correctly, and that the exposure of the instruments has not changed significantly.

*Note.— Guidance on the inspection of aeronautical meteorological stations including the frequency of inspections is given in the Manual on Automatic Meteorological Observing Systems at Aerodromes (ICAO Doc 9837)*

4.1.5 At aerodromes with runways intended for Category II and III instrument approach and landing operations, automated equipment for measuring or assessing, as appropriate, and for monitoring and remote indicating of surface wind, visibility, runway visual range, height of cloud base, air and dew-point temperatures and atmospheric pressure shall be installed to support approach and landing and take-off operations. These devices shall be integrated automatic systems for acquisition, processing, dissemination and display in real time of the meteorological parameters affecting landing and takeoff operations. The design of integrated automatic systems shall observe Human Factors principles and include back-up procedures.

*Note 1.— Categories of precision approach and landing operations are defined in BCAR OPS.*

*Note 2.— Guidance material on the application of Human Factors principles can be found in the Human Factors Training Manual (ICAO Doc 9683).*

4.1.6 At aerodromes with runways intended for Category I instrument approach and landing operations, automated equipment for measuring or assessing, as appropriate, and for monitoring and remote indicating of surface wind, visibility, runway visual range, height of cloud base, air and dew-point temperatures and atmospheric pressure should be installed to support approach and landing and take-off operations. These devices should be integrated automatic systems for acquisition, processing, dissemination and display in real

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Meteorological Observations and Reports	Chapter: 4	Page: 2

time of the meteorological parameters affecting landing and take-off operations. The design of integrated automatic systems should observe Human Factors principles and include back-up procedures.

4.1.7 Where an integrated semi-automatic system is used for the dissemination/display of meteorological information, it should be capable of accepting the manual insertion of data covering those meteorological elements which cannot be observed by automatic means.

4.1.8 The observations shall form the basis for the preparation of reports to be disseminated at the aerodrome of origin and of reports to be disseminated beyond the aerodrome of origin.

## 4.2 Agreement between air traffic services authorities and meteorological authorities

The MET service provider shall establish an agreement with the appropriate ATS authority to cover, among other things:

- a) the provision in air traffic services units of displays related to integrated automatic systems;
- b) the calibration and maintenance of these displays/instruments;
- c) the use to be made of these displays/instruments by air traffic services personnel;
- d) as and where necessary, supplementary visual observations (for example, of meteorological phenomena of operational significance in the climb-out and approach areas) if and when made by air traffic services personnel to update or supplement the information supplied by the meteorological station;
- e) meteorological information obtained from aircraft taking off or landing (for example, on wind shear); and
- f) if available, meteorological information obtained from ground weather radar.

*Note.— Guidance on the subject of coordination between ATS and aeronautical meteorological services is contained in the Manual on Coordination between Air Traffic Services, Aeronautical Information Services and Aeronautical Meteorological Services (ICAO Doc 9377).*

## 4.3 Routine observations and reports

4.3.1 At aerodromes, routine observations shall be made throughout the 24 hours of each day. Such observations shall be made at intervals of one hour or, if so determined by regional air navigation agreement, at intervals of one half-hour. At other aeronautical meteorological stations, such observations shall be made as determined by the designated MET service provider taking into account the requirements of air traffic services units and aircraft operations.

4.3.2 Reports of routine observations shall be issued as:

- a) local routine reports, only for dissemination at the aerodrome of origin, (intended for arriving and departing aircraft); and
- b) METAR for dissemination beyond the aerodrome of origin (mainly intended for flight planning, VOLMET broadcasts and D -VOLMET).

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Meteorological Observations and Reports	Chapter: 4	Page: 3

4.3.3 At aerodromes that are not operational throughout 24 hours in accordance with 4.3.1, METAR shall be issued prior to the aerodrome resuming operations in accordance with regional air navigation agreement.

#### **4.4 Special observations and reports**

4.4.1 A list of criteria for special observations shall be established by the MET service provider in consultation with the appropriate ATS authority, operators and others concerned.

4.4.2 Reports of special observations shall be issued as:

- a) local special reports, only for dissemination at the aerodrome of origin (intended for arriving and departing aircraft); and
- b) SPECI for dissemination beyond the aerodrome of origin (mainly intended for flight planning, VOLMET broadcasts and D-VOLMET) unless METAR are issued at half- hourly intervals.

4.4.3 At aerodromes that are not operational throughout 24 hours in accordance with 4.3.1, following the resumption of the issuance of METAR, SPECI shall be issued, as necessary.

#### **4.5 Contents of reports**

4.5.1 Local routine, local special reports, METAR and SPECI shall contain the following elements in the order indicated:

- a) identification of the type of report;
- b) location indicator;
- c) time of the observation;
- d) identification of an automated or missing report, when applicable;
- e) surface wind direction and speed;
- f) visibility;
- g) runway visual range, when applicable;
- h) present weather;
- i) cloud amount, cloud type (only for cumulonimbus and towering cumulus clouds) and height of cloud base or, where measured, vertical visibility;
- j) air temperature and dew-point temperature; and
- k) QNH and, when applicable, QFE (QFE included only in local routine and special reports).

*Note.— The location indicators referred to under b) and their significations are published in Location Indicators (ICAO Doc 7910).*

4.5.2 In addition to elements listed under 4.5.1 a) to k), local routine reports, special reports, METAR and SPECI should contain supplementary information to be placed after element k).

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Meteorological Observations and Reports	Chapter: 4	Page: 4

4.5.3 Optional elements included under supplementary information shall be included in METAR and SPECI in accordance with regional air navigation agreement.

## 4.6 Observing and reporting meteorological elements

### 4.6.1 Surface wind

4.6.1.1 The mean direction and the mean speed of the surface wind shall be measured, as well as significant variations of the wind direction and speed, and reported in degrees true and metres per second (or knots), respectively.

4.6.1.2 When local routine and special reports are used for departing aircraft, the surface wind observations for these reports should be representative of conditions along the runway; when local routine and special reports are used for arriving aircraft, the surface wind observations for these reports should be representative of the touchdown zone.

4.6.1.3 For METAR and SPECI, the surface wind observations should be representative of conditions above the whole runway where there is only one runway and the whole runway complex where there is more than one runway.

### 4.6.2 Visibility

4.6.2.1 The visibility as defined in Chapter 1 shall be measured or observed, and reported in metres or kilometres.

*Note.— Guidance on the conversion of instrument readings into visibility is given in Attachment D.*

4.6.2.2 When local routine, special reports are used for departing aircraft, the visibility observations for these reports should be representative of conditions along the runway; when local routine and special reports are used for arriving aircraft, the visibility observations for these reports should be representative of the touchdown zone of the runway.

4.6.2.3 For METAR and SPECI, the visibility observations should be representative of the aerodrome.

### 4.6.3 Runway visual range

*Note.— Guidance on the subject of runway visual range is contained in the Manual of Runway Visual Range Observing and Reporting Practices (ICAO Doc 9328).*

4.6.3.1 Runway visual range as defined in Chapter 1 shall be assessed on all runways intended for Category II and III instrument approach and landing operations.

4.6.3.2 Runway visual range as defined in Chapter 1 should be assessed on all runways intended for use during periods of reduced visibility, including:

- a) precision approach runways intended for Category I instrument approach and landing operations; and
- b) runways used for take-off and having high-intensity edge lights and/or centre line lights.

*Note.— Precision approach runways are defined in Annex 14, Volume I, Chapter 1, under “Instrument runway”.*

4.6.3.3 The runway visual range, assessed in accordance with 4.6.3.1 and 4.6.3.2, shall be reported in metres throughout periods when either the visibility or the runway visual range is less than 1 500 m.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Meteorological Observations and Reports	Chapter: 4	Page: 5

4.6.3.4 Runway visual range assessments shall be representative of:

- a) the touchdown zone of the runway intended for non-precision or Category I instrument approach and landing operations;
- b) the touchdown zone and the mid-point of the runway intended for Category II instrument approach and landing operations; and
- c) the touchdown zone, the mid-point and stop-end of the runway intended for Category III instrument approach and landing operations.

4.6.3.5 The units providing air traffic service and aeronautical information service for an aerodrome shall be kept informed without delay of changes in the serviceability status of the automated equipment used for assessing runway visual range.

#### 4.6.4 Present weather

4.6.4.1 The present weather occurring at the aerodrome shall be observed and reported as necessary. The following present weather phenomena shall be identified, as a minimum: rain, drizzle, snow and freezing precipitation (including intensity thereof), haze, mist, fog, freezing fog and thunderstorms (including thunderstorms in the vicinity).

4.6.4.2 For local routine and special reports, the present weather information should be representative of conditions at the aerodrome.

4.6.4.3 For METAR and SPECI, the present weather information should be representative of conditions at the aerodrome and, for certain specified present weather phenomena, in its vicinity.

#### 4.6.5 Clouds

4.6.5.1 Cloud amount, cloud type and height of cloud base shall be observed and reported as necessary to describe the clouds of operational significance. When the sky is obscured, vertical visibility shall be observed and reported, where measured, in lieu of cloud amount, cloud type and height of cloud base. The height of cloud base and vertical visibility shall be reported in metres (or feet).

4.6.5.2 The cloud observations for local routine and special reports should be representative of the runway threshold(s) in use.

4.6.5.3 The cloud observations for METAR and SPECI should be representative of the aerodrome and its vicinity.

#### 4.6.6 Air temperature and dew-point temperature

4.6.6.1 The air temperature and the dew-point temperature shall be measured and reported in degrees Celsius.

4.6.6.2 The observations of air temperature and dew-point temperature for local routine reports, local special reports, METAR and SPECI should be representative of the whole runway complex.

#### 4.6.7 Atmospheric pressure

The atmospheric pressure shall be measured, and QNH and QFE values shall be computed and reported in hectopascals.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Meteorological Observations and Reports	Chapter: 4	Page: 6

#### 4.6.8 Supplementary information

Observations made at aerodromes shall include the available supplementary information concerning significant meteorological conditions, particularly those in the approach and climb-out areas. Where practicable, the information should identify the location of the meteorological condition.

### 4.7 Reporting meteorological information from automatic observing systems

4.7.1 METAR and SPECI from automatic observing systems should be used during non-operational hours of the aerodrome, and during operational hours of the aerodrome as determined by the MET service provider in consultation with users based on the availability and efficient use of personnel.

*Note.— Guidance on the use of automatic meteorological observing systems is given in ICAO Doc 9837*

4.7.2 Local routine and special reports from automatic observing systems shall be used during operational hours of the aerodrome as determined by the MET service provider in consultation with users based on the availability and efficient use of personnel.

4.7.3 Local routine reports, local special reports, METAR and SPECI from automatic observing systems shall be identified with the word “AUTO”.

### 4.8 Observations and reports of volcanic activity

The occurrence of pre-eruption volcanic activity, volcanic eruptions and volcanic ash cloud should be reported without delay to the associated air traffic services unit, aeronautical information services unit and meteorological watch office. The report should be made in the form of a volcanic activity report comprising the following information in the order indicated:

- a) message type, VOLCANIC ACTIVITY REPORT;
- b) station identifier, location indicator or name of station;
- c) date/time of message;
- d) location of volcano and name if known; and
- e) concise description of event including, as appropriate, level of intensity of volcanic activity, occurrence of an eruption and its date and time, and the existence of a volcanic ash cloud in the area together with direction of ash cloud movement and height.

*Note.— Pre-eruption volcanic activity in this context means unusual and/or increasing volcanic activity which could presage a volcanic eruption.*

---

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Aircraft Observations and Reports	Chapter: 5	Page: 1

## **CHAPTER 5. AIRCRAFT OBSERVATIONS AND REPORTS**

*Note.— Technical specifications and detailed criteria related to this chapter are given in Appendix 4.*

### **5.1 Obligations of the state**

The designated MET service provider shall arrange, according to the provisions of this chapter, for observations to be made by aircraft registered with BCAA operating on international and domestic air routes and for the recording and reporting of these observations.

### **5.2 Types of aircraft observations**

The following aircraft observations shall be made:

- a) routine aircraft observations during en-route and climb-out phases of the flight; and
- b) special and other non-routine aircraft observations during any phase of the flight.

### **5.3 Routine aircraft observations-designation**

5.3.1 When air-ground data link is used and automatic dependent surveillance — contract (ADS-C) or secondary surveillance radar (SSR) Mode S is being applied, automated routine observations should be made every 15 minutes during the en-route phase and every 30 seconds during the climb-out phase for the first 10 minutes of the flight.

5.3.2 For helicopter operations to and from aerodromes on offshore structures, routine observations should be made from helicopters at points and times as agreed between the meteorological authorities and the helicopter operators concerned.

5.3.3 In the case of air routes with high-density air traffic (e.g. organized tracks), an aircraft from among the aircraft operating at each flight level shall be designated, at approximately hourly intervals, to make routine observations in accordance with 5.3.1. The designation procedures shall be in accordance with regional air navigation agreement.

5.3.4 In the case of the requirement to report during the climb-out phase, an aircraft shall be designated, at approximately hourly intervals, at each aerodrome to make routine observations in accordance with 5.3.1.

### **5.4 Routine aircraft observations-exemption**

Aircraft not equipped with air-ground data link shall be exempted from making routine aircraft observations.

### **5.5 Special aircraft observations**

Special observations shall be made by all aircraft whenever the following conditions are encountered or observed:

- a) moderate or severe turbulence; or
- b) moderate or severe icing; or

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Aircraft Observations and Reports	Chapter: 5	Page: 2

- c) severe mountain wave; or
- d) thunderstorms, without hail, that are obscured, embedded, widespread or in squall lines; or
- e) thunderstorms, with hail, that are obscured, embedded, widespread or in squall lines;
- f) heavy duststorm or heavy sandstorm; or
- g) volcanic ash cloud; or
- h) pre-eruption volcanic activity or a volcanic eruption; or

*Note.— Pre-eruption volcanic activity in this context means unusual and/or increasing volcanic activity which could presage a volcanic eruption.*

- i) runway braking action encountered is not as good as reported

### **5.6 Other non-routine aircraft observations**

When other meteorological conditions not listed under 5.5, e.g. wind shear, are encountered and which, in the opinion of the pilot-in-command, may affect the safety or markedly affect the efficiency of other aircraft operations, the pilot-in-command shall advise the appropriate air traffic services unit as soon as practicable.

*Note.— Icing, turbulence and, to a large extent, wind shear are elements which, for the time being, cannot be satisfactorily observed from the ground and for which in most cases aircraft observations represent the only available evidence.*

### **5.7 Reporting of aircraft observations during flight**

5.7.1 Aircraft observations shall be reported by air-ground data link. Where air-ground data link is not available or appropriate, aircraft observations during flight shall be reported by voice communications.

5.7.2 Aircraft observations shall be reported during flight at the time the observation is made or as soon thereafter as is practicable.

5.7.3 Aircraft observations shall be reported as air-reports.

### **5.8 Relay of air-reports by ATS units**

The designated MET service provider shall make arrangements with the appropriate ATS authority to ensure that, on receipt by the air traffic services units of:

- a) special air-reports by voice communications, the air traffic services units relay them without delay to their associated meteorological watch office; and
- b) routine and special air-reports by data link communications, the air traffic services units relay them without delay to their associated meteorological watch office.

### **5.9 Recording and post flight reporting of aircraft observations of volcanic activity**

Special aircraft observations of pre-eruption volcanic activity, a volcanic eruption or volcanic ash cloud shall be recorded on the special air-report of volcanic activity form. The designated MET service provider shall

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Aircraft Observations and Reports	Chapter: 5	Page: 3

include with the flight documentation provided to flights operating on routes which, in its opinion could be affected by volcanic ash clouds.

---

	<b>Meteorological Service</b>	BCAR - 3	
	Forecasts	Chapter: 6	Page: 1

## CHAPTER 6. FORECASTS

*Note.— Technical specifications and detailed criteria related to this chapter are given in Appendix 5.*

### 6.1 Use of forecasts

The issue of a new forecast by an aerodrome meteorological office, such as a routine aerodrome forecast, shall be understood to cancel automatically any forecast of the same type previously issued for the same place and for the same period of validity or part thereof.

### 6.2 Aerodrome forecasts

6.2.1 An aerodrome forecast shall be prepared by the aerodrome meteorological office designated by the meteorology authority concerned.

*Note.— The aerodromes for which aerodrome forecasts are to be prepared and the period of validity of these forecasts are listed in the relevant facilities and services implementation document (FASID).*

6.2.2 An aerodrome forecast shall be issued at a specified time not earlier than one hour prior to the beginning of its validity period and consist of a concise statement of the expected meteorological conditions at an aerodrome for a specified period.

6.2.3 Aerodrome forecasts and amendments thereto shall be issued as TAF and include the following information in the order indicated:

- a) identification of the type of forecast;
- b) location indicator;
- c) time of issue of forecast;
- d) identification of a missing forecast, when applicable;
- e) date and period of validity of forecast;
- f) identification of a cancelled forecast, when applicable;
- g) surface wind;
- h) visibility;
- i) weather;
- j) cloud; and
- k) expected significant changes to one or more of these elements during the period of validity.

Optional elements shall be included in TAF in accordance with regional air navigation agreement.

*Note.— The visibility included in TAF refers to the forecast prevailing visibility.*

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Forecasts	Chapter: 6	Page: 2

6.2.4 Aerodrome meteorological offices preparing TAF shall keep the forecasts under continuous review and, when necessary, shall issue amendments promptly. The length of the forecast messages and the number of changes indicated in the forecast shall be kept to a minimum.

*Note.— Guidance on methods to keep TAF under continuous review is given in Chapter 3 of the Manual of Aeronautical Meteorological Practice (ICAO Doc 8896).*

6.2.5 TAF that cannot be kept under continuous review shall be cancelled.

6.2.6 The period of validity of a routine TAF should be not less than 6 hours or more than 30 hours; the period of validity should be as per regional air navigation agreement. Routine TAF valid for less than 12 hours should be issued every 3 hours and those valid for 12 to 30 hours should be issued every 6 hours.

6.2.7 When issuing TAF, meteorological offices shall ensure that not more than one TAF is valid at an aerodrome at any given time.

### **6.3 Landing forecasts**

6.3.1 A landing forecast shall be prepared by the aerodrome meteorological office concerned as determined by local agreement and regional air navigation agreement; such forecasts are intended to meet the requirements of local users and of aircraft within about one hour's flying time from the aerodrome.

6.3.2 Landing forecasts shall be prepared in the form of a trend forecast.

6.3.3 A trend forecast shall consist of a concise statement of the expected significant changes in the meteorological conditions at that aerodrome to be appended to a local routine report, local special report, METAR or SPECI. The period of validity of a trend forecast shall be 2 hours from the time of the report which forms part of the landing forecast.

### **6.4 Forecasts for take-off**

6.4.1 A forecast for take-off shall be prepared by the aerodrome meteorological office as agreed between the designated MET service provider and the operators concerned.

6.4.2 A forecast for take-off should refer to a specified period of time and should contain information on expected conditions over the runway complex in regard to surface wind direction and speed and any variations thereof, temperature, pressure (QNH), and any other elements as agreed locally.

6.4.3 A forecast for take-off should be supplied to operators and flight crew members on request within the 3 hours before the expected time of departure.

6.4.4 Aerodrome meteorological offices preparing forecasts for take-off should keep the forecasts under continuous review and, when necessary, should issue amendments promptly.

### **6.5 Area forecasts for low-level flights**

6.5.1 When the density of traffic operating below flight level 100 (or up to flight level 150 in mountainous areas, or higher, where necessary) warrants the routine issue and dissemination of area forecasts for such operations, the frequency of issue, the form and the fixed time or period of validity of those forecasts and the criteria for amendments thereto shall be determined by the designated MET service provider in consultation with the users.

6.5.2 When the density of traffic operating below flight level 100 warrants the issuance of AIRMET information in accordance with 7.2.1, area forecasts for such operations shall be prepared in a format as agreed

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Forecasts	Chapter: 6	Page: 3

between the meteorological authorities concerned. When abbreviated plain language is used, the forecast shall be prepared as a GAMET area forecast, employing approved ICAO abbreviations and numerical values; when chart form is used, the forecast shall be prepared as a combination of forecasts of upper wind and upper-air temperature, and of SIGWX phenomena. The area forecasts shall be issued to cover the layer between the ground and flight level 100 (or up to flight level 150 in mountainous areas, or higher, where necessary) and shall contain information on en-route weather phenomena hazardous to low-level flights, in support of the issuance of AIRMET information, and additional information required by low-level flights.

6.5.3 Area forecasts for low-level flights prepared in support of the issuance of AIRMET information shall be issued every 6 hours for a period of validity of 6 hours and transmitted to meteorological offices concerned not later than one hour prior to the beginning of their validity period.

---

	<b>Meteorological Service</b>	BCAR - 3	
	SIGMET and AIRMET Information, Aerodrome Warnings and Wind Shear Warnings and Alerts	Chapter: 7	Page: 1

## **CHAPTER 7. SIGMET AND AIRMET INFORMATION, AERODROME WARNINGS AND WIND SHEAR WARNINGS AND ALERTS**

*Note.— Technical specifications and detailed criteria related to this chapter are given in Appendix 6.*

### **7.1 SIGMET information**

7.1.1 SIGMET information shall be issued by a meteorological watch office and shall give a concise description in abbreviated plain language concerning the occurrence or expected occurrence of specified en-route weather and other phenomena in the atmosphere that may affect the safety of aircraft operations, and of the development of those phenomena in time and space.

7.1.2 SIGMET information shall be cancelled when the phenomena are no longer occurring or are no longer expected to occur in the area.

7.1.3 The period of validity of a SIGMET message shall be not more than 4 hours.

7.1.4 SIGMET messages concerning volcanic ash cloud and tropical cyclones should be based on advisory information provided by VAACs and TCACs, respectively, designated by regional air navigation agreement

7.1.5 Close coordination shall be maintained between the meteorological watch office and the associated area control centre/flight information centre to ensure that information on volcanic ash included in SIGMET and NOTAM messages is consistent.

7.1.6 SIGMET messages shall be issued not more than 4 hours before the commencement of the period of validity. In the special case of SIGMET messages for volcanic ash cloud and tropical cyclones, these messages shall be issued as soon as practicable but not more than 12 hours before the commencement of the period of validity. SIGMET messages for volcanic ash and tropical cyclones shall be updated at least every 6 hours.

### **7.2 AIRMET information**

7.2.1 AIRMET information shall be issued by a meteorological watch office in accordance with regional air navigation agreement, taking into account the density of air traffic operating below flight level 100. AIRMET information shall give a concise description in abbreviated plain language concerning the occurrence and/or expected occurrence of specified en-route weather phenomena, which have not been included in Section I of the area forecast for low-level flights issued in accordance with 6.5 and which may affect the safety of low-level flights, and of the development of those phenomena in time and space.

7.2.2 AIRMET information shall be cancelled when the phenomena are no longer occurring or are no longer expected to occur in the area.

7.2.3 The period of validity of an AIRMET message shall be not more than 4 hours.

### **7.3 Aerodrome warnings**

7.3.1 Aerodrome warnings shall be issued by the aerodrome meteorological office and shall give concise information of meteorological conditions which could adversely affect aircraft on the ground, including parked aircraft, and the aerodrome facilities and services.

7.3.2 Aerodrome warnings should be cancelled when the conditions are no longer occurring and/or no longer expected to occur at the aerodrome.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	SIGMET and AIRMET Information, Aerodrome Warnings and Wind Shear Warnings and Alerts	Chapter: 7	Page: 2

#### 7.4 Wind shear warnings and alerts

*Note.— Guidance on the subject is contained in the Manual on Low-level Wind Shear (ICAO Doc 9817). Wind shear alerts are expected to complement wind shear warnings and together are intended to enhance situational awareness of wind shear.*

7.4.1 Wind shear warnings shall be prepared by the aerodrome meteorological office for aerodromes where wind shear is considered a factor, in accordance with local arrangements with the appropriate ATS unit and operators concerned. Wind shear warnings shall give concise information on the observed or expected existence of wind shear which could adversely affect aircraft on the approach path or take-off path or during circling approach between runway level and 500 m (1 600 ft) above that level and aircraft on the runway during the landing roll or take-off run. Where local topography has been shown to produce significant wind shears at heights in excess of 500 m (1 600 ft) above runway level, then 500 m (1 600 ft) shall not be considered restrictive.

7.4.2 Wind shear warnings for arriving aircraft and/or departing aircraft should be cancelled when aircraft reports and/or ground-based wind shear detection equipment indicate that wind shear no longer exists.

7.4.3 At aerodromes where wind shear is detected by automated, ground-based, wind shear remote-sensing or detection equipment, wind shear alerts generated by these systems shall be issued. Wind shear alerts shall give concise, up-to-date information related to the observed existence of wind shear involving a headwind/tailwind change of 7.5 m/s (15 kt) or more which could adversely affect aircraft on the final approach path or initial take-off path and aircraft on the runway during the landing roll or take-off run.

7.4.4 Wind shear alerts should be updated at least every minute. The wind shear alert should be cancelled as soon as the headwind/tailwind change falls below 7.5 m/s (15 kt).

---

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Aeronautical Climatological Information	Chapter: 8	Page: 1

## CHAPTER 8. AERONAUTICAL CLIMATOLOGICAL INFORMATION

*Note.— Technical specifications and detailed criteria related to this chapter are given in Appendix 7.*

### 8.1 General provisions

*Note.— In cases where it is impracticable to meet the requirements for aeronautical climatological information on a national basis, the collection, processing and storage of observational data may be effected through computer facilities available for international use, and the responsibility for the preparation of the required aeronautical climatological information may be delegated as agreed between the meteorological authorities concerned.*

8.1.1 Aeronautical climatological information required for the planning of flight operations shall be prepared in the form of aerodrome climatological tables and aerodrome climatological summaries. Such information shall be supplied to aeronautical users as agreed between the designated MET service provider and the user concerned.

*Note.— Climatological data required for aerodrome planning purposes are set out in Annex - 14, Volume I, 3.1.4 and Attachment A.*

8.1.2 Aeronautical climatological information should normally be based on observations made over a period of at least five years and the period should be indicated in the information supplied.

8.1.3 Climatological data related to sites for new aerodromes and to additional runways at existing aerodromes should be collected starting as early as possible before the commissioning of those aerodromes or runways.

### 8.2 Aerodrome climatological tables

The designated MET service provider should make arrangements for collecting and retaining necessary observational data and have the capability:

- a) to prepare aerodrome climatological tables for each regular and alternate international aerodrome within its territory; and
- b) to make available such climatological tables to an aeronautical user within a time period as agreed between the designated the MET service provider and the user concerned.

### 8.3 Aerodrome climatological summaries

Aerodrome climatological summaries should follow the procedures prescribed by the World Meteorological Organization. Where computer facilities are available to store, process and retrieve the information, the summaries should be published or otherwise made available to aeronautical users on request. Where such computer facilities are not available, the summaries should be prepared using the models specified by the World Meteorological Organization and should be published and kept up to date as necessary.

### 8.4 Copies of meteorological observational data

The designated MET service provider, on request and to the extent practicable, shall make available to any other meteorological authority, to operators and to others concerned with the application of meteorology to

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Aeronautical Climatological Information	Chapter: 8	Page: 2

international air navigation, meteorological observational data required for research, investigation or operational analysis.

---

	<b>Meteorological Service</b>	BCAR - 3	
	Service for Operators and Flight Crew Members	Chapter: 9	Page: 1

## CHAPTER 9. SERVICE FOR OPERATORS AND FLIGHT CREW MEMBERS

*Note.— Technical specifications and detailed criteria related to this chapter are given in Appendix 8.*

### 9.1 General provisions

9.1.1 Meteorological information shall be supplied to operators and flight crew members for:

- a) pre-flight planning by operators;
- b) in-flight re-planning by operators using centralized operational control of flight operations;
- c) use by flight crew members before departure; and
- d) aircraft in flight.

9.1.2 Meteorological information supplied to operators and flight crew members shall cover the flight in respect of time, altitude and geographical extent. Accordingly, the information shall relate to appropriate fixed times, or periods of time, and shall extend to the aerodrome of intended landing, also covering the meteorological conditions expected between the aerodrome of intended landing and alternate aerodromes designated by the operator.

9.1.3 Meteorological information supplied to operators and flight crew members shall be up to date and include the following information, as agreed between the designated MET service provider and the operators concerned:

- a) forecasts of
  - 1) upper wind and upper-air temperature;
  - 2) upper-air humidity;
  - 3) geopotential altitude of flight levels;
  - 4) flight level and temperature of tropopause;
  - 5) direction, speed and flight level of maximum wind; and
  - 6) SIGWX phenomena; and
  - 7) cumulonimbus clouds, icing and turbulence.

*Note 1.— Forecasts of upper-air humidity and geopotential altitude of flight levels are used only in automatic flight planning and need not be displayed.*

*Note 2.— Forecasts of cumulonimbus cloud, icing and turbulence are intended to be processed and, if necessary, visualized according to the specific thresholds relevant to user operations.*

- b) METAR or SPECI (including trend forecasts as issued in accordance with regional air navigation agreement) for the aerodromes of departure and intended landing, and for take-off, en-route and destination alternate aerodromes;

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Service for Operators and Flight Crew Members	Chapter: 9	Page: 2

- c) TAF or amended TAF for the aerodromes of departure and intended landing, and for take-off, en-route and destination alternate aerodromes;
- d) forecasts for take-off;
- e) SIGMET information and appropriate special air-reports relevant to the whole route;

*Note.— Appropriate special air-reports will be those not already used in the preparation of SIGMET.*

- f) volcanic ash and tropical cyclone advisory information relevant to the whole route;
- g) as determined by local agreement and regional air navigation agreement, GAMET area forecast and/or area forecasts for low-level flights in chart form prepared in support of the issuance of AIRMET information, and AIRMET information for low-level flights relevant to the whole route;
- h) aerodrome warnings for the local aerodrome;
- i) meteorological satellite images;
- j) ground-based weather radar information; and
- k) space weather advisory information relevant to the whole route.

9.1.4 Forecasts listed under 9.1.3 a) shall be generated from the digital forecasts provided by the WAFCs whenever these forecasts cover the intended flight path in respect of time, altitude and geographical extent, unless otherwise agreed between the designated MET service provider and the operator concerned.

9.1.5 When forecasts are identified as being originated by the WAFCs, no modifications shall be made to their meteorological content.

9.1.6 Charts generated from the digital forecasts provided by the WAFCs shall be made available, as required by operators, for fixed areas of coverage as shown in Appendix 8, Figures A8 -1, A8-2 and A8 -3.

9.1.7 When forecasts of upper wind and upper-air temperature listed under 9.1.3 a) 1) are supplied in chart form, they shall be fixed time prognostic charts for flight levels as specified in BCAR-3, Appendix 2, 1.2.2 a). When forecasts of SIGWX phenomena listed under 9.1.3 a) 6) are supplied in chart form, they shall be fixed time prognostic charts for an atmospheric layer limited by flight levels as specified in BCAR-3, Appendix 2, 1.3.2 and Appendix 5, 4.3.2.

9.1.8 The forecasts of upper wind and upper-air temperature and of SIGWX phenomena above flight level 100 requested for pre-flight planning and in-flight re-planning by the operator shall be supplied as soon as they become available, but not later than 3 hours before departure. Other meteorological information requested for pre-flight planning and in-flight re-planning by the operator shall be supplied as soon as is practicable.

9.1.9 When necessary, the designated MET service provider responsible for providing MET services for operators and flight crew members, shall initiate coordinating action with the meteorological authorities of other States with a view to obtaining from them the reports and/or forecasts required.

9.1.10 Meteorological information shall be supplied to operators and flight crew members at the location as determined by the MET service provider, after consultation with the operators concerned and at the time

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Service for Operators and Flight Crew Members	Chapter: 9	Page: 3

between the aerodrome meteorological office and the operator concerned. The service for pre-flight planning shall be confined to flights originating within the territory of Bhutan. At an aerodrome without an aerodrome meteorological office at the aerodrome, arrangements for the supply of meteorological information shall be as agreed between the MET service provider and the operator concerned.

## 9.2 Briefing, consultation and display

*Note.— The requirements for the use of automated pre-flight information systems in providing briefing, consultation and display are given in 9.4.*

9.2.1 Briefing and/or consultation shall be provided, on request, to flight crew members and/or other flight operations personnel. Its purpose shall be to supply the latest available information on existing and expected meteorological conditions along the route to be flown, at the aerodrome of intended landing, alternate aerodromes and other aerodromes as relevant, either to explain and amplify the information contained in the flight documentation, or as agreed between the designated MET service provider and the operator concerned, in lieu of flight documentation.

9.2.2 Meteorological information used for briefing, consultation and display shall include any or all of the information listed in 9.1.3.

9.2.3 If the meteorological office expresses an opinion on the development of the meteorological conditions at an aerodrome which differs appreciably from the aerodrome forecast included in the flight documentation, the attention of flight crew members shall be drawn to the divergence. The portion of the briefing dealing with the divergence shall be recorded at the time of briefing and this record shall be made available to the operator.

9.2.4 The required briefing, consultation, display and/or flight documentation shall normally be provided by the meteorological office associated with the aerodrome of departure. At an aerodrome where these services are not available, arrangements to meet the requirements of flight crew members shall be as agreed between the designated MET service provider and the operator concerned. In exceptional circumstances, such as an undue delay, the meteorological office associated with the aerodrome shall provide or, if that is not practicable, arrange for the provision of a new briefing, consultation and/or flight documentation as necessary.

9.2.5 The flight crew member or other flight operations personnel for whom briefing, consultation and/or flight documentation has been requested should visit the meteorological office at the time agreed between the meteorological office and the operator concerned. Where local circumstances at an aerodrome make personal briefing or consultation impracticable, the meteorological office should provide those services by telephone or other suitable telecommunications facilities.

## 9.3 Flight documentation

*Note.— The requirements for the use of automated pre-flight information systems in providing flight documentation are given in 9.4.*

9.3.1 Flight documentation to be made available shall comprise information listed under 9.1.3 a) 1) and 6), b), c), e) f) and, if appropriate, g) and k). However, flight documentation for flights of two hours' duration or less, after a short stop or turnaround, shall be limited to the information operationally needed, as agreed between the MET service provider and the operator concerned, but in all cases the flight documentation shall at least comprise information on 9.1.3 b), c), e) f) and, if appropriate, g) and k).

9.3.2 Whenever it becomes apparent that the meteorological information to be included in the flight documentation will differ materially from that made available for pre-flight planning and in-flight re-planning, the operator shall be advised immediately and, if practicable, be supplied with the revised information as agreed between the operator and the aerodrome meteorological office concerned.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Service for Operators and Flight Crew Members	Chapter: 9	Page: 4

9.3.3 In cases where a need for amendment arises after the flight documentation has been supplied, and before take-off of the aircraft, the meteorological office should, as agreed locally, issue the necessary amendment or updated information to the operator or to the local air traffic services unit, for transmission to the aircraft.

9.3.4 The designated MET service provider shall retain information supplied to flight crew members, either as printed copies or in computer files, for a period of at least 30 days from the date of issue. This information shall be made available, on request, for inquiries or investigations and, for these purposes, shall be retained until the inquiry or investigation is completed.

#### **9.4 Automated pre-flight information systems for briefing, consultation, flight planning and flight documentation**

9.4.1 Where the designated MET service provider uses automated pre-flight information systems to supply and display meteorological information to operators and flight crew members for self-briefing, flight planning and flight documentation purposes, the information supplied and displayed shall comply with the relevant provisions in 9.1 to 9.3 inclusive.

9.4.2 Automated pre-flight information systems providing for a harmonized, common point of access to meteorological information and aeronautical information services information by operators, flight crew members and other aeronautical personnel concerned should be as agreed between the designated MET service provider and the BCAA or the agency to which the authority to provide service has been delegated in accordance with BCAR-15, 2.1.1 c)

*Note.— The meteorological and aeronautical information services information concerned is specified in 9.1 to 9.3 and Appendix 8 and PANS-AIM, 5.5, respectively.*

9.4.3 Where automated pre-flight information systems are used to provide for a harmonized, common point of access to meteorological information and aeronautical information services information by operators, flight crew members and other aeronautical personnel concerned, the designated MET service provider shall remain responsible for the quality control and quality management of meteorological information provided by means of such systems in accordance with Chapter 2, 2.2.2.

*Note.— The responsibilities relating to aeronautical information services information and the quality assurance of the information are given in BCAR - 15, Chapters 1, 2 and 3.*

#### **9.5 Information for aircraft in flight**

9.5.1 Meteorological information for use by aircraft in flight shall be supplied by an aerodrome meteorological office to its associated air traffic services unit through appropriate arrangement and procedures. Meteorological information for planning by the operator for aircraft in flight shall be supplied on request, as agreed between the designated MET service provider and the operator concerned.

9.5.2 Meteorological information for use by aircraft in flight shall be supplied to air traffic services units in accordance with the specifications of Chapter 10.

9.5.3 Meteorological information shall be supplied in accordance with the specifications of Chapter 11.

---

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Information for ATS, SAR & AIS	Chapter: 10	Page: 1

## **CHAPTER 10. INFORMATION FOR AIR TRAFFIC SERVICES, SEARCH AND RESCUE SERVICES AND AERONAUTICAL INFORMATION SERVICES**

*Note – Technical specifications and detailed criteria related to this chapter are given in Appendix 9.*

### **10.1 Information for air traffic services units**

10.1.1 The designated MET service provider shall designate an aerodrome meteorological office to be associated with each air traffic services unit. The associated aerodrome meteorological office shall, after coordination with the air traffic services unit, supply, or arrange for the supply of, up-to-date meteorological information to the unit as necessary for the conduct of its functions.

10.1.2 An aerodrome meteorological office should be associated with an aerodrome control tower or approach control unit for the provision of meteorological information.

10.1.3 A meteorological watch office shall be associated with a flight information centre or an area control centre for the provision of meteorological information.

10.1.4 Where, owing to local circumstances, it is convenient for the duties of an associated aerodrome meteorological office or meteorological watch office to be shared between two or more aerodrome meteorological offices or meteorological watch offices, the division of responsibility should be determined by the MET service provider in consultation with the appropriate ATS authority.

10.1.5 Any meteorological information requested by an air traffic services unit in connection with an aircraft emergency shall be supplied as rapidly as possible.

### **10.2 Information for search and rescue services units**

Aerodrome meteorological offices or meteorological watch offices designated by the MET service provider in accordance with regional air navigation agreement shall supply search and rescue services units with the meteorological information they require in a form established by mutual agreement. For that purpose, the designated aerodrome meteorological office shall maintain liaison with the search and rescue services unit throughout a search and rescue operation.

### **10.3 Information for aeronautical information services units**

The MET service provider shall supply up-to-date meteorological information to relevant aeronautical information services units, as necessary, for the conduct of their functions.

---

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Requirements for and Use of Communications	Chapter: 11	Page: 1

## CHAPTER 11. REQUIREMENTS FOR AND USE OF COMMUNICATIONS

*Note 1.— Technical specifications and detailed criteria related to this chapter are given in Appendix 10.*

### 11.1 Requirements for communications

11.1.1 Suitable telecommunications facilities shall be made available to permit aerodrome meteorological offices and, as necessary, aeronautical meteorological stations to supply the required meteorological information to air traffic services units on the aerodromes for which those offices and stations are responsible, and in particular to aerodrome control towers, approach control units and the aeronautical telecommunications stations serving these aerodromes.

11.1.2 Suitable telecommunications facilities shall be made available to permit meteorological watch offices to supply the required meteorological information to air traffic services and search and rescue services units in respect of the flight information regions, control areas and search and rescue regions for which those offices are responsible, and in particular to flight information centre, area control centres and rescue coordination centres and the associated aeronautical telecommunications stations.

11.1.3 Suitable telecommunications facilities shall be made available to permit world area forecast centres to supply the required world area forecast system products to meteorological offices, meteorological authorities and other users.

11.1.4 Telecommunications facilities between aerodrome meteorological offices and, as necessary, aeronautical meteorological stations and aerodrome control towers or approach control units shall permit communications by direct speech, the speed with which the communications can be established being such that the required points may normally be contacted within approximately 15 seconds.

11.1.5 Telecommunications facilities between aerodrome meteorological offices and flight information centres, area control centres, rescue coordination centres and aeronautical telecommunications stations should permit:

- a) communications by direct speech, the speed with which the communications can be established being such that the required points may normally be contacted within approximately 15 seconds; and
- b) printed communications, when a record is required by the recipients; the message transit time should not exceed 5 minutes.

*Note.— In 11.1.4 and 11.1.5, “approximately 15 seconds” refers to telephony communications involving switchboard operation and “5 minutes” refers to printed communications involving retransmission.*

11.1.6 The telecommunications facilities required in accordance with 11.1.4 and 11.1.5 should be supplemented, as and where necessary, by other forms of visual or audio communications, for example, closed-circuit television or separate information processing systems.

11.1.7 As agreed between the designated MET service provider and the operators concerned, provision should be made to enable operators to establish suitable telecommunications facilities for obtaining meteorological information from aerodrome meteorological offices or other appropriate sources.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Requirements for and Use of Communications	Chapter: 11	Page: 2

11.1.8 Suitable telecommunications facilities shall be made available to permit meteorological offices to exchange operational meteorological information with other meteorological offices.

11.1.9 The telecommunications facilities used for the exchange of operational meteorological information should be the aeronautical fixed service or, for the exchange of non-time critical operational meteorological information, the public Internet, subject to availability, satisfactory operation and bilateral/multilateral and/or regional air navigation agreements.

*Note 1.— Aeronautical fixed service Internet-based services, operated by the World Area Forecast Centres, providing for global coverage are used to support the global exchanges of operational meteorological information.*

*Note 2.— Guidance material on non-time-critical operational meteorological information and relevant aspects of the public Internet is provided in the Guidelines on the Use of the Public Internet for Aeronautical Applications (ICAO Doc 9855).*

### **11.2 Use of aeronautical fixed service communications and the public Internet— meteorological bulletins**

Meteorological bulletins containing operational meteorological information to be transmitted via the aeronautical fixed service or the public internet shall be originated by the appropriate meteorological office or aeronautical meteorological station.

*Note.— Meteorological bulletins containing operational meteorological information authorized for transmission via the aeronautical fixed service are listed in BCAR - 10, Volume II, Chapter 4, together with the relevant priorities and priority indicators.*

### **11.3 Use of aeronautical fixed service communications-world area forecast system products**

World area forecast system products in digital form should be transmitted using binary data communications techniques. The method and channels used for the dissemination of the products should be as determined by regional air navigation agreement.

### **11.4 Use of aeronautical mobile service communication**

The content and format of meteorological information transmitted to aircraft and by aircraft shall be consistent with the provisions of this document.

### **11.5 Use of aeronautical data link service-contents of D-VOLMET**

D-VOLMET shall contain current METAR and SPECI, together with trend forecasts where available, TAF and SIGMET, special air-reports not covered by a SIGMET and, where available, AIRMET.

*Note.— The requirement to provide METAR and SPECI may be met by the data link-flight information service (D-FIS) application entitled “Data link-aerodrome routine meteorological report (D-METAR) service”; the requirement to provide TAF may be met by the D-FIS application entitled “Data link-aerodrome forecast (D-TAF) service”; and the requirement to provide SIGMET and AIRMET messages may be met by the D-FIS application entitled “Data link-SIGMET (D-SIGMET) service”. The details of these data link services are specified in the Manual of Air Traffic Services Data Link Applications (ICAO Doc 9694).*

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Requirements for and Use of Communications	Chapter: 11	Page: 3

### **11.6 Use of aeronautical broadcasting service-contents of VOLMET broadcasts**

11.6.1 Continuous VOLMET broadcasts, normally on very high frequencies (VHF), shall contain current METAR and SPECI, together with trend forecasts where available.

11.6.2 Scheduled VOLMET broadcasts, normally on high frequencies (HF), shall contain current METAR and SPECI, together with trend forecasts where available and, where so determined by regional air navigation agreement, TAF and SIGMET.

---

	<b>Meteorological Service</b>		BCAR – 3	
	Flight Documentation-Model Charts and Forms		APP 1	Page: 1

## APPENDIX 1. FLIGHT DOCUMENTATION – MODEL CHARTS AND FORMS

*(See Chapter 9 of this Document.)*

MODEL A	OPMET information
MODEL IS	Upper wind and upper-air temperature chart for standard isobaric surface Example 1. Arrows, feathers and pennants (Mercator projection) Example 2. Arrows, feathers and pennants (Polar stereographic projection)
MODEL SWH	Significant weather chart (high level) Example. Polar stereographic projection (showing the jet stream vertical extent)
MODEL SWM	Significant weather chart (medium level)
MODEL SWL	Significant weather chart (low level) Example 1 Example 2
MODEL TCG	Tropical cyclone advisory information in graphical format
MODEL VAG	Volcanic ash advisory information in graphical format  Example 1. Mercator projection Example 2. Polar stereographic projection
MODEL STC	SIGMET for tropical cyclone in graphical format
MODEL SVA	SIGMET for volcanic ash in graphical format
MODEL SGE	SIGMET for phenomena other than tropical cyclone and volcanic ash in graphical format  Example 1. Mercator projection Example 2. Polar stereographic projection
MODEL SN	Sheet of notations used in flight documentation

OPMET INFORMATION


MODEL A

ISSUED BY ..... METEOROLOGICAL OFFICE (DATE, TIME UTC) .....																																						
<p><b>INTENSITY</b>          “ - ” (light); no indicator (moderate); “ + ” (heavy, or a tornado/waterspout in the case of funnel cloud(s)) are used to indicate the intensity of certain phenomena</p> <p><b>DESCRIPTORS</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">MI – shallow</td> <td style="width: 25%;">PR – partial</td> <td style="width: 25%;">BL – blowing</td> <td style="width: 25%;">TS – thunderstorm</td> </tr> <tr> <td>BC – patches</td> <td>DR – low drifting</td> <td>SH – shower(s)</td> <td>FZ – freezing (supercooled)</td> </tr> </table> <p><b>PRESENT WEATHER ABBREVIATIONS</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 33%;">DZ – drizzle</td> <td style="width: 33%;">BR – mist</td> <td style="width: 33%;">PO – dust/sand whirls (dust devils)</td> </tr> <tr> <td>RA – rain</td> <td>FG – fog</td> <td>SQ – squall</td> </tr> <tr> <td>SN – snow</td> <td>FU – smoke</td> <td>FC – funnel cloud(s) (tornado or waterspout)</td> </tr> <tr> <td>SG – snow grains</td> <td>VA – volcanic ash</td> <td></td> </tr> <tr> <td>PL – ice pellets</td> <td>DU – widespread dust</td> <td>SS – sandstorm</td> </tr> <tr> <td>GR – hail</td> <td>SA – sand</td> <td>DS – duststorm</td> </tr> <tr> <td>GS – small hail and/or snow pellets</td> <td>HZ – haze</td> <td></td> </tr> </table> <p><b>EXAMPLES</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">+SHRA – heavy shower of rain</td> <td style="width: 50%;">TSSN – thunderstorm with moderate snow</td> </tr> <tr> <td>FZDZ – moderate freezing drizzle</td> <td>SNRA – moderate snow and rain</td> </tr> <tr> <td>+TSSNGR – thunderstorm with heavy snow and hail</td> <td></td> </tr> </table>				MI – shallow	PR – partial	BL – blowing	TS – thunderstorm	BC – patches	DR – low drifting	SH – shower(s)	FZ – freezing (supercooled)	DZ – drizzle	BR – mist	PO – dust/sand whirls (dust devils)	RA – rain	FG – fog	SQ – squall	SN – snow	FU – smoke	FC – funnel cloud(s) (tornado or waterspout)	SG – snow grains	VA – volcanic ash		PL – ice pellets	DU – widespread dust	SS – sandstorm	GR – hail	SA – sand	DS – duststorm	GS – small hail and/or snow pellets	HZ – haze		+SHRA – heavy shower of rain	TSSN – thunderstorm with moderate snow	FZDZ – moderate freezing drizzle	SNRA – moderate snow and rain	+TSSNGR – thunderstorm with heavy snow and hail	
MI – shallow	PR – partial	BL – blowing	TS – thunderstorm																																			
BC – patches	DR – low drifting	SH – shower(s)	FZ – freezing (supercooled)																																			
DZ – drizzle	BR – mist	PO – dust/sand whirls (dust devils)																																				
RA – rain	FG – fog	SQ – squall																																				
SN – snow	FU – smoke	FC – funnel cloud(s) (tornado or waterspout)																																				
SG – snow grains	VA – volcanic ash																																					
PL – ice pellets	DU – widespread dust	SS – sandstorm																																				
GR – hail	SA – sand	DS – duststorm																																				
GS – small hail and/or snow pellets	HZ – haze																																					
+SHRA – heavy shower of rain	TSSN – thunderstorm with moderate snow																																					
FZDZ – moderate freezing drizzle	SNRA – moderate snow and rain																																					
+TSSNGR – thunderstorm with heavy snow and hail																																						
<p><b>SELECTED ICAO LOCATION INDICATORS</b></p> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%;">CYUL Montreal Pierre Elliot Trudeau/Intl</td> <td style="width: 25%;">HECA Cairo/Intl</td> <td style="width: 25%;">OBBI Bahrain Intl</td> </tr> <tr> <td>EDDF Frankfurt/Main</td> <td>HKJK Nairobi/Jomo Kenyatta</td> <td>RJTT Tokyo Intl</td> </tr> <tr> <td>EGLL London/Heathrow</td> <td>KJFK New York/John F. Kennedy Intl</td> <td>SBGL Rio de Janeiro/Galeão Intl</td> </tr> <tr> <td>GMMC Casablanca/Anfa</td> <td>LFPG Paris/Charles de Gaulle</td> <td>YSSY Sydney/Kingsford Smith Intl</td> </tr> <tr> <td></td> <td>NZAA Auckland Intl</td> <td>ZBAA Beijing/Capital</td> </tr> </table>				CYUL Montreal Pierre Elliot Trudeau/Intl	HECA Cairo/Intl	OBBI Bahrain Intl	EDDF Frankfurt/Main	HKJK Nairobi/Jomo Kenyatta	RJTT Tokyo Intl	EGLL London/Heathrow	KJFK New York/John F. Kennedy Intl	SBGL Rio de Janeiro/Galeão Intl	GMMC Casablanca/Anfa	LFPG Paris/Charles de Gaulle	YSSY Sydney/Kingsford Smith Intl		NZAA Auckland Intl	ZBAA Beijing/Capital																				
CYUL Montreal Pierre Elliot Trudeau/Intl	HECA Cairo/Intl	OBBI Bahrain Intl																																				
EDDF Frankfurt/Main	HKJK Nairobi/Jomo Kenyatta	RJTT Tokyo Intl																																				
EGLL London/Heathrow	KJFK New York/John F. Kennedy Intl	SBGL Rio de Janeiro/Galeão Intl																																				
GMMC Casablanca/Anfa	LFPG Paris/Charles de Gaulle	YSSY Sydney/Kingsford Smith Intl																																				
	NZAA Auckland Intl	ZBAA Beijing/Capital																																				
<p>METAR CYUL 240700Z 27018G30KT 5000 SN FEW020 BKN045 M02/M07 Q0995=</p> <p>METAR EDDF 240950Z 05015KT 9999 FEW025 04/M05 Q1018 NOSIG=</p> <p>METAR LFPG 241000Z 07010KT 5000 SCT010 BKN040 02/M01 Q1014 NOSIG=</p> <p>SPECI GMMC 220530Z 24006KT 5000 –TSGR BKN016TCU FEW020CB SCT026 08/07 Q1013=</p> <p>TAF AMD NZAA 240855Z 2409/2506 24010KT 9999 FEW030 BECMG 2411/2413 VRB02KT 2000 HZ FM 242200 24010KT CAVOK=</p> <p>TAF ZBAA 240440Z 2406/2506 13004MPS 6000 NSC BECMG 2415/2416 2000 SN OVC040 TEMPO 2418/24211000 SN BECMG 2500/2501 32004MPS 3500 BR NSC BECMG 2503/2504 32010G20MPS CAVOK=</p> <p>TAF YSSY 240443Z 2406/2506 05015KT 3000 BR SCT030 BECMG 2414/2416 33008KT FM 2422 04020KT CAVOK=</p> <p>HECC SIGMET 2 VALID 240900/241200 HECA-</p> <p>HECC CAIRO FIR SEV TURB OBS N OF N27 FL 390/440 MOV E 25KMH NC.</p>																																						



UPPER WIND AND TEMPERATURE CHART FOR STANDARD ISOBARIC SURFACE  
Example 1. Arrows, feathers and pennants (Mercator projection)


MODEL IS

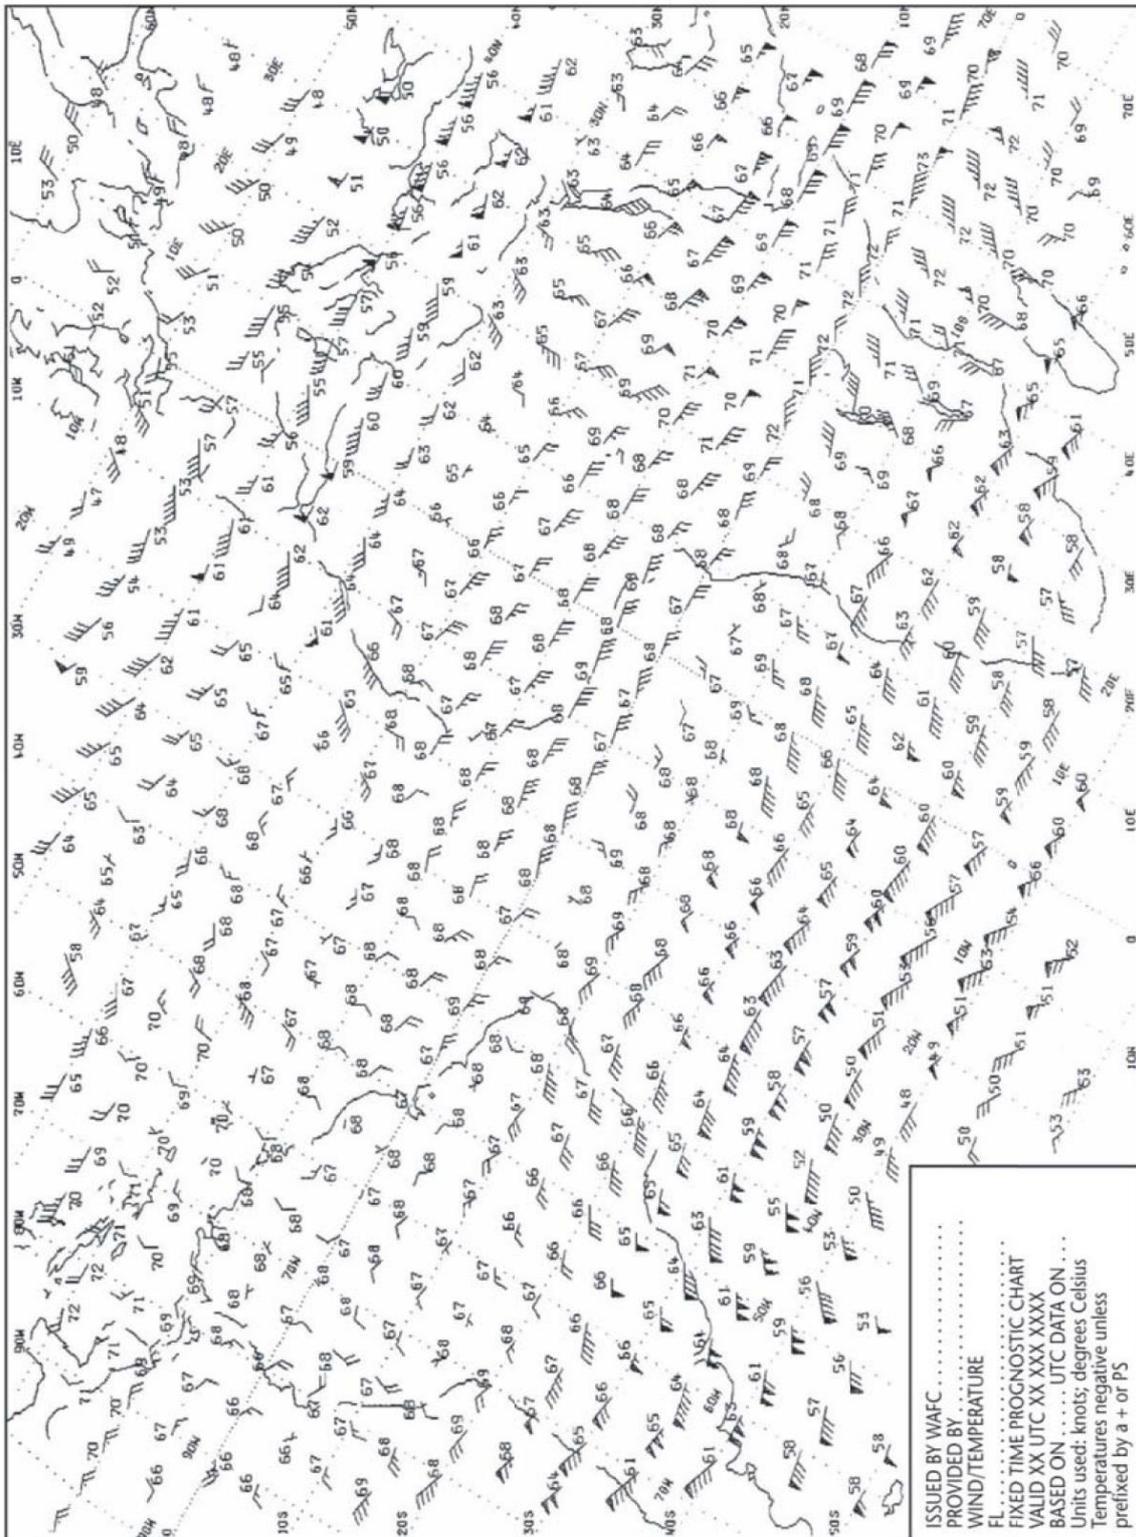



UPPER WIND AND TEMPERATURE CHART FOR STANDARD ISOBARIC SURFACE  
Example 2. Arrows, feathers and pennants (Polar stereo graphic projection)

MODEL IS

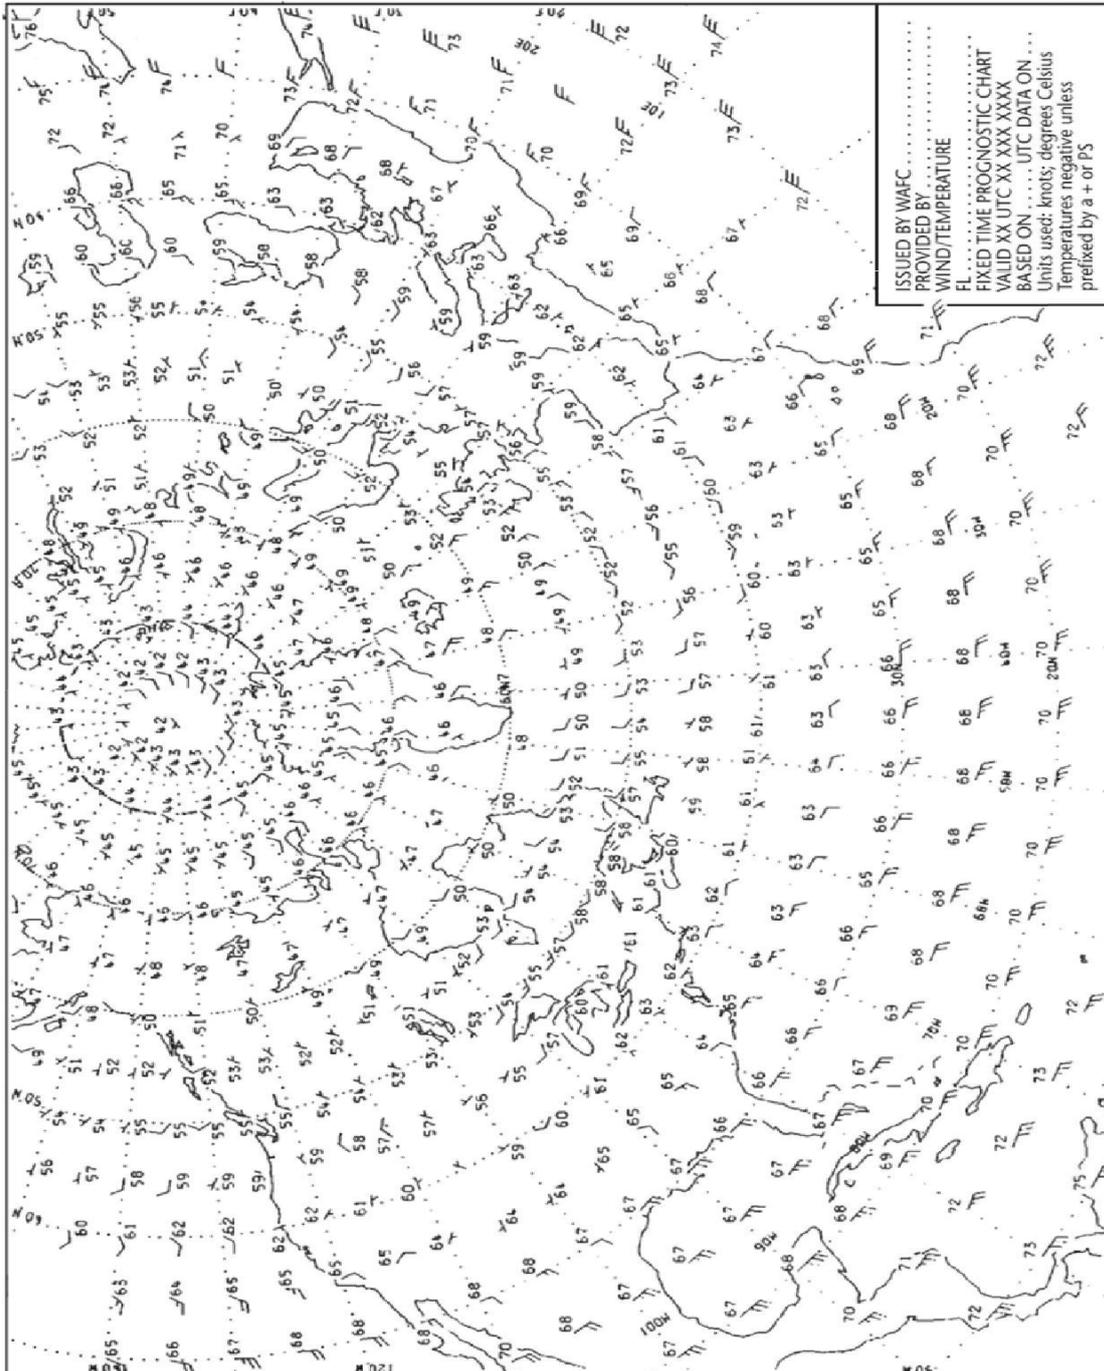




SIGNIFICANT WEATHER CHART (HIGH LEVEL)

MODEL SWH


Example — Polar stereographic projection (showing the jet stream vertical extend)

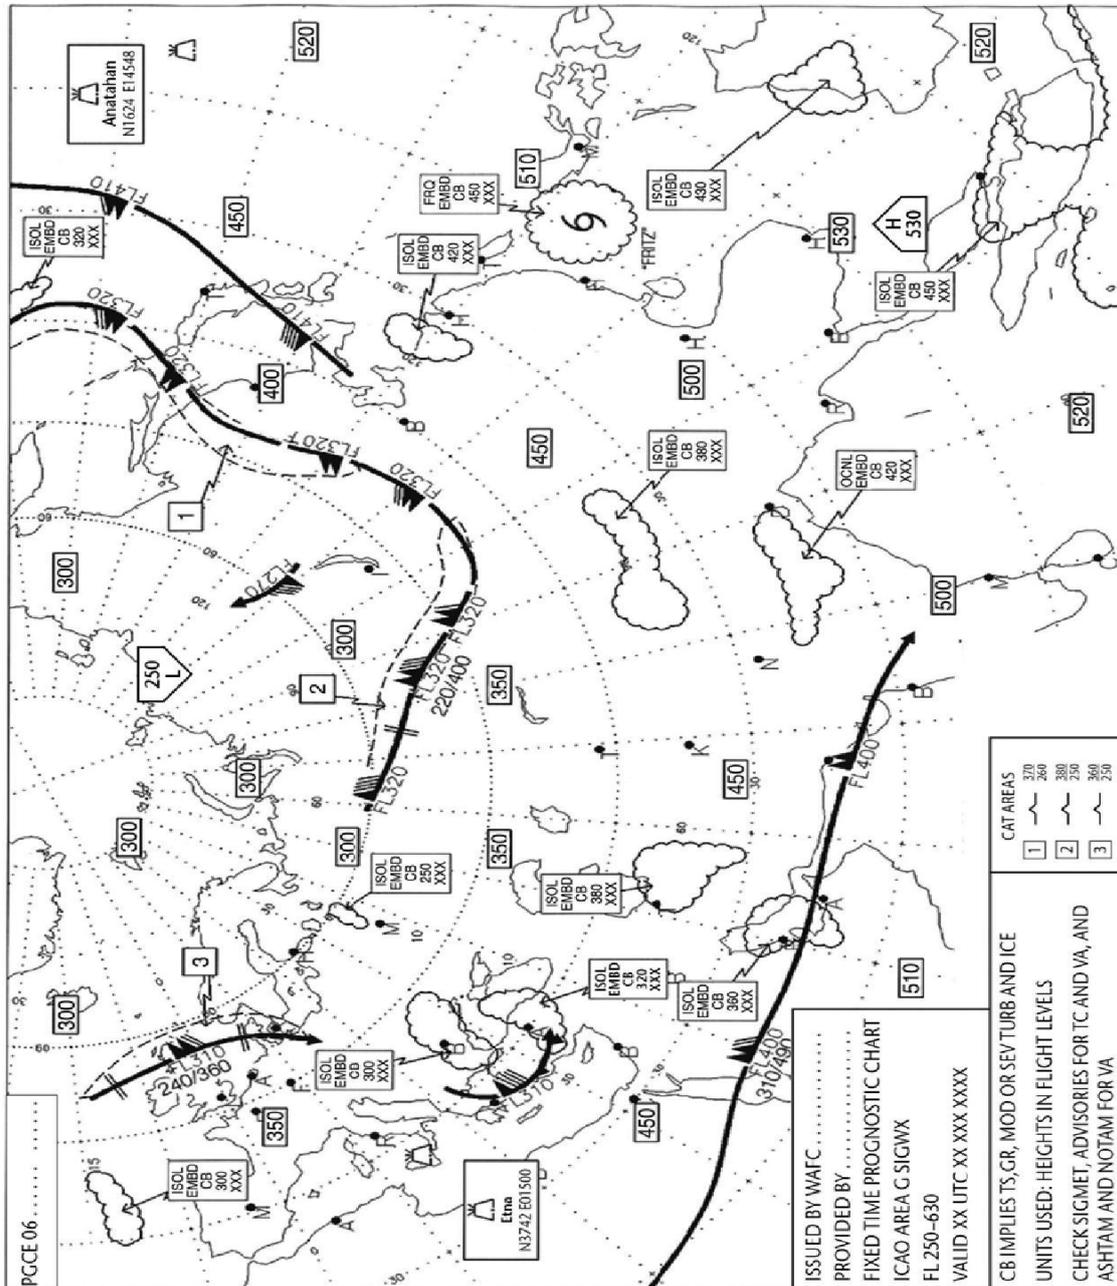



SIGNIFICANT WEATHER CHART (MEDIUM LEVEL)


MODEL SWM

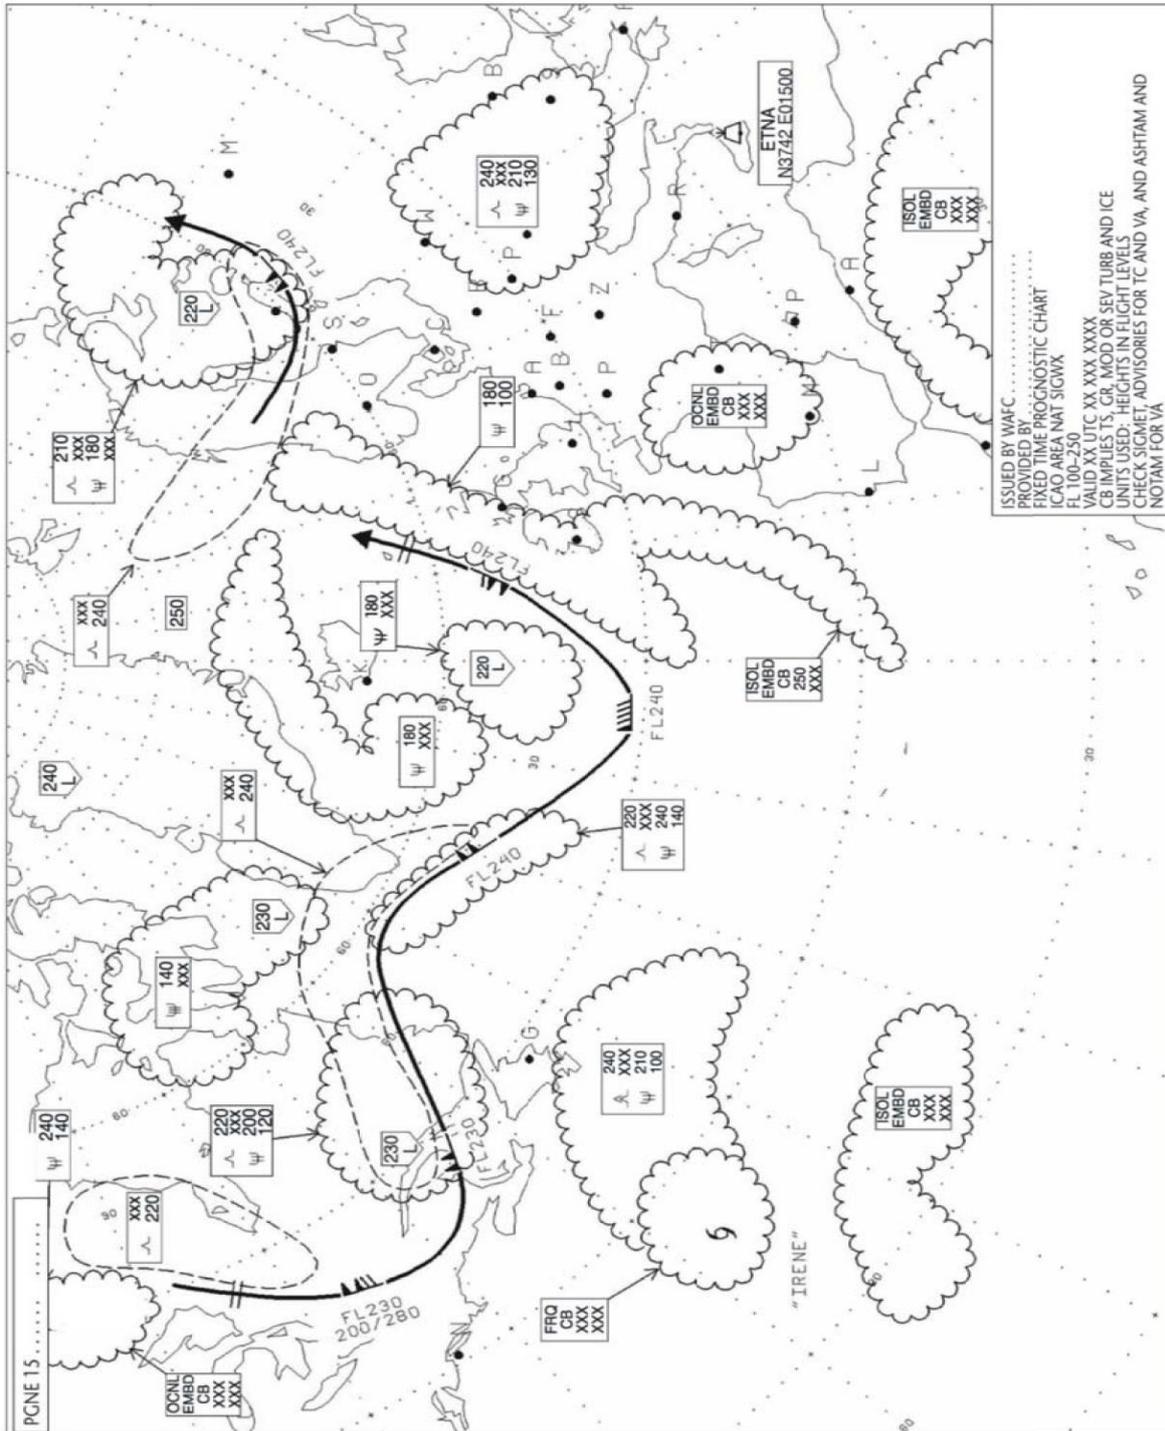



SIGNIFICANT WEATHER CHART (LOW LEVEL)  
Example 1

MODEL SWL

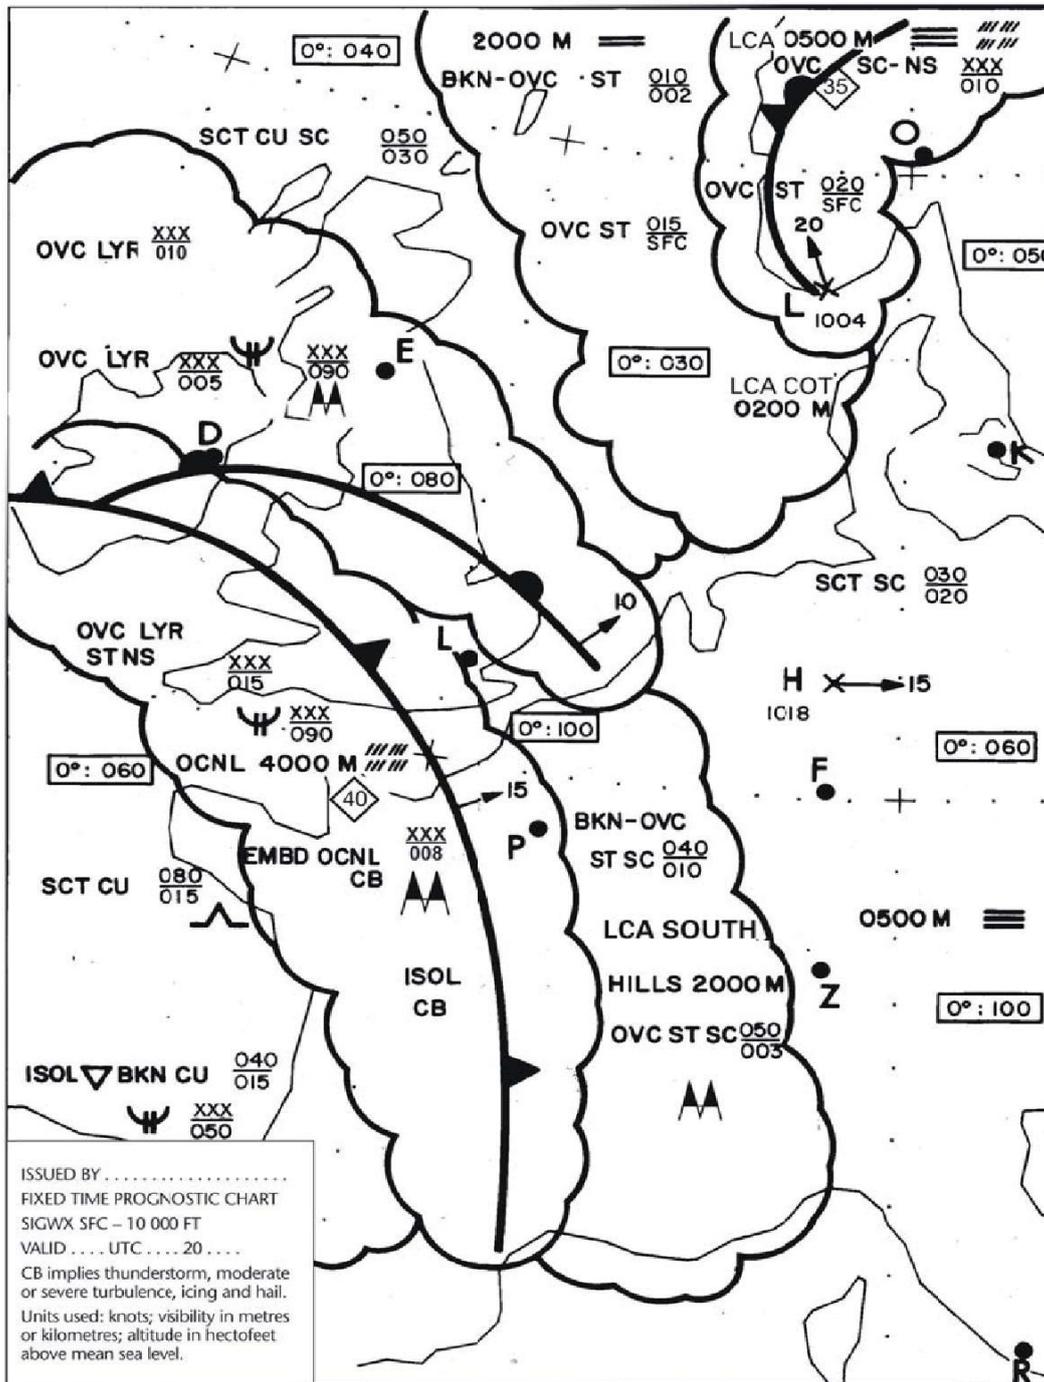



SIGNIFICANT WEATHER CHART (LOW LEVEL)  
Example 2


MODEL SWL

FIXED TIME PROGNOSTIC CHART		VALID	UTC	BASED ON	UTC DATA ON	0°C
	VARIANT					
	AREA A				— SCT CU 025/080	50
	ISOL				— BKN CU 015/XXX $\Psi$ 050/XXX	
	AREA B				— OVC LVR ST NS 015/XXX $\Psi$ 050/XXX	50
	OCNL	4000	HEAVY RAIN		EMBD CB 008/XXX $\mathbb{M}$	
	ISOL	1000	THUNDERSTORM			
	AREA C				BKN to OVC ST SC 010/040	100
	LCA SOUTH COT HILLS	2000	DRIZZLE		OVC ST SC 003/050 $\mathbb{M}$	
	AREA D				OVC LVR SC NS 010/XXX	90
	LCA NORTH	4500	RAIN		OVC LVR ST NS 005/XXX $\Psi$ 090/XXX $\mathbb{M}$	
AREA E				SCT SC 020/030	40	
LCA LAND	0500	FOG				
AREA F	2000	MIST		BKN to OVC ST 002/010	30	
LCA COT HILLS	0200	FOG		OVC ST SFC/015		
AREA G	4500	RAIN		— OVC CU SC NS 010/XXX $\Psi$ 030/XXX	30	
LCA NORTH	0500	FOG		OVC ST SFC/010		
AREA J				SCT CU SC 030/050	40	
LCA HILLS NORTH				— BLW 070		
SIGWX SFC – 10 000 FT ISSUED BY ..... AT ..... UTC Notes: 1. Pressure in hPa and speeds in knots. 2. Vis in m included if less than 5 000 m. $\mathbb{M}$ implies vis 200 m or less. 3. Altitude in feet/feet above MSL. XXX = above 10 000 ft. 4. CB implies MOD/SEV icing, turbulence and thunderstorm. 5. Only significant weather and/or weather phenomena causing visibility reduction below 5 000 m included.		<b>REMARKS:</b> EAST TO NE GALES SHETLAND TO HEBRIDES - SEVERE MOUNTAIN WAVES NW SCOTLAND – FOG PATCHES EAST ANGLIA – WDSRPR FOG OVER NORTH FRANCE, BELGIUM AND THE NETHERLANDS				



TROPICAL CYCLONE ADVISORY INFORMATION IN GRAPHICAL FORMAT




MODEL TCG

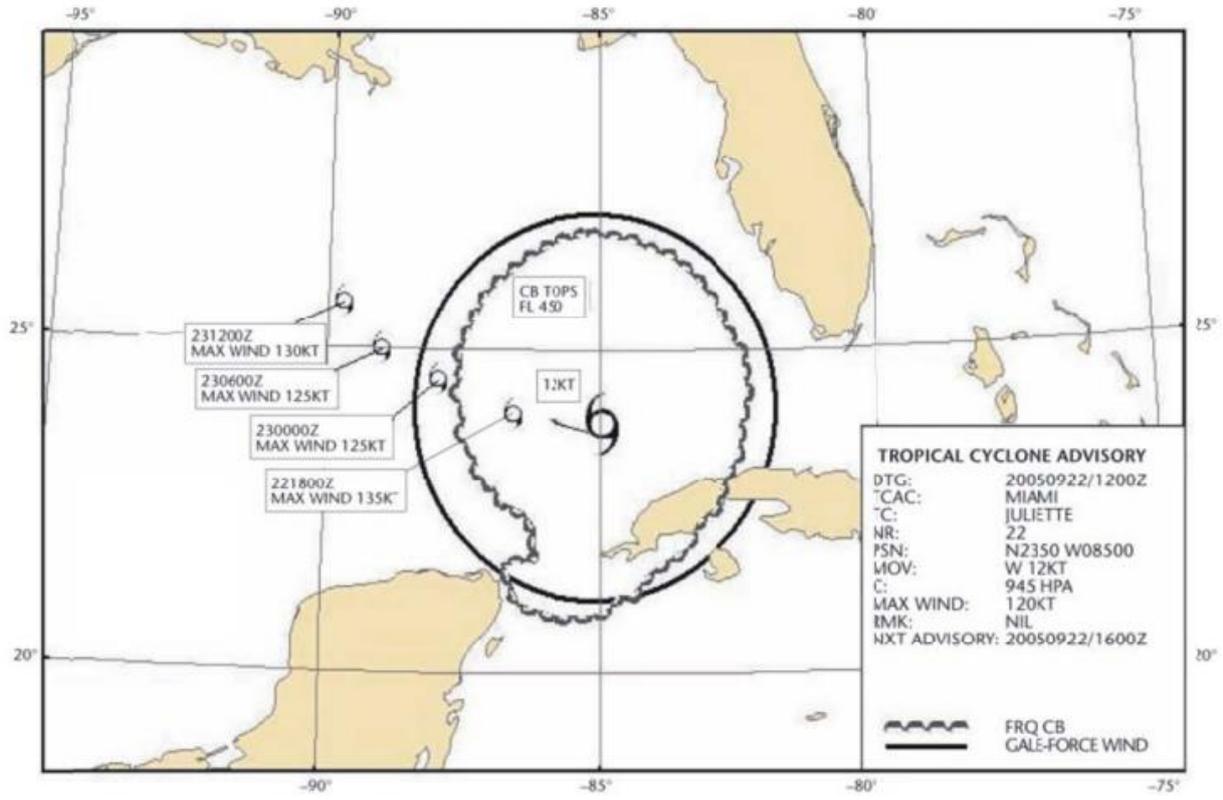



VOLCANIC ASH ADVISORY INFORMATION IN GRAPHICAL FORMAT

MODEL VAG

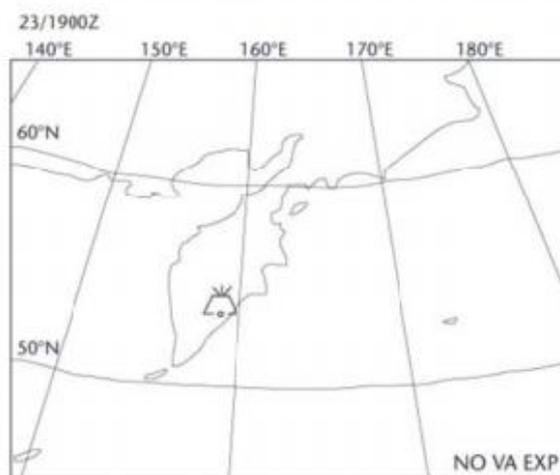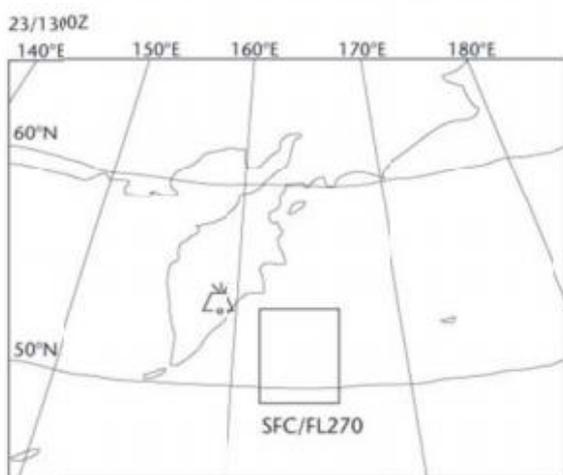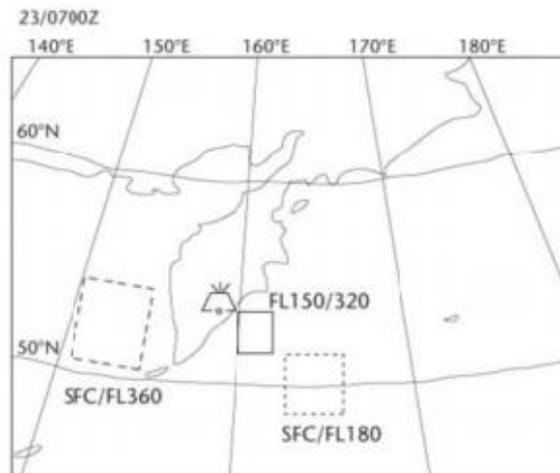

**VOLCANIC ASH ADVISORY**

DTG: 20080923/0130Z

VAAC TOKYO

VOLCANO: KARYMSKY 1000-13

AREA: RUSSIAN FEDERATION

SUMMIT ELEV: 1536M

ADVISORY NR: 2008/4

INFO SOURCE: MTSAT-IR, KVERT KEMSC

AVIATION COLOUR CODE: RED

ERUPTION DETAILS: ERUPTED AT 20080523/0000Z FL300 REPORTED

RMK: LATEST REP FM K/ERT (0120Z) INDICATES ERUPTION HAS CEASED


TWO DISPERSING VA CLD ARE EVIDENT ON SATELLITE IMAGERY

NXT ADVISORY: 20080923/0730Z




SIGMET FOR TROPICAL CYCLONE IN GRAPHICAL FORMAT

MODEL STC

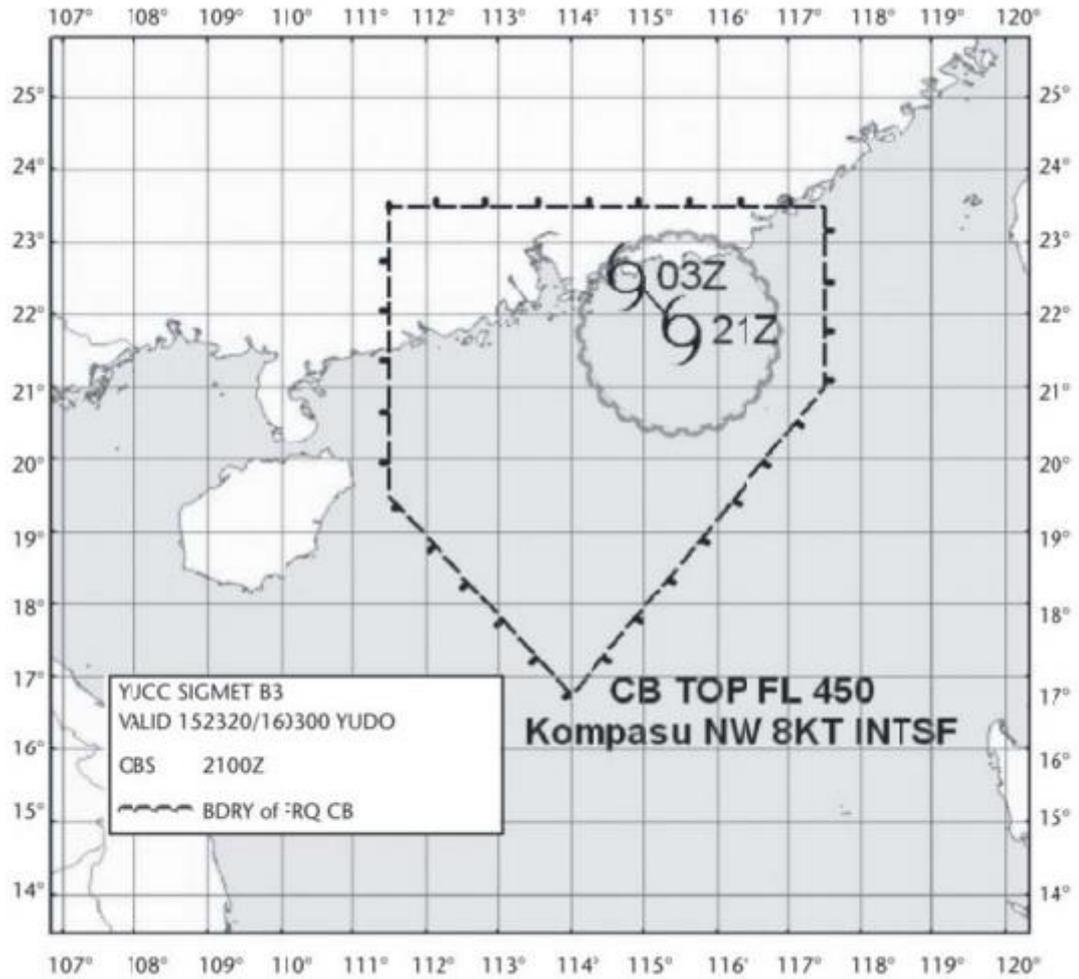

SIGMET FOR VOLCANIC ASH IN GRAPHICAL FORMAT


MODEL SVA

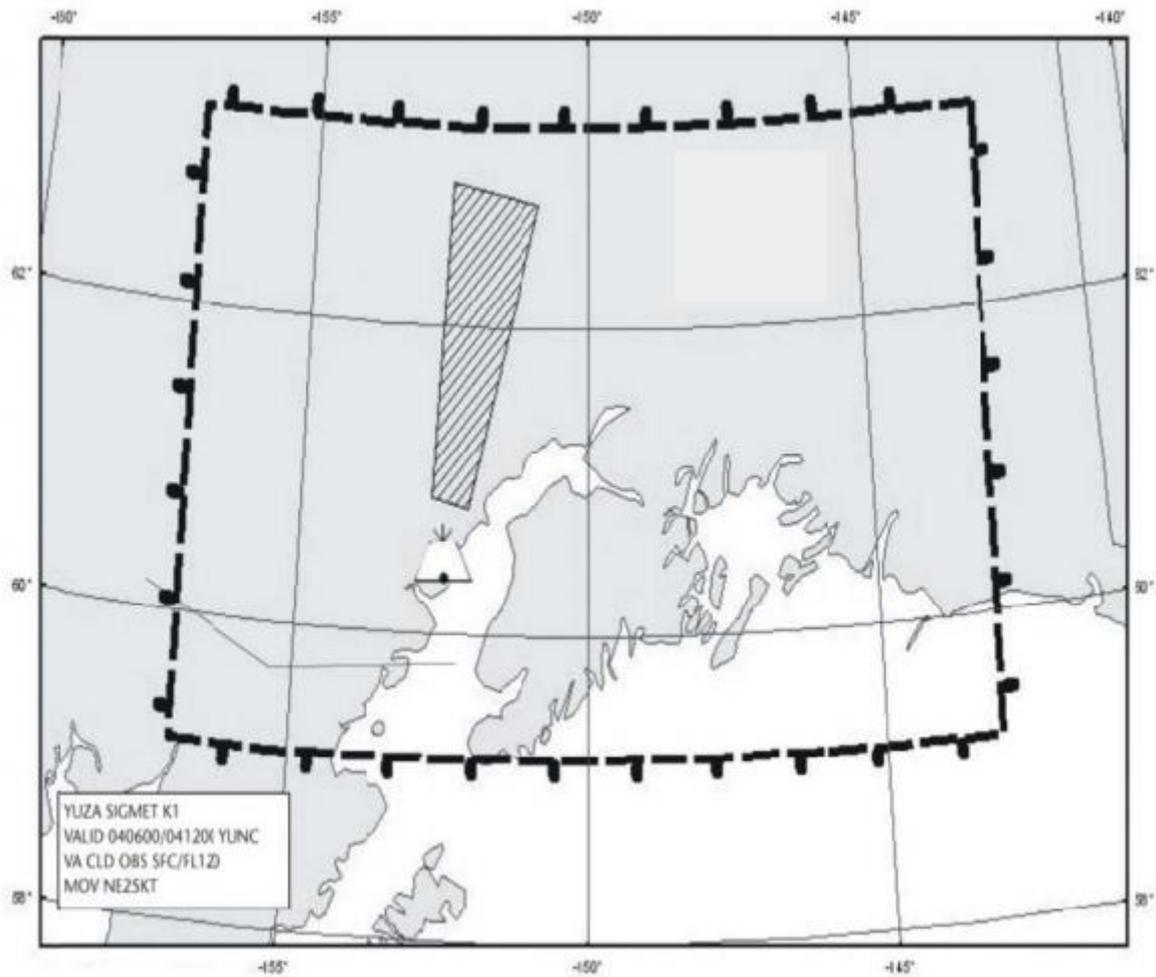

 Fictitious FIR.

SIGMET FOR PHENOMENA OTHER THAN TROPICAL CYCLONE AND VOLCANIC ASH IN GRAPHICAL FORMAT

MODEL SGE

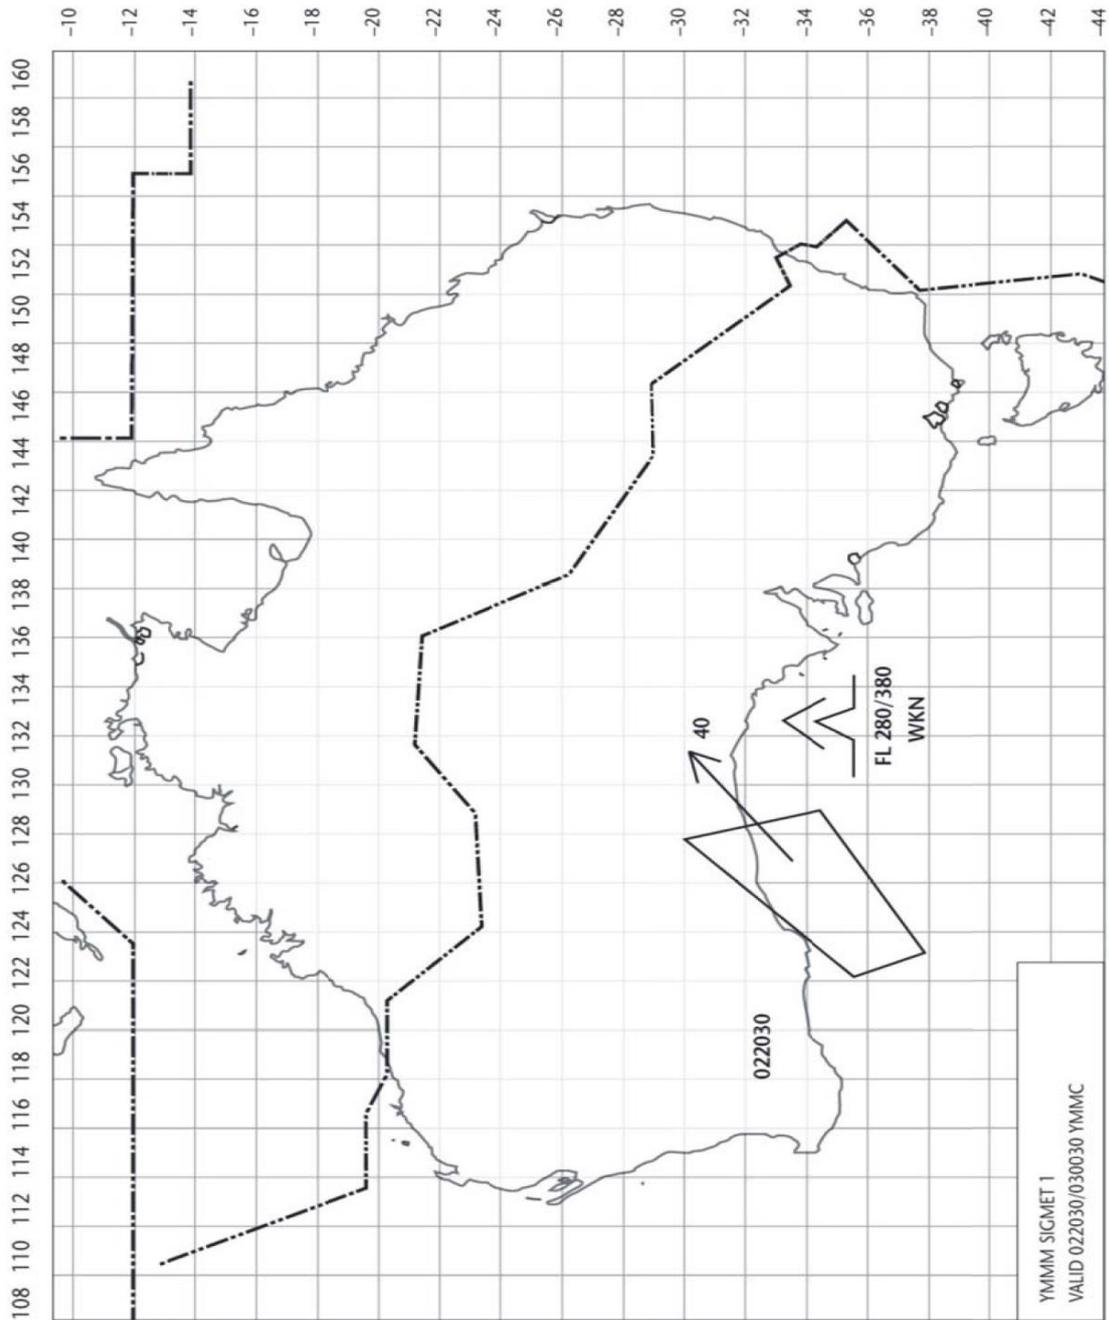

## SHEET OF NOTATIONS USED IN FLIGHT DOCUMENTATION

## MODEL SN


### 1. Symbols for significant weather

	Tropical cyclone		Drizzle
	Severe squall line*		Rain
	Moderate turbulence		Snow
	Severe turbulence		Shower
	Mountain waves		Hail
	Moderate aircraft icing		Widespread blowing snow
	Severe aircraft icing		Severe sand or dust haze
	Widespread fog		Widespread sandstorm or duststorm
	Radioactive materials in the atmosphere**		Widespread haze
	Volcanic eruption***		Widespread mist
	Mountain obscuration		Widespread smoke
			Freezing precipitation****

- \* In-flight documentation for flights operating up to FL 100. This symbol refers to "squall line".
- \*\* The following information should be included in a separate text box on the chart: radioactive materials in the atmosphere symbol; latitude/longitude of release site; and (if known) the name of the site of the radioactive source. In addition, the legend of SIGWX charts on which a release of radiation is indicated should contain "CHECK SIGMET AND NOTAM FOR RDOACT CLD". The centre of the radioactive materials in the atmosphere symbol should be placed on significant weather charts at the latitude/longitude site of the radioactive source.
- \*\*\* The following information should be included in a separate text box on the chart: volcanic eruption symbol; the name of the volcano (if known); and the latitude/longitude of the eruption.
- In addition, the legend of SIGWX charts should indicate "CHECK SIGMET, ADVISORIES FOR TC AND VA, AND ASHTAM AND NOTAM FOR VA". The dot on the base of the volcanic eruption symbol should be placed on significant weather charts at the latitude/longitude site of the volcanic event.
- \*\*\*\* This symbol does not refer to icing due to precipitation coming into contact with an aircraft which is at a very low temperature.
- Note: Height indications between which phenomena are expected, top above base as per chart legend.

### 2. Fronts and convergence zones and other symbols used

	Cold front at the surface		Position, speed and level of maximum wind
	Warm front at the surface		Convergence line
	Occluded front at the surface		Freezing level
	Quasi-stationary front at the surface		Intertropical convergence zone
	Tropopause high		State of the sea
	Tropopause low		Sea-surface temperature
	Tropopause level		Widespread strong surface wind*



Wind arrows indicate the maximum wind in jet and the flight level at which it occurs. If the maximum wind speed is 60 m/s (120 kt) or more, the flight levels between which winds are greater than 40 m/s (80 kt) is placed below the maximum wind level. In the example, winds are greater than 40 m/s (80 kt) between FL 220 and FL 400. The heavy line delineating the jet axis begins/ends at the points where a wind speed of 40 m/s (80 kt) is forecast.

⊥ Symbol used whenever the height of the jet axis changes by +/-3000 ft or the speed changes by +/-20 kt

\* This symbol refers to widespread surface wind speeds exceeding 15 m/s (30 kt).

### 3. Abbreviations used to describe clouds

- #### 3.1 Type
- |                   |                    |                   |
|-------------------|--------------------|-------------------|
| CI = Cirrus       | AS = Altostratus   | ST = Stratus      |
| CC = Cirrocumulus | NS = Nimbostratus  | CU = Cumulus      |
| CS = Cirrostratus | SC = Stratocumulus | CB = Cumulonimbus |
| AC = Altocumulus  |                    |                   |
- #### 3.2 Amount
- Clouds except CB
- |                              |                           |
|------------------------------|---------------------------|
| FEW = low (1/8 to 2/8)       | BKN = broken (5/8 to 7/8) |
| SCT = scattered (3/8 to 4/8) | OVC = overcast (8/8)      |
- CB only
- |                                                                               |
|-------------------------------------------------------------------------------|
| ISOL = individual CBs (isolated)                                              |
| OCNL = well-separated CBs (occasional)                                        |
| FRQ = CBs with little or no separation (frequent)                             |
| EMBD = CBs embedded in layers of other clouds or concealed by haze (embedded) |

#### 3.3 Heights

Heights are indicated on SWH and SWM charts in flight levels (FL), top over base. When XXX is used, tops or bases are outside the layer of the atmosphere to which the chart applies.

In SWL charts:

- Heights are indicated as altitudes above mean sea level;
- The abbreviation SFC is used to indicate ground level.

### 4. Depicting of lines and systems on specific charts

#### 4.1 Models SWH and SWM – Significant weather charts (high and medium)

- |                                                             |                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Scalloped line                                              | = demarcation of areas of significant weather                                                                                                                                                                                                                                                                                                                                       |
| Heavy broken line                                           | = delineation of area of CAT                                                                                                                                                                                                                                                                                                                                                        |
| Heavy solid line interrupted by wind arrow and flight level | = position of jet stream axis with indication of wind direction, speed in kt or m/s and height in flight levels. The vertical extent of the jet stream is indicated (in flight levels), e.g. FL 270 accompanied by 240/290 indicates that the jet extends from FL 240 to FL 290.                                                                                                    |
| Flight levels inside small rectangles                       | = height in flight levels of tropopause at spot locations, e.g. <span style="border: 1px solid black; padding: 2px;">445</span> . Low and high points of the tropopause topography are indicated by the letters L or H, respectively, inside a pentagon with the height in flight levels. Display explicit FL for jet depths and tropopause height even if outside forecast bounds. |

#### 4.2 Model SWL – Significant weather chart (low level)

- |                                                  |                                                                                                                                                                                                                        |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| X                                                | = position of pressure centres given in hectopascals                                                                                                                                                                   |
| L                                                | = centre of low pressure                                                                                                                                                                                               |
| H                                                | = centre of high pressure                                                                                                                                                                                              |
| Scalloped lines                                  | = demarcation of area of significant weather                                                                                                                                                                           |
| Dashed lines                                     | = altitude of 0°C isotherm in feet (hecto-feet) or metres<br>Note: 0°C level may also be indicated by <span style="border: 1px solid black; padding: 2px;">01065</span> , i.e. 0°C level is at an altitude of 6000 ft. |
| Figures on arrows                                | = speed in kt or km/h of movement of frontal systems, depressions or anticyclones                                                                                                                                      |
| Figure inside the state of the sea symbol        | = total wave height in feet or metres                                                                                                                                                                                  |
| Figure inside the sea-surface temperature symbol | = sea-surface temperature in °C                                                                                                                                                                                        |
| Figures inside the strong surface wind symbol    | = wind in kt or m/s                                                                                                                                                                                                    |

#### 4.3 Arrows, feathers and pennants

Arrows indicate direction. Number of pennants and/or feathers correspond to speed.

- Example: 270°/115 kt (equivalent to 57.5 m/s)
- Pennants correspond to 50 kt or 25 m/s
  - Feathers correspond to 10 kt or 5 m/s
  - Half-feathers correspond to 5 kt or 2.5 m/s

\* A conversion factor of 1 to 2 is used.

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to WAFS & Meteorological Offices	APP 2	Page: 1

## **APPENDIX 2. TECHNICAL SPECIFICATIONS RELATED TO GLOBAL SYSTEMS, SUPPORTING CENTRES AND METEOROLOGICAL OFFICES**

*(See Chapter 3 of this document.)*

### **1. WORLD AREA FORECAST SYSTEM**

1.2.1 ICAO stipulates in Appendix 2 of Annex 3 the technical specifications related to world area forecast system required of the contracting states which have accepted responsibilities for providing a WAFC within the framework of the world area forecast system.

1.2 Bhutan is not a WAFC. However, the MET service provider shall have to be familiar with the technical specifications so as to be able to interact with them and use its products/services effectively.

### **2. AERODROME METEOROLOGICAL OFFICES**

#### **2.1 Use of world area forecast system (WAFS) products**

2.1.1 The aerodrome meteorological office shall use forecasts issued by the WAFCs in the preparation of flight documentation, whenever these forecasts cover the intended flight path in respect of time, altitude and geographical extent, unless otherwise agreed between the MET service provider and the operator concerned.

2.1.2 In order to ensure uniformity and standardisation of flight documentation, the WAFS GRIB and BUFR data received and, IWXXM data received, shall be decoded into standard WAFS charts in accordance with relevant provisions in this BCAR, and the meteorological content and identification of the originator of the WAFS forecasts shall not be amended.

#### **2.2 Notification of WAFC concerning significant discrepancies**

2.2.1 The aerodrome meteorological office using WAFS BUFR or IWXXM data shall notify the WAFC concerned immediately if significant discrepancies are detected or reported in respect of WAFS SIGWX forecasts concerning:

- a) icing, turbulence, cumulonimbus clouds that are obscured, frequent, embedded or occurring at a squall line, and sandstorms/dust storms; and
- b) volcanic eruptions or a release of radioactive materials into the atmosphere, of significance to aircraft operations.

The WAFC receiving the message shall acknowledge its receipt to the originator, together with a brief comment on the report and any action taken, using the same means of communication employed by the originator.

*Note.— Guidance on reporting significant discrepancies is provided in the Manual of Aeronautical Meteorological Practice (ICAO Doc 8896).*

### **3. Volcanic ash advisory centre**

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to WAFS & Meteorological Offices	APP 2	Page: 2

(Not applicable)

**4. State volcano observatories**

(Not applicable)

**5. Tropical cyclone advisory centres**

(Not applicable)

**6. Space weather centres**

(Not applicable)

---

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 1

## **APPENDIX 3. TECHNICAL SPECIFICATIONS RELATED TO METEOROLOGICAL OBSERVATIONS AND REPORTS**

*(See Chapter 4 of this document.)*

### **1. GENERAL PROVISION RELATED TO METEOROLOGICAL OBSERVATIONS**

1.1 The meteorological instruments used at an aerodrome should be situated in such a way as to supply data which are representative of the area for which the measurements are required.

*Note.— Specifications concerning the siting of equipment and installations on operational areas, aimed at reducing the hazard to aircraft to a minimum, are contained in BCAR - 14, Volume I, Chapter 9.*

1.2 Meteorological instruments at aeronautical meteorological stations should be exposed, operated and maintained in accordance with the practices, procedures and specifications promulgated by the World Meteorological Organization (WMO).

1.3 The observers at an aerodrome should be located, in so far as is practicable, so as to supply data which are representative of the area for which the observations are required.

1.4 Where automated equipment forms part of an integrated semi-automatic observing system, displays of data which are made available to the local air traffic services units should be a subset of and displayed parallel to those available in the local meteorological service unit. In those displays, each meteorological element should be annotated to identify, as appropriate, the locations for which the element is representative.

### **2. GENERAL CRITERIA RELATED TO METEOROLOGICAL REPORTS**

#### **2.1 Format of meteorological reports**

2.1.1 Local routine and special reports shall be issued in abbreviated plain language, in accordance with the template shown in Table A3-1.

2.1.2 METAR and SPECI shall be issued in accordance with the template shown in Table A3-2 and disseminated in the METAR and SPECI code forms prescribed by WMO.

*Note.— The METAR and SPECI code forms are contained in the Manual on Codes (WMO-No. 306), Volume I.1, Part A — Alphanumeric Codes.*

2.1.3 METAR and SPECI shall be disseminated in IWXXM GML form and/or in accordance with 2.1.2.

*Note.— The technical specifications for IWXXM are contained in the Manual on Codes (WMO-No. 306), Volume I.3, Part D — Representation Derived from Data Models. Guidance on the implementation of IWXXM is provided in the Manual on the ICAO Meteorological Information Exchange Model (IWXXM) (ICAO Doc 10003).*

#### **2.2 Use of CAVOK**

When the following conditions occur simultaneously at the time of observation:

- a) visibility, 10 km or more, and the lowest visibility is not reported;

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 2

*Note 1.— In local routine and special reports, visibility refers to the value(s) to be reported in accordance with 4.2.4.2 and 4.2.4.3; in METAR and SPECI, visibility refers to the value(s) to be reported in accordance with 4.2.4.4.*

*Note 2.— The lowest visibility is reported in accordance with 4.2.4.4 a).*

- b) no cloud of operational significance;
- c) no weather of significance to aviation as given in 4.4.2.3, 4.4.2.5 and 4.4.2.6; information on visibility, runway visual range, present weather and cloud amount, cloud type and height of cloud base shall be replaced in all meteorological reports by the term “CAVOK”.

### **2.3 Criteria for issuance of local special reports and SPECI**

2.3.1 The list of criteria for the issuance of local special reports shall include the following:

- a) those values which most closely correspond with the operating minima of the operators using the aerodrome;
- b) those values which satisfy other local requirements of the air traffic services units and of the operators;
- c) an increase in air temperature of 2°C or more from that given in the latest report, or an alternative threshold value as agreed between the designated MET service provider, the appropriate ATS authority and the operators concerned;
- d) the available supplementary information concerning the occurrence of significant meteorological conditions in the approach and climb-out areas as given in Table A3-1;
- e) when noise abatement procedures are applied in accordance with the PANS-ATM (ICAO Doc 4444) and the variation from the mean surface wind speed (gusts) has changed by 2.5 m/s (5 kt) or more from that at the time of the latest report, the mean speed before and/or after the change being 7.5 m/s (15 kt) or more; and
- f) those values which constitute criteria for SPECI.

2.3.2 Where required in accordance with Chapter 4, 4.4.2 b), SPECI shall be issued whenever changes in accordance with the following criteria occur:

- a) when the mean surface wind direction has changed by 60° or more from that given in the latest report, the mean speed before and/or after the change being 5 m/s (10 kt) or more;
- b) when the mean surface wind speed has changed by 5 m/s (10 kt) or more from that given in the latest report;
- c) when the variation from the mean surface wind speed (gusts) has changed by 5 m/s (10 kt) or more from that at the time of the latest report, the mean speed before and/or after the change being 7.5 m/s (15 kt) or more;
- d) when the onset, cessation or change in intensity of any of the following weather phenomena occurs:

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 3

- freezing precipitation
  - moderate or heavy precipitation (including showers thereof)
  - thunderstorm (with precipitation);
- e) when the onset or cessation of any of the following weather phenomena occurs:
- freezing fog
  - thunderstorm (without precipitation);
- f) when the amount of a cloud layer below 450 m (1 500 ft) changes:
- from SCT or less to BKN or OVC; or
  - from BKN or OVC to SCT or less.

2.3.3 Where required in accordance with Chapter 4, 4.4.2 b), SPECI should be issued whenever changes in accordance with the following criteria occur:

- a) when the wind changes through values of operational significance. The threshold values should be established by the designated MET service provider in consultation with the appropriate ATS authority and the operators concerned, taking into account changes in the wind which would:
- 1) require a change in runway(s) in use; and
  - 2) indicate that the runway tailwind and crosswind components have changed through values representing the main operating limits for typical aircraft operating at the aerodrome;
- b) when the visibility is improving and changes to or passes through one or more of the following values, or when the visibility is deteriorating and passes through one or more of the following values:
- 1) 800, 1 500 or 3 000 m; and
  - 2) 5 000 m, in cases where significant numbers of flights are operated in accordance with the visual flight rules;

*Note 1.— In local special reports, visibility refers to the value(s) to be reported in accordance with 4.2.4.2 and 4.2.4.3; in SPECI, visibility refers to the value(s) to be reported in accordance with 4.2.4.4.*

*Note 2.— Visibility refers to “prevailing visibility” except in the case where only the lowest visibility is reported in accordance with 4.2.4.4 b).*

- c) when the runway visual range is improving and changes to or passes through one or more of the following values, or when the runway visual range is deteriorating and passes through one or more of the following values: 50, 175, 300, 550 or 800 m;
- d) when the onset, cessation or change in intensity of any of the following weather phenomena occurs:

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 4

- duststorm
  - sandstorm
  - funnel cloud (tornado or waterspout);
- e) when the onset or cessation of any of the following weather phenomena occurs:
- low drifting dust, sand or snow
  - blowing dust, sand or snow
  - squall;
- f) when the height of base of the lowest cloud layer of BKN or OVC extent is lifting and changes to or passes through one or more of the following values, or when the height of base of the lowest cloud layer of BKN or OVC extent is lowering and passes through one or more of the following values:
- 1) 30, 60, 150 or 300 m (100, 200, 500 or 1 000 ft); and
  - 2) 450 m (1 500 ft), in cases where significant numbers of flights are operated in accordance with the visual flight rules;
- g) when the sky is obscured and the vertical visibility is improving and changes to or passes through one or more of the following values, or when the vertical visibility is deteriorating and passes through one or more of the following values: 30, 60, 150 or 300 m (100, 200, 500 or 1 000 ft); and
- h) any other criteria based on local aerodrome operating minima, as agreed between the designated MET service provider and the operators concerned.

*Note.— Other criteria based on local aerodrome operating minima are to be considered in parallel with similar criteria for the inclusion of change groups and for the amendment of TAF developed in response to Appendix 5, 1.3.2 j).*

2.3.4 When a deterioration of one weather element is accompanied by an improvement in another element, a single SPECI shall be issued; it shall then be treated as a deterioration report.

### **3. DISSEMINATION OF METEOROLOGICAL REPORTS**

#### **3.1 METAR and SPECI**

3.1.1 METAR and SPECI shall be disseminated to international OPMET databanks and the centres designated by regional air navigation agreement for the operation of aeronautical fixed service Internet-based services, in accordance with regional air navigation agreement.

3.1.2 METAR and SPECI shall be disseminated to other aerodromes in accordance with regional air navigation agreement.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 5

3.1.3 SPECI representing a deterioration in conditions shall be disseminated immediately after the observation. A SPECI representing a deterioration of one weather element and an improvement in another element shall be disseminated immediately after the observation.

3.1.4 A SPECI representing an improvement in conditions should be disseminated only after the improvement has been maintained for 10 minutes; it should be amended before dissemination, if necessary, to indicate the conditions prevailing at the end of that 10-minute period.

### 3.2 Local routine and special reports

3.2.1 Local routine reports shall be transmitted to local air traffic services units and shall be made available to the operators and to other users at the aerodrome.

3.2.2 Local special reports shall be transmitted to local air traffic services units as soon as the specified conditions occur. However, as agreed between the designated MET service provider and the appropriate ATS authority, they need not be issued in respect of:

- a) any element for which there is in the local air traffic services unit a display corresponding to the one in the meteorological station, and where arrangements are in force for the use of this display to update information included in local routine and special reports; and
- b) runway visual range, when all changes of one or more steps on the reporting scale in use are being reported to the local air traffic services unit by an observer on the aerodrome.

Local special reports shall also be made available to the operators and to other users at the aerodrome.

## 4. OBSERVING AND REPORTING OF METEOROLOGICAL ELEMENTS

*Introductory Note.— Selected criteria applicable to meteorological information referred to under 4.1 to 4.8 for inclusion in aerodrome reports are given in tabular form at Attachment C.*

### 4.1 Surface wind

#### 4.1.1 Siting

4.1.1.1 Surface wind should be observed at a height of  $10 \pm 1$  m ( $30 \pm 3$  ft) above the ground.

4.1.1.2 Representative surface wind observations should be obtained by the use of sensors appropriately sited. Sensors for surface wind observations for local routine and special reports should be sited to give the best practicable indication of conditions along the runway and touchdown zones. At aerodromes where topography or prevalent weather conditions cause significant differences in surface wind at various sections of the runway, additional sensors should be provided.

*Note.— Since, in practice, the surface wind cannot be measured directly on the runway, surface wind observations for take-off and landing are expected to be the best practicable indication of the winds which an aircraft will encounter during take-off and landing.*

#### 4.1.2 Displays

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 6

4.1.2.1 Surface wind displays relating to each sensor shall be located in the meteorological station with corresponding displays in the appropriate air traffic services units. The displays in the meteorological station and in the air traffic services units shall relate to the same sensors, and where separate sensors are required as specified in 4.1.1.2, the displays shall be clearly marked to identify the runway and section of runway monitored by each sensor.

4.1.2.2 The mean values of, and significant variations in, the surface wind direction and speed for each sensor should be derived and displayed by automated equipment.

4.1.3.1 The averaging period for surface wind observations shall be:

- a) 2 minutes for local routine and special reports and for wind displays in air traffic services units; and
- b) 10 minutes for METAR and SPECI, except that when the 10-minute period includes a marked discontinuity in the wind direction and/or speed, only data occurring after the discontinuity shall be used for obtaining mean values; hence, the time interval in these circumstances shall be correspondingly reduced.

*Note.— A marked discontinuity occurs when there is an abrupt and sustained change in wind direction of 30° or more, with a wind speed of 5 m/s (10 kt) before or after the change, or a change in wind speed of 5 m/s (10 kt) or more, lasting at least 2 minutes.*

4.1.3.2 The averaging period for measuring variations from the mean wind speed (gusts) reported in accordance with 4.1.5.2 c) should be 3 seconds for local routine reports, local special reports, METAR, SPECI and wind displays used for depicting variations from the mean wind speed (gusts) in air traffic services units.

#### 4.1.4 Accuracy of measurement

The reported direction and speed of the mean surface wind, as well as variations from the mean surface wind, should meet the operationally desirable accuracy of measurement as given in Attachment A.

#### 4.1.5 Reporting

4.1.5.1 In local routine reports, local special reports, METAR and SPECI, the surface wind direction and speed shall be reported in steps of 10 degrees true and 1 metre per second (or 1 knot), respectively. Any observed value which does not fit the reporting scale in use shall be rounded to the nearest step in the scale.

4.1.5.2 In local routine reports, local special reports, METAR and SPECI:

- a) the units of measurement used for the wind speed shall be indicated;
- b) variations from the mean wind direction during the past 10 minutes shall be reported as follows, if the total variation is 60° or more:
  - 1) when the total variation is 60° or more and less than 180° and the wind speed is 1.5 m/s (3 kt) or more, such directional variations shall be reported as the two extreme directions between which the surface wind has varied;
  - 2) when the total variation is 60° or more and less than 180° and the wind speed is less than 1.5 m/s (3 kt), the wind direction shall be reported as variable with no mean wind direction; or

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 7

- 3) when the total variation is 180° or more, the wind direction shall be reported as variable with no mean wind direction;
- c) variations from the mean wind speed (gusts) during the past 10 minutes shall be reported when the maximum wind speed exceeds the mean speed by:
  - 1) 2.5 m/s (5 kt) or more in local routine and special reports when noise abatement procedures are applied in accordance with the PANS-ATM (ICAO Doc 4444); or
  - 2) m/s (10 kt) or more otherwise;
- d) when a wind speed of less than 0.5 m/s (1 kt) is reported, it shall be indicated as calm;
- e) when a wind speed of 50 m/s (100 kt) or more is reported, it shall be indicated to be more than 49 m/s (99 kt); and
- f) when the 10-minute period includes a marked discontinuity in the wind direction and/or speed, only variations from the mean wind direction and mean wind speed occurring since the discontinuity shall be reported.

*Note.— See note under 4.1.3.1.*

#### 4.1.5.3 In local routine and special reports:

- a) if the surface wind is observed from more than one location along the runway, the locations for which these values are representative shall be indicated;
- b) when there is more than one runway in use and the surface wind related to these runways is observed, the available wind values for each runway shall be given, and the runways to which the values refer shall be reported;
- c) when variations from the mean wind direction are reported in accordance with 4.1.5.2 b) 2), the two extreme directions between which the surface wind has varied shall be reported; and
- d) when variations from the mean wind speed (gusts) are reported in accordance with 4.1.5.2 c), they shall be reported as the maximum and minimum values of the wind speed attained.

4.1.5.4 In METAR and SPECI, when variations from the mean wind speed (gusts) are reported in accordance with 4.1.5.2 c), the maximum value of the wind speed attained shall be reported.

## 4.2 Visibility

### 4.2.1 Siting

4.2.1.1 When instrumented systems are used for the measurement of visibility, the visibility should be measured at a height of approximately 2.5 m (7.5 ft) above the runway.

4.2.1.2 When instrumented systems are used for the measurement of visibility, representative visibility observations should be obtained by the use of sensors appropriately sited. Sensors for visibility observations for local routine and special reports should be sited to give the best practicable indications of visibility along the runway and touchdown zone.

### 4.2.2 Displays

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 8

When instrumented systems are used for the measurement of visibility, visibility displays relating to each sensor should be located in the meteorological station with corresponding displays in the appropriate air traffic services units. The displays in the meteorological station and in the air traffic services units should relate to the same sensors, and where separate sensors are required as specified in 4.2.1, the displays should be clearly marked to identify the area, e.g. runway and section of runway, monitored by each sensor.

#### 4.2.3 Averaging

When instrumented systems are used for the measurement of visibility, their output should be updated at least every 60 seconds to permit provision of current representative values. The averaging period should be:

- a) 1 minute for local routine and special reports and for visibility displays in air traffic services units; and
- b) 10 minutes for METAR and SPECI, except that when the 10-minute period immediately preceding the observation includes a marked discontinuity in the visibility, only those values occurring after the discontinuity should be used for obtaining mean values.

*Note.— A marked discontinuity occurs when there is an abrupt and sustained change in visibility, lasting at least 2 minutes, which reaches or passes through criteria for the issuance of SPECI reports given in 2.3.*

#### 4.2.4 Reporting

4.2.4.1 In local routine reports, local special reports, METAR and SPECI, the visibility shall be reported in steps of 50 m when it is less than 800 m; in steps of 100 m when it is 800 m or more but less than 5 km; in kilometre steps when it is 5 km or more but less than 10 km; and as 10 km when it is 10 km or more except when the conditions for the use of CAVOK apply. Any observed value which does not fit the reporting scale in use shall be rounded down to the nearest lower step in the scale.

*Note.— Specifications concerning the use of CAVOK are given in 2.2.*

4.2.4.2 In local routine and special reports, visibility along the runway(s) shall be reported together with the units of measurement used to indicate visibility.

4.2.4.3 In local routine and special reports, when instrumented systems are used for the measurement of visibility:

- a) if the visibility is observed from more than one location along the runway as specified in Chapter 4, 4.6.2.2, the values representative of the touchdown zone should be reported first, followed, as necessary, by the values representative of the mid-point and stop-end of the runway, and the locations for which these values are representative should be indicated; and
- b) when there is more than one runway in use and the visibility is observed related to these runways, the available visibility values for each runway should be reported, and the runways to which the values refer should be indicated.

4.2.4.4 In METAR and SPECI, visibility should be reported as prevailing visibility, as defined in Chapter 1. When the visibility is not the same in different directions and

- a) when the lowest visibility is different from the prevailing visibility, and 1) less than 1 500 m or 2) less than 50 per cent of the prevailing visibility and less than 5 000 m; the lowest visibility observed should also be reported and, when possible, its general direction in relation to the

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 9

aerodrome reference point indicated by reference to one of the eight points of the compass. If the lowest visibility is observed in more than one direction, then the most operationally significant direction should be reported; and

- b) when the visibility is fluctuating rapidly, and the prevailing visibility cannot be determined, only the lowest visibility should be reported, with no indication of direction.

### 4.3 Runway visual range

#### 4.3.1 Siting

4.3.1.1 Runway visual range should be assessed at a height of approximately 2.5 m (7.5 ft) above the runway for instrumented systems or assessed at a height of approximately 5 m (15 ft) above the runway by a human observer.

4.3.1.2 Runway visual range should be assessed at a lateral distance from the runway centre line of not more than 120 m. The site for observations to be representative of the touchdown zone should be located about 300 m along the runway from the threshold. The sites for observations to be representative of the mid-point and stop-end of the runway should be located at a distance of 1 000 to 1 500 m along the runway from the threshold and at a distance of about 300 m from the other end of the runway. The exact position of these sites and, if necessary, additional sites should be decided after considering aeronautical, meteorological and climatological factors such as long runways, swamps and other fog-prone areas.

#### 4.3.2 Instrumented systems

*Note.— Since accuracy can vary from one instrument design to another, performance characteristics are to be checked before selecting an instrument for assessing runway visual range. The calibration of a forward-scatter meter has to be traceable and verifiable to a transmissometer standard, the accuracy of which has been verified over the intended operational range. Guidance on the use of transmissometers and forward-scatter meters in instrumented runway visual range systems is given in the Manual of Runway Visual Range Observing and Reporting Practices (ICAO Doc 9328).*

4.3.2.1 Instrumented systems based on transmissometers or forward-scatter meters shall be used to assess runway visual range on runways intended for Category II and III instrument approach and landing operations.

4.3.2.2 Instrumented systems based on transmissometers or forward-scatter meters should be used to assess runway visual range on runways intended for Category I instrument approach and landing operations.

#### 4.3.3 Display

4.3.3.1 Where runway visual range is determined by instrumented systems, one display or more, if required, shall be located in the meteorological station with corresponding displays in the appropriate air traffic services units. The displays in the meteorological station and in the air traffic services units shall be related to the same sensors, and where separate sensors are required as specified in 4.3.1.2, the displays shall be clearly marked to identify the runway and section of runway monitored by each sensor.

4.3.3.2 Where runway visual range is determined by human observers, runway visual range should be reported to the appropriate local air traffic services units, whenever there is a change in the value to be reported in accordance with the reporting scale (except where the provisions of 3.2.2 a) or b) apply). The transmission of such reports should normally be completed within 15 seconds after the termination of the observation.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 10

#### 4.3.4 Averaging

Where instrumented systems are used for the assessment of runway visual range, their output shall be updated at least every 60 seconds to permit the provision of current, representative values. The averaging period for runway visual range values shall be:

- a) 1 minute for local routine and special reports and for runway visual range displays in air traffic services units; and
- b) 10 minutes for METAR and SPECI, except that when the 10-minute period immediately preceding the observation includes a marked discontinuity in runway visual range values, only those values occurring after the discontinuity shall be used for obtaining mean values.

*Note.— A marked discontinuity occurs when there is an abrupt and sustained change in runway visual range, lasting at least 2 minutes, which reaches or passes through the values 800, 550, 300 and 175 m.*

#### 4.3.5 Runway light intensity

When instrumented systems are used for the assessment of runway visual range, computations should be made separately for each available runway. For local routine and special reports, the light intensity to be used for the computation should be:

- a) for a runway with the lights switched on and a light intensity of more than 3 per cent of the maximum light intensity available, the light intensity actually in use on that runway;
- b) for a runway with the lights switched on and a light intensity of 3 percent or less of the maximum light intensity available, the optimum light intensity that would be appropriate for operational use in the prevailing conditions; and
- c) for a runway with lights switched off (or at the lowest setting pending the resumption of operations), the optimum light intensity that would be appropriate for operational use in the prevailing conditions.

In METAR and SPECI, the runway visual range should be based on the maximum light intensity available on the runway.

*Note.— Guidance on the conversion of instrumented readings into runway visual range is given at Attachment D.*

#### 4.3.6 Reporting

4.3.6.1 In local routine reports, local special reports, METAR and SPECI, the runway visual range shall be reported in steps of 25 m when it is less than 400 m; in steps of 50 m when it is between 400 m and 800 m; and in steps of 100 m when it is more than 800 m. Any observed value which does not fit the reporting scale in use shall be rounded down to the nearest lower step in the scale.

4.3.6.2 Fifty metres should be considered the lower limit and 2 000 metres the upper limit for runway visual range. Outside of these limits, local routine reports, local special reports, METAR and SPECI should merely indicate that the runway visual range is less than 50 m or more than 2 000 m.

4.3.6.3 In local routine reports, local special reports, METAR and SPECI:

- a) when runway visual range is above the maximum value that can be determined by the system in use, it shall be reported using the abbreviation “ABV” in local routine and special reports and the abbreviation “P” in METAR and SPECI, followed by the maximum value that can be determined by the system; and

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 11

- b) when the runway visual range is below the minimum value that can be determined by the system in use, it shall be reported using the abbreviation “BLW” in local routine and special reports and the abbreviation “M” in METAR and SPECI, followed by the minimum value that can be determined by the system.

4.3.6.4 In local routine and special reports:

- a) the units of measurement used shall be included;
- b) if runway visual range is observed from only one location along the runway, i.e. the touchdown zone, it shall be included without any indication of location;
- c) if the runway visual range is observed from more than one location along the runway, the value representative of the touchdown zone shall be reported first, followed by the values representative of the mid-point and stop-end and the locations for which these values are representative shall be indicated; and
- d) when there is more than one runway in use, the available runway visual range values for each runway shall be reported and the runways to which the values refer shall be indicated.

4.3.6.5 In METAR and SPECI:

- a) only the value representative of the touchdown zone should be reported and no indication of location on the runway should be included; and
- b) where there is more than one runway available for landing, touchdown zone runway visual range values should be included for all such runways, up to a maximum of four, and the runways to which the values refer should be indicated.

4.3.6.6 In METAR and SPECI when instrumented systems are used for the assessment of runway visual range, the variations in runway visual range during the 10-minute period immediately preceding the observation should be included if the runway visual range values during the 10-minute period have shown a distinct tendency, such that the mean during the first 5 minutes varies by 100 m or more from the mean during the second 5 minutes of the period. When the variation of the runway visual range values shows an upward or downward tendency, this should be indicated by the abbreviation “U” or “D”, respectively. In circumstances when actual fluctuations during the 10-minute period show no distinct tendency, this should be indicated using the abbreviation “N”. When indications of tendency are not available, no abbreviations should be included.

## 4.4 Present weather

### 4.4.1 Siting

When instrumented systems are used for observing present weather phenomena listed under 4.4.2.3 and 4.4.2.4, representative information should be obtained by the use of sensors appropriately sited.

### 4.4.2 Reporting

4.4.2.1 In local routine and special reports, observed present weather phenomena shall be reported in terms of type and characteristics and qualified with respect to intensity, as appropriate.

4.4.2.2 In METAR and SPECI, observed present weather phenomena shall be reported in terms of type and characteristics and qualified with respect to intensity or proximity to the aerodrome, as appropriate

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

4.4.2.3 In local routine reports, local special reports, METAR and SPECI, the following types of present weather phenomena should be reported, using their respective abbreviations and relevant criteria, as appropriate:

c) *Precipitation*

*Drizzle* DZ

*Rain* RA

*Snow* SN

*Snow grains* SG

*Ice pellets* PL

*Hail* GR

— Reported when diameter of largest hailstones is 5 mm or more.

*Small hail and/or snow pellets* GS

— Reported when diameter of largest hailstones is less than 5 mm.

b) *Obscurations (hydrometeors)*

*Fog* FG

— Reported when visibility is less than 1 000 m, except when qualified by “MI”, “BC”, “PR” or “VC” (see 4.4.2.6 and 4.4.2.8).

*Mist* BR

— Reported when visibility is at least 1 000 m but not more than 5 000 m.

c) *Obscurations (lithometeors)*

— The following should be used only when the obscuration consists predominantly of lithometeors and the visibility is 5 000 m or less except “SA” when qualified by “DR” (see 4.4.2.6) and volcanic ash.

*Sand* SA

*Dust (widespread)* DU

*Haze* HZ

*Smoke* FU

*Volcanic ash* VA

d) *Other phenomena*

*Dust/sand whirls (dust devils)* PO

*Squall* SQ

*Funnel cloud (tornado or waterspout)* FC

*Duststorm* DS

*Sandstorm* SS

4.4.2.4 In automated local routine reports, local special reports, METAR and SPECI, in addition to the precipitation types listed under 4.4.2.3 a), the abbreviation UP should be used for unidentified precipitation

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 13

when the type of precipitation cannot be identified by the automatic observing system.

4.4.2.5 In local routine reports, local special reports, METAR and SPECI, the following characteristics of present weather phenomena, as necessary, shall be reported, using their respective abbreviations and relevant criteria, as appropriate:

*Thunderstorm*

*TS*

— Used to report a thunderstorm with precipitation in accordance with the templates shown in Tables A3-1 and A3-2. When thunder is heard or lightning is detected at the aerodrome during the 10-minute period preceding the time of observation but no precipitation is observed at the aerodrome, the abbreviation “TS” shall be used without qualification.

*Freezing*

*FZ*

— Supercooled water droplets or precipitation, used with types of present weather phenomena in accordance with the templates shown in Tables A3-1 and A3-2.

*Note.*— At aerodromes with human observers, lightning detection equipment may supplement human observations. For aerodromes with automatic observing systems, guidance on the use of lightning detection equipment intended for thunderstorm reporting is given in the Manual on Automatic Meteorological Observing Systems at Aerodromes (ICAO Doc 9837).

4.4.2.6 In local routine reports, local special reports, METAR and SPECI, the following characteristics of present weather phenomena, as necessary, should be reported, using their respective abbreviations and relevant criteria, as appropriate:

*Shower*

*SH*

— Used to report showers in accordance with the templates shown in Tables A3-1 and A3-2. Showers observed in the vicinity of the aerodrome (see 4.4.2.8) should be reported as “VCSH” without qualification regarding type or intensity of precipitation.

*Blowing*

*BL*

— Used in accordance with the templates shown in Tables A3-1 and A3-2 with types of present weather phenomena raised by the wind to a height of 2 m (6 ft) or more above the ground.

*Low drifting*

*DR*

— Used in accordance with the templates shown in Tables A3-1 and A3-2 with types of present weather phenomena raised by the wind to less than 2 m (6 ft) above ground level.

*Shallow*

*MI*

— Less than 2 m (6 ft) above ground level.

*Patches*

*BC*

— Fog patches randomly covering the aerodrome.

*Partial*

*PR*

— A substantial part of the aerodrome covered by fog while the remainder is clear.

4.4.2.7 In automated local routine reports, local special reports, METAR and SPECI, when showers (SH) referred to in 4.4.2.6 cannot be determined based upon a method that takes account of the presence of convective cloud, the precipitation should not be characterized by SH.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

4.4.2.8 In local routine reports, local special reports, METAR and SPECI, the relevant intensity or, as appropriate, the proximity to the aerodrome of the reported present weather phenomena should be indicated as follows:

	<i>(local routine and special reports)</i>	<i>(METAR and SPECI)</i>
<i>Light</i>	<i>FBL</i>	—
<i>Moderate</i>	<i>MOD</i>	<i>(no indication)</i>
<i>Heavy</i>	<i>HVY</i>	+

Used with types of present weather phenomena in accordance with the templates shown in Tables A3-1 and A3-2. Light intensity should be indicated only for precipitation.

*Vicinity* *VC*

— Between approximately 8 and 16 km of the aerodrome reference point and used only in METAR and SPECI with present weather in accordance with the template shown in Table A3-2 when not reported under 4.4.2.5 and 4.4.2.6.

4.4.2.9 In local routine reports, local special reports, METAR and SPECI:

- a) one or more, up to a maximum of three, of the present weather abbreviations given in 4.4.2.3 and 4.4.2.4 shall be used, as necessary, together with an indication, where appropriate, of the characteristics given in 4.4.2.5. and 4.4.2.6 and intensity or proximity to the aerodrome given in 4.4.2.8, so as to convey a complete description of the present weather of significance to flight operations;
- b) the indication of intensity or proximity, as appropriate, shall be reported first followed respectively by the characteristics and the type of weather phenomena; and
- c) where two different types of weather are observed, they shall be reported in two separate groups, where the intensity or proximity indicator refers to the weather phenomenon which follows the indicator. However, different types of precipitation occurring at the time of observation shall be reported as one single group with the dominant type of precipitation reported first and preceded by only one intensity qualifier which refers to the intensity of the total precipitation.

4.4.2.10 In automated local routine reports, local special reports, METAR and SPECI, the present weather should be replaced by “//” when the present weather cannot be observed by the automatic observing system due to a temporary failure of the system/sensor.

## 4.5 Clouds

### 4.5.1 Siting

When instrumented systems are used for the measurement of the cloud amount and the height of cloud base, representative observations should be obtained by the use of sensors appropriately sited. For local routine and special reports, in the case of aerodromes with precision approach runways, sensors for cloud amount and height of cloud base should be sited to give the best practicable indications of the cloud amount and height of cloud base at the threshold of the runway in use. For that purpose, a sensor should be installed at a distance of less than 1 200 m (4 000 ft) before the landing threshold.

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 15

#### 4.5.2 Display

When automated equipment is used for the measurement of the height of cloud base, height of cloud base display(s) should be located in the meteorological station with corresponding display(s) in the appropriate air traffic services units. The displays in the meteorological station and in the air traffic services units should relate to the same sensor, and where separate sensors are required as specified in 4.5.1, the displays should clearly identify the area monitored by each sensor.

#### 4.5.3 Reference level

The height of cloud base shall be reported above aerodrome elevation. When a precision approach runway is in use which has a threshold elevation 15 m (50 ft) or more below the aerodrome elevation, local arrangements shall be made in order that the height of cloud bases reported to arriving aircraft shall refer to the threshold elevation. In the case of reports from offshore structures, the height of cloud base shall be given above mean sea level.

#### 4.5.4 Reporting

4.5.4.1 In local routine reports, local special reports, METAR and SPECI, the height of cloud base shall be reported in steps of 30 m (100 ft) up to 3 000 m (10 000 ft).

4.5.4.2 At aerodromes where low-visibility procedures are established for approach and landing, as agreed between the MET service provider and the appropriate ATS authority, in local routine and special reports the height of cloud base should be reported in steps of 15 m (50 ft) up to and including 90 m (300 ft) and in steps of 30 m (100 ft) between 90 m (300 ft) and 3 000 m (10 000 ft), and the vertical visibility in steps of 15 m (50 ft) up to and including 90 m (300 ft) and in steps of 30 m (100 ft) between 90 m (300 ft) and 600 m (2 000 ft).

4.5.4.3 In local routine reports, local special reports, METAR and SPECI:

- a) cloud amount should be reported using the abbreviations “FEW” (1 to 2 oktas), “SCT” (3 to 4 oktas), “BKN” (5 to 7 oktas) or “OVC” (8 oktas);
- b) cumulonimbus clouds and towering cumulus clouds should be indicated as “CB” and “TCU”, respectively;
- c) the vertical visibility should be reported in steps of 30 m (100 ft) up to 600 m (2 000 ft);
- d) if there are no clouds of operational significance and no restriction on vertical visibility and the abbreviation “CAVOK” is not appropriate, the abbreviation “NSC” should be used;
- e) when several layers or masses of cloud of operational significance are observed, their amount and height of cloud base should be reported in increasing order of the height of cloud base, and in accordance with the following criteria:
  - 1) the lowest layer or mass, regardless of amount to be reported as FEW, SCT, BKN or OVC as appropriate;
  - 2) the next layer or mass, covering more than 2/8 to be reported as SCT, BKN or OVC as appropriate;
  - 3) the next higher layer or mass, covering more than 4/8 to be reported as BKN or OVC as appropriate; and

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 16

- 4) cumulonimbus and/or towering cumulus clouds, whenever observed and not reported in 1) to 3);
- f) when the cloud base is diffuse or ragged or fluctuating rapidly, the minimum height of cloud base, or cloud fragments, should be reported; and
- g) when an individual layer (mass) of cloud is composed of cumulonimbus and towering cumulus clouds with a common cloud base, the type of cloud should be reported as cumulonimbus only.

*Note.— Towering cumulus indicates cumulus congestus clouds of great vertical extent.*

4.5.4.4 Any observed value in 4.5.4.1, 4.5.4.2 and 4.5.4.3 c) which does not fit the reporting scale in use shall be rounded down to the nearest lower step in the scale.

4.5.4.5 In local routine and special reports:

- a) the units of measurement used for the height of cloud base and vertical visibility shall be indicated; and
- b) when there is more than one runway in use and the heights of cloud bases are observed by instruments for these runways, the available heights of cloud bases for each runway shall be reported and the runways to which the values refer shall be indicated.

4.5.4.6 In automated local routine reports, local special reports, METAR and SPECI:

- a) when the cloud type cannot be observed by the automatic observing system, the cloud type in each cloud group should be replaced by “///”;
- b) when no clouds are detected by the automatic observing system, it should be indicated by using the abbreviation “NCD”;
- c) when cumulonimbus clouds or towering cumulus clouds are detected by the automatic observing system and the cloud amount and/or the height of cloud base cannot be observed, the cloud amount and/or the height of cloud base should be replaced by “///”; and
- d) the vertical visibility should be replaced by “///” when the sky is obscured and the value of the vertical visibility cannot be determined by the automatic observing system due to a temporary failure of the system/sensor.

## **4.6 Air temperature and dew-point temperature**

### 4.6.1 Display

When automated equipment is used for the measurement of air temperature and dew-point temperature, air temperature and dew-point temperature displays should be located in the meteorological station with corresponding displays in the appropriate air traffic services units. The displays in the meteorological station and in the air traffic services units should relate to the same sensors.

### 4.6.2 Reporting

4.6.2.1 In local routine reports, local special reports, METAR and SPECI, the air temperature and the dew-point temperature shall be reported in steps of whole degrees Celsius. Any observed value which does not fit

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 17

the reporting scale in use shall be rounded to the nearest whole degree Celsius, with observed values involving 0.5° rounded up to the next higher whole degree Celsius.

4.6.2.2 In local routine reports, local special reports, METAR and SPECI, a temperature below 0°C shall be identified.

## 4.7 Atmospheric pressure

### 4.7.1 Display

When automated equipment is used for the measurement of atmospheric pressure, QNH and, if required in accordance with 4.7.3.2 b), QFE displays relating to the barometer shall be located in the meteorological station with corresponding displays in the appropriate air traffic services units. When QFE values are displayed for more than one runway, as specified in 4.7.3.2 d), the displays shall be clearly marked to identify the runway to which the QFE value displayed refers.

### 4.7.2 Reference level

The reference level for the computation of QFE should be the aerodrome elevation. For non-precision approach runways, the thresholds of which are 2 m (7 ft) or more below the aerodrome elevation, and for precision approach runways, the QFE, if required, should refer to the relevant threshold elevation.

### 4.7.3 Reporting

4.7.3.1 For local routine reports, local special reports, METAR and SPECI, QNH and QFE shall be computed in tenths of hectopascals and reported therein in steps of whole hectopascals, using four digits. Any observed value which does not fit the reporting scale in use shall be rounded down to the nearest lower whole hectopascal.

4.7.3.2 In local routine and special reports:

- a) QNH shall be included;
- b) QFE shall be included if required by users or as agreed between the meteorological authority, the ATS authority and the operators concerned, on a regular basis;
- c) the units of measurement used for QNH and QFE values shall be included; and
- d) if QFE values are required for more than one runway, the required QFE values for each runway shall be reported and the runways to which the values refer shall be indicated.

4.7.3.3 In METAR and SPECI, only QNH values shall be included.

## 4.8 Supplementary information

### 4.8.1 Reporting

4.8.1.1 In local routine reports, local special reports, METAR and SPECI, the following recent weather phenomena, i.e. weather phenomena observed at the aerodrome during the period since the last issued routine report or last hour, whichever is the shorter, but not at the time of observation, should be reported, up to a maximum of three groups, in accordance with the templates shown in Tables A3-1 and A3-2, in the supplementary information:

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

- freezing precipitation
- moderate or heavy precipitation (including showers thereof)
- blowing snow
- thunderstorm

*Note.— The meteorological authority, in consultation with users, may agree not to provide recent weather information where SPECI are issued.*

4.8.1.2 In local routine and special reports, the following significant meteorological conditions or combinations thereof, should be reported in supplementary information:

- |                                        |                    |
|----------------------------------------|--------------------|
| — cumulonimbus clouds                  | CB                 |
| — Thunderstorm                         | TS                 |
| — moderate or severe turbulence        | MOD TURB, SEV TURB |
| — wind shear                           | WS                 |
| — Hail                                 | GR                 |
| — severe squall line                   | SEV SQL            |
| — moderate or severe icing             | MOD ICE, SEV ICE   |
| — freezing precipitation               | FZDZ, FZRA         |
| — severe mountain waves                | SEV MTW            |
| — duststorm, sandstorm                 | DS, SS             |
| — blowing snow                         | BLSN               |
| — funnel cloud (tornado or waterspout) | FC                 |

The location of the condition should be indicated. Where necessary, additional information should be included using abbreviated plain language.

4.8.1.3 In automated local routine reports, local special reports, METAR and SPECI, in addition to the recent weather phenomena listed under 4.8.1.1, recent unknown precipitation should be reported in accordance with the template shown in Table A3-2 when the type of precipitation cannot be identified by the automatic observing system.

*Note.— The meteorological authority, in consultation with users, may agree not to provide recent weather information where SPECI are issued.*

4.8.1.4 In METAR and SPECI, where local circumstances so warrant, information on wind shear should be added.

*Note.— The local circumstances referred to in 4.8.1.4 include, but are not necessarily limited to, wind shear of a nontransitory nature such as might be associated with low-level temperature inversions or local topography.*

4.8.1.5 In METAR and SPECI, the following information should be included in the supplementary information, in accordance with regional air navigation agreement:

- a) (Reserved)
- b) information on the state of the runway provided by the appropriate airport authority

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 19

*Note.— The state of the runway is specified in the Manual on Codes (WMO-No. 306), Volume I.1, Part A — Alphanumeric Codes, Code Tables 0366, 0519, 0919 and 1079.*

4.8.1.6 (Not applicable)

(INTENTIONALLY LEFT BLANK)

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

**Table A3-1. Template for the local routine (MET REPORT) and local special (SPECIAL) reports**

Key: M = inclusion mandatory, part of every message;  
 C = inclusion conditional, dependent on meteorological conditions;  
 O = inclusion optional.

*Note 1.— The ranges and resolutions for the numerical elements included in the local routine and special reports are shown in Table A3-4 of this appendix.*

*Note 2.— The explanations for the abbreviations can be found in the Procedures for Air Navigation Services — ICAO Abbreviations and Codes (PANS-ABC, ICAO Doc 8400)*

Element as specified in Chapter 4	Detailed content	Template(s)			Examples	
Identification of the type of report (M)	Type of report	MET REPORT or SPECIAL			MET REPORT SPECIAL	
Location indicator (M)	ICAO location indicator (M)	nnnn			YUDO <sub>1</sub>	
Time of the observation (M)	Day and actual time of the observation in UTC	nnnnnnZ			221630Z	
Identification of an automated report (C)	Automated report identifier (C)	AUTO			AUTO	
Surface wind (M)	Name of the element (M)	WIND			WIND 240/4MPS (WIND 240/8KT)  WIND RWY 18 TDZ 190/6MPS (WIND RWY 18 TDZ 190/12KT)  WIND VRB1MPS (WIND VRB2KT) WIND VRB BTN 350/ AND 050/1MPS (WIND VRB BTN 350/ AND 050/2KT)  WIND 270/ABV49MPS (WIND 270/ABV99KT)  WIND 120/3MPS MAX9 MNM2 (WIND 120/6KT MAX18 MNM4)  WIND 020/5MPS VRB BTN 350/ AND 070/ (WIND 020/10KT VRB BTN 350/ AND 070/)  WIND RWY 14R MID 140/6MPS (WIND RWY 14R MID 140/12KT)  WIND RWY 27 TDZ 240/8MPS MAX14 MNM5 END 250/7MPS (WIND RWY 27 TDZ 240/16KT)	
	Runway (O) <sub>2</sub>	RWY nn[L] or RWY nn[C] or RWY nn[R]				
	Runway section (O) <sub>3</sub>	TDZ				
	Wind direction (M)	nnn/	VRB BTN nnn/ AND nnn/ or VRB	C A L M		
	Wind speed (M)	[ABV]n[n][n]MPS (or [ABV]n[n]KT)				
	Significant speed variations (C) <sub>4</sub>	MAX[ABV]nn[n] MNMn[n]				
	Significant directional variations (C) <sub>5</sub>	VRB BTN nnn/ AND nnn/	—	C A L M		
	Runway section (O) <sub>3</sub>	MID				
	Wind direction (O) <sub>3</sub>	nnn/	VRB BTN nnn/ AND nnn/ or VRB			
	Wind speed (O) <sub>3</sub>	[ABV]n[n][n]MPS (or [ABV]n[n]KT)		C A L M		
	Significant speed variations (C) <sub>4</sub>	MAX[ABV]nn[n] MNMn[n]				
	Significant directional variations (C) <sub>5</sub>	VRB BTN nnn/ AND nnn/	—			
	Runway section (O) <sub>3</sub>	END				



Element as specified in Chapter 4	Detailed content	Template(s)		Examples
	Wind direction (O) <sub>3</sub>	nnn/	VRB BTN nnn/ AND nnn/ or VRB	MAX28 MNM10 END 250/14KT)
	Wind speed (O) <sub>3</sub>	[ABV]n[n][n]MPS (or [ABV]n[n]KT)		
	Significant speed variations (C) <sub>4</sub>	MAX[ABV]nn[n] MNMn[n]		
	Significant directional variations (C) <sub>5</sub>	VRB BTN nnn/ AND nnn/	—	
Visibility (M)	Name of the element (M)	VIS		VIS 350M CAVOK VIS 7KM VIS 10KM VIS RWY 09 TDZ 800M END 1200M VIS RWY 18C TDZ 6KM RWY 27 TDZ 4000M
	Runway (O) <sub>2</sub>	RWY nn[L] or RWY nn[C] or RWY nn[R]		
	Runway section (O) <sub>3</sub>	TDZ		
	Visibility (M)	n[n][n][n]M or n[n]KM		
	Runway section (O) <sub>3</sub>	MID		
	Visibility (O) <sub>3</sub>	n[n][n][n]M or n[n]KM		
	Runway section (O) <sub>3</sub>	END		
	Visibility (O) <sub>3</sub>	n[n][n][n]M or n[n]KM		
Runway visual range (C) <sub>6</sub>	Name of the element (M)	RVR		RVR RWY 32 400M RVR RWY 20 1600M RVR RWY 10L BLW 50M RVR RWY 14 ABV 2000M RVR RWY 10 BLW 150M RVR RWY 12 ABV 1200M RVR RWY 12 TDZ 1100M MID ABV 1400M RVR RWY 16 TDZ 600M MID 500M END 400M RVR RWY 26 500M RWY 20 800M
	Runway (C) <sub>7</sub>	RWY nn[L] or RWY nn[C] or RWY nn[R]		
	Runway section (C) <sub>8</sub>	TDZ		
	Runway visual range (M)	[ABV or BLW] nn[n][n]M		
	Runway section (C) <sub>8</sub>	MID		
	Runway visual range (C) <sub>8</sub>	[ABV or BLW] nn[n][n]M		
	Runway section (C) <sub>8</sub>	END		
	Runway visual range (C) <sub>8</sub>	[ABV or BLW] nn[n][n]M		
Present weather (C) <sub>9, 10</sub>	Intensity of present weather (C) <sub>9</sub>	FBL or MOD or HVY	—	MOD RA HVY TSRA HVY DZ FBL SN HZ FG VA MIFG  HVY TSRASN FBL SNRA  FBL DZ FG HVY SHSN BLSN  HVY TSUP  //
	Characteristics and type of present weather (C) <sub>9, 11</sub>	DZ or RA or SN or SG or PL or DS or SS or FZDZ or FZUP <sub>12</sub> or FC <sub>13</sub> or FZRA or SHGR or SHGS or SHRA or SHSN or SHUP <sub>12</sub> or TSGR or TSGS or TSRA or TSSN or TSUP <sub>12</sub> or UP <sub>12</sub>	FG or BR or SA or DU or HZ or FU or VA or SQ or PO or TS or BCFG or BLDU or BLSA or BLSN or DRDU or DRSA or DRSN or FZFG or MIFG or PRFG or // <sub>12</sub>	



Element as specified in Chapter 4	Detailed content	Template(s)			Examples
Cloud (M) <sup>14</sup>	Name of the element (M)	CLD			CLD NSC CLD SCT 300M OVC 600M (CLD SCT 1000FT OVC 2000FT)  CLD OBSC VER VIS 150M (CLD OBSC VER VIS 500FT) CLD BKN TCU 270M (CLD BKN TCU 900FT) CLD RWY 08R BKN 60M RWY 26 BKN 90M (CLD RWY 08R BKN 200FT RWY 26 BKN 300FT) CLD /// CB ///M (CLD /// CB ///FT) CLD /// CB 400M (CLD /// CB 1200FT) CLD NCD
	Runway (O) <sub>2</sub>	RWY nn[L] or RWY nn[C] or RWY nn[R]			
	Cloud amount (M) or vertical visibility (O) <sub>9</sub>	FEW or SCT or BKN or OVC or //1 <sub>2</sub>	OBSC	NSC or NCD <sub>12</sub>	
	Cloud type (C) <sub>9</sub>	CB or TCU or //1 <sub>2</sub>	—		
	Height of cloud base or the value of vertical visibility (C) <sub>9</sub>	n[n][n][n]M (or n[n][n][n]FT) or //M (or //FT) <sub>12</sub>	VER VIS n[n][n]M (or VER VIS n[n][n][n]FT) or VER VIS //M (or VER VIS //FT) <sub>12</sub>		
Air temperature (M)	Name of the element (M)	T			T17
	Air temperature (M)	[MS]nn			TMS08
Dew-point temperature (M)	Name of the element (M)	DP			DP15
	Dew-point temperature (M)	[MS]nn			DPMS18
Pressure values (M)	Name of the element (M)	QNH			QNH 0995HPA
	QNH (M)	nnnnHPA			QNH 1009HPA
	Name of the element (O)	QFE			QNH 1022HPA QFE 1001HPA
	QFE (O)	[RWY nn[L] or RWY nn[C] or RWY nn[R]] nnnnHPA [RWY nn[L] or RWY nn[C] or RWY nn[R]] nnnnHPA]			QNH 0987HPA QFE RWY 18 0956HPA RWY 24 0955HPA
Supplementary information (C) <sub>9</sub>	Significant meteorological phenomena (C) <sub>9</sub>	CB or TS or MOD TURB or SEV TURB or WS or GR or SEV SQL or MOD ICE or SEV ICE or FZDZ or FZRA or SEV MTW or SS or DS or BLSN or FC <sub>15</sub>			FC IN APCH WS IN APCH 60M-WIND 360/13MPS WS RWY 12
	Location of the phenomena (C) <sub>9</sub>	IN APCH [n][n][n]M-WIND nnn/n[n]MPS] or IN CLIMB-OUT [n][n][n]M-WIND nnn/n[n]MPS] (IN APCH [n][n][n]FT-WIND nnn/n[n]KT) or IN CLIMB-OUT [n][n][n]FT-WIND nnn/n[n]KT) or RWY nn[L] or RWY nn[C] or RWY nn[R]			REFZRA CB IN CLIMB-OUT RETSRA
	Recent weather (C) <sub>9, 10</sub>	RERASN or REFZDZ or REFZRA or REDZ or RE[SH]RA or RE[SH]SN or RESG or RESHGR or RESHGS or REBLSN or RESS or REDS or RETSRA or RETSSN or RETSGR or RETSGS or REFC or REPL or REUP <sub>12</sub> or REFZUP <sub>12</sub> or RETSUP <sub>12</sub> or RESHUP <sub>12</sub> or REVA or RETS			
Trend forecast (O) <sub>16</sub>	Name of the element (M)	TREND			TREND NOSIG TREND BECMG FEW 600M (TREND BECMG FEW 2000FT)
	Change indicator (M) <sub>17</sub>	NOSIG	BECMG or TEMPO		
	Period of change (C) <sub>9</sub>		FMnnnn and/or TLnnnn or ATnnnn		TREND TEMPO 250/18 MPS MAX25 (TREND TEMPO 250/36KT MAX50)
	Wind (C) <sub>9</sub>		nnn/[ABV]n[n][n]MPS [MAX[ABV]nn[n]] (or nnn/[ABV]n[n]KT [MAX[ABV]nn])		
	Visibility (C) <sub>9</sub>		VIS n[n][n][n]M or VIS n[n]KM		TREND BECMG AT1800 VIS 10KM NSW TREND BECMG TL1700 VIS 800M FG TREND BECMG FM1030 TL1130 CAVOK
	Weather phenomenon: intensity (C) <sub>9</sub>		FBL or MOD or HVY	—	NSW

Element as specified in Chapter 4	Detailed content	Template(s)			Examples	
	Weather phenomenon: characteristics and type (C) <sup>9, 10, 11</sup>		DZ or RA or SN or SG or PL or DS or SS or FZDZ or FZRA or SHGR or SHGS or SHRA or SHSN or TSGR or TSGS or TSRA or TSSN	FG or BR or SA or DU or HZ or FU or VA or SQ or PO or FC or TS or BCFG or BLDU or BLSA or BLSN or DRDU or DRSA or DRSN or FZFG or MIFG or PRFG		TREND TEMPO FM0300 TL0430 MOD FZRA TREND BECMG FM1900 VIS 500M HVY SNRA TREND BECMG FM1100 MOD SN TEMPO FM1130 BLSN  TREND BECMG AT1130 CLD OVC 300M (TREND BECMG AT1130 CLD OVC 1000FT)  TREND TEMPO TL1530 HVY SHRA CLD BKN CB 360M (TREND TEMPO TL1530 HVY SHRA CLD BKN CB 1200FT)
	Name of the element (C) <sup>9</sup>		CLD			
	Cloud amount and vertical visibility (C) <sup>9,14</sup>		FEW or SCT or BKN or OVC	OBSC	NSC	
	Cloud type (C) <sup>9,14</sup>		CB or TCU	—		
	Height of cloud base or the value of vertical visibility (C) <sup>9,14</sup>		n[n][n][n] M (or n[n][n][n] FT)	[VER VIS n[n][n]M (or VER VIS n[n][n][n] FT)]		

*Notes.—*

- 1) Fictitious location.
- 2) Optional values for one or more runways.
- 3) Optional values for one or more sections of the runway.
- 4) To be included in accordance with 4.1.5.2 c).
- 5) To be included in accordance with 4.1.5.2 b) 1).
- 6) To be included if visibility or runway visual range < 1 500 m.
- 7) To be included in accordance with 4.3.6.4 d).
- 8) To be included in accordance with 4.3.6.4 c).
- 9) To be included whenever applicable.
- 10) One or more, up to a maximum of three groups, in accordance with 4.4.2.9 a), 4.8.1.1 and Appendix 5, 2.2.4.3.
- 11) Precipitation types listed under 4.4.2.3 a) may be combined in accordance with 4.4.2.9 c) and Appendix 5, 2.2.4.1. Only moderate or heavy precipitation to be indicated in trend forecasts in accordance with Appendix 5, 2.2.4.1.
- 12) For automated reports only.
- 13) Heavy used to indicate tornado or waterspout; moderate used to indicate funnel cloud not reaching the ground.
- 14) Up to four cloud layers in accordance with 4.5.4.3 e).
- 15) Abbreviated plain language may be used in accordance with 4.8.1.2.
- 16) To be included in accordance with Chapter 6, 6.3.2.
- 17) Number of change indicators to be kept to a minimum in accordance with Appendix 5, 2.2.1, normally not exceeding three groups.

**Table A3-2: Template for METAR and SPECI**

Key : M = inclusion mandatory, part of every message;  
 C = inclusion conditional, dependent on meteorological conditions or method of observation;  
 O = inclusion optional.

*Note 1.— The ranges and resolutions for the numerical elements included in METAR and SPECI are shown in Table A3-5 of this appendix.*

*Note 2.— The explanations for the abbreviations can be found in the PANS-ABC (ICAO Doc 8400)*

Element as specified in Chapter 4	Detailed content	Template(s)		Examples	
Identification of the type of report (M)	Type of report (M)	METAR, METAR COR, SPECI or SPECI COR		METAR METAR COR SPECI	
Location indicator (M)	ICAO location indicator (M)	nnnn		YUDO:	
Time of the observation (M)	Day and actual time of the observation in UTC (M)	nnnnnZ		221630Z	
Identification of an automated or missing report (C) <sub>2</sub>	Automated or missing report identifier (C)	AUTO or NIL		AUTO NIL	
END OF METAR IF THE REPORT IS MISSING.					
Surface wind (M)	Wind direction (M)	Nnn or /// <sup>12</sup>	VRB	24004MPS VRB01MPS ///10MPS	
	Wind speed (M)	[P]nn[n] or // <sup>12</sup>		(24008KT) (VRB02KT) 240//KT 19006MPS ////KT (19012KT) 00000MPS (00000KT) 140P49MPS (140P99KT)	
	Significant speed variations (C) <sub>3</sub>	G[P]nn[n]		12003G09MPS (12006G18KT)	
	Units of measurement (M)	MPS (or KT)		24008G14MPS (24016G28KT)	
	Significant directional variations (C) <sub>4</sub>	nnnVnnn	—	02005MPS 350V070 (02010KT 350V070)	
Visibility (M)	Prevailing or minimum visibility (M) <sub>5</sub>	Nnnn or /// <sup>12</sup>	C A V O K	0350    ///    CAVOK	
	Minimum visibility and direction of the minimum visibility (C) <sub>6</sub>	nnnn[N] or nnnn[NE] or nnnn[E] or nnnn[SE] or nnnn[S] or nnnn[SW] or nnnn[W] or nnnn[NW]		7000 9999 0800 2000 1200NW 6000 2800E 6000 2800	
Runway visual range (C) <sub>7</sub>	Name of the element (M)	R			R32/0400
	Runway (M)	nn[L]/or nn[C]/or nn[R]/			R12R/1700 R10/M0050 R14L/P2000
	Runway visual range (M)	[P or M]nnnn or /// <sup>12</sup>			R16L/0650 R16C/0500 R16L///// R10/////
	Runway visual range past tendency (C) <sub>8</sub>	U, D or N		R16R/0450 R17L/0450 R12/1100U R26/0550N R20/0800D R12/0700	



Element as specified in Chapter 4	Detailed content	Template(s)			Examples
Present weather (C) <sub>2,9</sub>	Intensity or proximity of present weather (C) <sub>10</sub>	- or +	—	VC	
	Characteristics and type of present weather (M) <sub>11</sub>	DZ or RA or SN or SG or PL or DS or SS or FZDZ or FZRA or FZUP <sub>12</sub> or FC <sub>13</sub> or SHGR or SHGS or SHRA or SHSN or SHUP <sub>12</sub> or TSGR or TSGS or TSRA or TSSN or TSUP <sub>12</sub> or UP <sub>12</sub>	FG or BR or SA or DU or HZ or FU or VA or SQ or PO or TS or BCFG or BLDU or BLSA or BLSN or DRDU or DRSA or DRSN or FZFG or MIFG or PRFG or // <sub>12</sub>	FG or PO or FC or DS or SS or TS or SH or BLSN or BLSA or BLDU or VA	RA HZ VCFG +TSRA FG VCSH +DZ VA VCTS -SN MIFG VCBLSA  +TSRASN -SNRA  DZ FG +SHSN BLSN UP FZUP TSUP FZUP  //
Cloud (M) <sub>14</sub>	Cloud amount and height of cloud base or vertical visibility (M)	FEWnnn or SCTnnn or BKNnnn or OVCnnn or FEW// <sub>12</sub> or SCT// <sub>12</sub> or BKN// <sub>12</sub> or OVC// <sub>12</sub> or ///nnn <sub>12</sub> or //// <sub>12</sub>	VVnnn or VV// <sub>12</sub>	NSC or NCD <sub>12</sub>	FEW015 VV005 OVC030 VV// NSC  SCT010 OVC020  BKN// //015
	Cloud type (C) <sub>2</sub>	CB or TCU or // <sub>12</sub>	—		BKN009TCU NCD  SCT008 BKN025CB BKN025// ////CB  //////// BKN//TCU
Air and dew-point temperature (M)	Air and dew-point temperature (M)	[M]nn/[M]nn or // [M]nn <sup>12</sup> or [M]nn// <sup>12</sup> or //// <sup>12</sup>			17/10 //10 17// //// 02/M08 M01/M10
Pressure values (M)	Name of the element (M)	Q			Q0995 Q1009
	QNH (M)	nnnn or // <sup>12</sup>			Q1022 Q// Q0987
Supplementary information (C)	Recent weather (C) <sub>2,9</sub>	RERASN or REFZDZ or REFZRA or REDZ or RE[SH]RA or RE[SH]SN or RESG or RESHGR or RESHGS or REBLSN or RESS or REDS or RETSRA or RETSSN or RETSGR or RETSGS or RETS or REFC or REVA or REPL or REUP <sub>12</sub> or REFZUP <sub>12</sub> or RETSUP <sub>12</sub> or RESHUP <sub>12</sub> or RE// <sub>12</sub>			REFZRA RETSRA
	Wind shear (C) <sub>2</sub>	WS Rnn[L] or WS Rnn[C] or WS Rnn[R] or WS ALL RWY			WS R03 WS ALL RWY WS R18C
	Sea-surface temperature and state of the sea or significant wave height (C) <sub>15</sub>	W[M]nn/Sn or W//Sn or W[M]nn/S/ or W[M]nn/Hn[n][n] or W//Hn[n][n] or W[M]nn/H//			W15/S2 W12/H75 W//S3 WM01/S/ W//H104 W17/H// W//H// W//S/

Element as specified in Chapter 4	Detailed content	Template(s)				Examples	
Trend forecast (O) <sup>17</sup>	Change indicator (M) <sup>18</sup>	NOSIG	BECMG or TEMPO			NOSIG BECMG FEW020  TEMPO 25018G25MPS (TEMPO 25036G50KT)  BECMG FM1030 TL1130 CAVOK  BECMG TL1700 0800 FG  BECMG AT1800 9000 NSW  BECMG FM1900 0500 +SNRA  BECMG FM1100 SN TEMPO FM1130 BLSN  TEMPO FM0330 TL0430 FZRA TEMPO TL1200 0600 BECMG AT1200 8000 NSW NSC  BECMG AT1130 OVC010  TEMPO TL1530 +SHRA BKN012CB	
	Period of change (C) <sup>2</sup>		FMnnnn and/or TLnnnn or ATnnnn				
	Wind (C) <sup>2</sup>		nnn[P]nn[n][G[P]nn[n]]MPS (or nnn[P]nn[G[P]nn]KT)				
	Prevailing visibility (C) <sup>2</sup>		nnnn				
	Weather phenomenon: intensity (C) <sup>10</sup>		- or +	—	N S V O K		W
	Weather phenomenon: characteristics and type (C) <sup>2, 9, 11</sup>		DZ or RA or SN or SG or PL or DS or SS or FZDZ or FZRA or SHGR or SHGS or SHRA or SHSN or TSGR or TSGS or TSRA or TSSN	FG or BR or SA or DU or HZ or FU or VA or SQ or PO or FC or TS or BCFG or BLDU or BLSA or BLSN or DRDU or DRSA or DRSN or FZFG or MIFG or PRFG	N S C		
	Cloud amount and height of cloud base or vertical visibility (C) <sup>2, 14</sup>		FEWnnn or SCTnnn or BKNnnn or OVCnnn	VVnnn or VV///	N S C		
Cloud type (C) <sup>2, 14</sup>	CB or TCU	—					

*Notes.—*

- 1) Fictitious location.
- 2) To be included whenever applicable.
- 3) To be included in accordance with 4.1.5.2 c).
- 4) To be included in accordance with 4.1.5.2 b) 1).
- 5) To be included in accordance with 4.2.4.4 b).
- 6) To be included in accordance with 4.2.4.4 a).
- 7) To be included if visibility or runway visual range < 1 500 m; for up to a maximum of four runways in accordance with 4.3.6.5 b).
- 8) To be included in accordance with 4.3.6.6.
- 9) One or more, up to a maximum of three groups, in accordance with 4.4.2.9 a), 4.8.1.1 and Appendix 5, 2.2.4.1.
- 10) To be included whenever applicable; no qualifier for *moderate* intensity in accordance with 4.4.2.8.
- 11) Precipitation types listed under 4.4.2.3 a) may be combined in accordance with 4.4.2.9 c) and Appendix 5, 2.2.4.1. Only moderate or heavy precipitation to be indicated in trend forecasts in accordance with Appendix 5, 2.2.4.1.
- 12) When a meteorological element is temporarily missing, or its value considered temporarily as incorrect, it is by “/” for each digit of the abbreviation of the text message and indicated as missing for its IWXXM version
- 13) Heavy used to indicate tornado or waterspout; moderate (no qualifier) to indicate funnel cloud not reaching the ground.
- 14) Up to four cloud layers in accordance with 4.5.4.3 e).
- 15) To be included in accordance with 4.8.1.5 a).
- 16) To be included in accordance with Chapter 6, 6.3.2.
- 17) Number of change indicators to be kept to a minimum in accordance with Appendix 5, 2.2.1, normally not exceeding three groups.

**Table A3-3. Use of change indicators in trend forecasts**

<i>Change indicator</i>	<i>Time indicator and period</i>	<i>Meaning</i>	
NOSIG	—	no significant changes are forecast	
BECMG	FMn <sub>1</sub> n <sub>1</sub> n <sub>1</sub> n <sub>1</sub> TLn <sub>2</sub> n <sub>2</sub> n <sub>2</sub> n <sub>2</sub>	the change is forecast to	commence at n <sub>1</sub> n <sub>1</sub> n <sub>1</sub> n <sub>1</sub> UTC and be completed by n <sub>2</sub> n <sub>2</sub> n <sub>2</sub> n <sub>2</sub> UTC
	TLnnnn		commence at the beginning of the trend forecast period and be completed by nnnn UTC
	FMnnnn		commence at nnnn UTC and be completed by the end of the trend forecast period
	ATnnnn		occur at nnnn UTC (specified time)
	—		a) commence at the beginning of the trend forecast period and be completed by the end of the trend forecast period; or b) the time is uncertain
TEMPO	FMn <sub>1</sub> n <sub>1</sub> n <sub>1</sub> n <sub>1</sub> TLn <sub>2</sub> n <sub>2</sub> n <sub>2</sub> n <sub>2</sub>	temporary fluctuations are forecast to	commence at n <sub>1</sub> n <sub>1</sub> n <sub>1</sub> n <sub>1</sub> UTC and cease by n <sub>2</sub> n <sub>2</sub> n <sub>2</sub> n <sub>2</sub> UTC
	TLnnnn		commence at the beginning of the trend forecast period and cease by nnnn UTC
	FMnnnn		commence at nnnn UTC and cease by the end of the trend forecast period
	—		commence at the beginning of the trend forecast period and cease by the end of the trend forecast period

**Table A3-4. Ranges and resolutions for the numerical elements included in local reports.**

<i>Element as specified in Chapter 4</i>		<i>Range</i>	<i>Resolution</i>
Runway:	(no units)	01 – 36	1
Wind direction:	°true	010 – 360	10
Wind speed:	MPS	1 – 99*	1
	KT	1 – 199*	1
Visibility:	M	0 – 750	50
	M	800 – 4 900	100
	KM	5 – 9	1
	KM	10 –	0 (fixed value: 10 KM)
Runway visual range:	M	0 – 375	25
	M	400 – 750	50
	M	800 – 2 000	100
Vertical visibility:	M	0 – 75**	15
	M	90 – 600	30
	FT	0 – 250**	50
	FT	300 – 2 000	100
Clouds: height of cloud base:	M	0 – 75**	15
	M	90 – 3 000	30
	FT	0 – 250**	50
	FT	300 – 10 000	100
Air temperature; Dew-point temperature:	°C	–80 – +60	1
QNH; QFE:	hPa	0500 – 1 100	1
<p>*There is no aeronautical requirement to report surface wind speeds of 50 m/s (100 kt) or more; however, provision has been made for reporting wind speeds up to 99 m/s (199 kt) for non-aeronautical purposes, as necessary.</p> <p>** Under circumstances as specified in 4.5.4.2; otherwise a resolution of 30 m (100 ft) is to be used.</p>			

**Table A 3-5. Ranges and resolutions for the numerical elements included in METAR and SPECI**

<i>Element as specified in Chapter 4</i>		<i>Range</i>	<i>Resolution</i>	
Runway:	(no units)	01 – 36	1	
Wind direction:	°true	000 – 360	10	
Wind speed:	MPS	00 – 99*	1	
	KT	00 – 199*	1	
Visibility:	M	0000 – 0750	50	
	M	0800 – 4 900	100	
	M	5 000 – 9 000	1 000	
	M	10 000 –	0 (fixed value: 9 999)	
Runway visual range:	M	0000 – 0375	25	
	M	0400 – 0750	50	
	M	0800 – 2 000	100	
Vertical visibility:	30's M (100's FT)	000 – 020	1	
Clouds: height of cloud base:	30's M (100's FT)	000 – 100	1	
Air temperature; Dew-point temperature:	°C	–80 – +60	1	
QNH:	hPa	0850 – 1 100	1	
Sea-surface temperature:	°C	–10 – +40	1	
State of the sea:	(no units)	0 – 9	1	
Significant wave height:	M	0 – 999	0.1	
State of the runway	Runway designator:	(no units)	01 – 36; 88; 99	1
	Runway deposits:	(no units)	0 – 9	1
	Extent of runway contamination:	(no units)	1; 2; 5; 9	—
	Depth of deposit:	(no units)	00 – 90; 92 – 99	1
	Friction coefficient/braking action:	(no units)	00 – 95; 99	1
* There is no aeronautical requirement to report surface wind speeds of 50 m/s (100 kt) or more; however, provision has been made for reporting wind speeds up to 99 m/s (199 kt) for non-aeronautical purposes, as necessary.				

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 29

### Example A3-1. Routine report

a) *Local routine report (same location and weather conditions as METAR):*

MET REPORT YUDO 221630Z WIND 240/4MPS VIS 600M RVR RWY 12 TDZ 1000M MOD DZ FG CLD SCT 300M OVC 600M T17 DP16 QNH 1018HPA TREND BECMG TL1700 VIS 800M FG BECMG AT1800 VIS 10KM NSW

b) *METAR for YUDO (Donlon/International)\*:*

METAR YUDO 221630Z 24004MPS 0600 R12/1000U DZ FG SCT010 OVC020 17/16 Q1018 BECMG TL1700 0800 FG BECMG AT1800 9999 NSW

*Meaning of both reports:*

Routine report for Donlon/International\* issued on the 22nd of the month at 1630 UTC; surface wind direction 240 degrees; wind speed 4 metres per second; visibility (along the runway(s) in the local routine report; prevailing visibility in METAR) 600 metres; runway visual range representative of the touchdown zone for runway 12 is 1000 metres and the runway visual range values have shown an upward tendency during previous 10 minutes (runway visual range tendency to be included in METAR only); and moderate drizzle and fog; scattered cloud at 300 metres; overcast at 600 metres; air temperature 17 degrees Celsius; dew-point temperature 16 degrees Celsius; QNH 1 018 hectopascals; trend during next 2 hours, visibility (along the runway(s) in the local routine report; prevailing visibility in METAR) becoming 800 metres in fog by 1700 UTC; at 1800 UTC visibility (along the runway(s) in the local routine report; prevailing visibility in METAR) becoming 10 kilometres or more and nil significant weather.

\* Fictitious location

*Note.— In this example, the primary units “metre per second” and “metre” were used for wind speed and height of cloud base, respectively. However, in accordance with BCAR-5, the corresponding non-SI alternative units “knot” and “foot” may be used instead.*

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Meteorological Observations and Reports	APP 3	Page: 30

### Example A3-2. Special report

a) *Local special report (same location and weather conditions as SPECI):*

SPECIAL YUDO 151115Z WIND 050/25KT MAX37 MNM10 VIS 1200M RVR RWY 05 ABV 1800M HVY TSRA CLD BKN CB 500FT T25 DP22 QNH 1008HPA TREND TEMPO TL1200 VIS 600M BECMG AT1200 VIS 8KM NSW NSC

b) *SPECI for YUDO (Donlon/International)\*:*

SPECI YUDO 151115Z 05025G37KT 3000 1200NE+TSRA BKN005CB 25/22 Q1008 TEMPO TL1200 0600 BECMG AT1200 8000 NSW NSC

*Meaning of both reports:*

Special report for Donlon/International\* issued on the 15th of the month at 1115 UTC; surface wind direction 050 degrees; wind speed 25 knots gusting between 10 and 37 knots (minimum wind speed not to be included in SPECI) visibility 1 200 metres (along the runway(s) in the local special report); prevailing visibility 3 000 metres (in SPECI) with minimum visibility 1 200 metres to north east (directional variations to be included in SPECI only); runway visual range above 1 800 metres on runway 05 (runway visual range not required in SPECI with prevailing visibility of 3 000 metres); thunderstorm with heavy rain; broken cumulonimbus cloud at 500 feet; air temperature 25 degrees Celsius; dew-point temperature 22 degrees Celsius; QNH 1 008 hectopascals; trend during next 2 hours, visibility (along the runway(s) in the local special report; prevailing visibility in SPECI) temporarily 600 metres from 1115 to 1200, becoming at 1200 UTC visibility (along the runway(s) in the local special report; prevailing visibility in SPECI) 8 kilometres, thunderstorm ceases and nil significant weather and nil significant cloud.

\* Fictitious location

*Note.— In this example, the non-SI alternative units “knot” and “foot” were used for wind speed and height of cloud base, respectively. However, in accordance with BCAR-5, the corresponding primary units “metres per second” and “metre” may be used instead.*

### Example A3-3. Volcanic activity report

VOLCANIC ACTIVITY REPORT YUSB\* 231500 MT TROJEEN\* VOLCANO N5605 W12652 ERUPTED 231445 LARGE ASH CLOUD EXTENDING TO APPROX 30000 FEET MOVING SW

Meaning:

Volcanic activity report issued by Siby/Bistock meteorological station at 1500 UTC on the 23rd of the month. Mt. Trojeen volcano 56 degrees 5 minutes north 126 degrees 52 minutes west erupted at 1445 UTC on the 23rd; a large ash cloud was observed extending to approximately 30 000 feet and moving in a south-westerly direction.

\* Fictitious location

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Aircraft Observations and Reports	APP 4	Page: 1

## APPENDIX 4. TECHNICAL SPECIFICATIONS RELATED TO AIRCRAFT OBSERVATIONS AND REPORTS

*(See Chapter 5 of this document.)*

### 1. CONTENTS OF AIR-REPORTS

#### 1.1 Routine air-reports by air-ground data link

1.1.1 When air-ground data link is used and automatic dependent surveillance — (ADS-C) or SSR Mode S is being applied, the elements contained in routine air-reports shall be:

Message type designator  
Aircraft identification

Data block 1  
Latitude  
Longitude  
Level  
Time

Data block 2  
Wind direction  
Wind speed  
Wind quality flag  
Air temperature  
Turbulence (if available)  
Humidity (if available)

*Note.— When ADS-C or SSR Mode S is being applied, the requirements of routine air-reports may be met by the combination of the basic ADS-C/SSR Mode S data block (data block 1) and the meteorological information data block (data block 2), available from ADS-C or SSR Mode S reports. The ADS-C message format is specified in the PANS-ATM (ICAO Doc 4444), 4.11.4 and Chapter 13 and the SSR Mode S message format is specified in BCAR - 10, Volume III, Part I, Chapter 5.*

1.1.2 When air-ground data link is used while ADS-C and SSR Mode S are not being applied, the elements contained in routine reports shall be:

Message type designator

Section 1 (Position information)  
Aircraft identification  
Position or latitude and longitude  
Time  
Flight level or altitude  
Next position and time over  
Ensuing significant point

Section 2 (Operational information)  
Estimated time of arrival  
Endurance

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Aircraft Observations and Reports	APP 4	Page: 2

Section 3 (Meteorological information)

- Air temperature
- Wind direction
- Wind speed
- Turbulence
- Aircraft icing
- Humidity (if available)

*Note.— When air-ground data link is used while ADS-C and SSR Mode S are not being applied, the requirements of routine air-reports may be met by the controller-pilot data link communication (CPDLC) application entitled “Position report”. The details of this data link application are specified in the Manual of Air Traffic Services Data Link Applications (ICAO Doc 9694) and in BCAR - 10, Volume III, Part I.*

### 1.2 Special air-reports by air-ground data link

When air-ground data link is used, the elements contained in special air-reports shall be:

Message type designator  
Aircraft identification

Data block 1

- Latitude
- Longitude
- Level
- Time

Data block 2

- Wind direction
- Wind speed
- Wind quality flag
- Air temperature
- Turbulence (if available)
- Humidity (if available)

Data block 3

Condition prompting the issuance of a special air-report (one condition to be selected from the list presented in Table A4-1).

*Note 1.— The requirements of special air -reports may be met by the data link flight information service (D-FIS) application entitled “Special air-report service”. The details of this data link application are specified in ICAO Doc 9694.*

### 1.3 Special air-reports by voice communications

When voice communications are used, the elements contained in special air-reports shall be:

Message type designator

Section 1 (Position information)

- Aircraft identification
- Position or latitude and longitude

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Technical Specifications related to Aircraft Observations and Reports	APP 4	Page: 3

Time  
Level or range of levels

Section 3 (Meteorological information)

Condition prompting the issuance of a special air-report, to be selected from the list presented in Table A4-1

*Note 1.— Air-reports are considered routine by default. The message type designator for special air-reports is specified in the PANS-ATM (ICAO Doc 4444), Appendix 1.*

## 2. CRITERIA FOR REPORTING

### 2.1 General

When air-ground data link is used, the wind direction, wind speed, wind quality flag, air temperature, turbulence and humidity included in air-reports shall be reported in accordance with the following criteria.

### 2.2 Wind direction

The wind direction shall be reported in terms of degrees true, rounded to the nearest whole degree.

### 2.3 Wind speed

The wind speed shall be reported in metres per second or knots, rounded to the nearest 1 m/s (1 knot). The units of measurement used for the wind speed shall be indicated.

### 2.4 Wind quality flag

The wind quality flag shall be reported as 0 when the roll angle is less than 5 degrees and as 1 when the roll angle is 5 degrees or more.

### 2.5 Air temperature

The air temperature shall be reported to the nearest tenth of a degree Celsius.

### 2.6 Turbulence

The turbulence shall be reported in terms of the eddy dissipation rate (EDR).

*Note.— The EDR is an aircraft-independent measure of turbulence. However, the relationship between the EDR value and the perception of turbulence is a function of aircraft type, and the mass, altitude, configuration and airspeed of the aircraft. The EDR values given below describe the severity levels for a medium-sized transport aircraft under typical en-route conditions (i.e. altitude, airspeed and weight).*

#### 2.6.1 Routine air-reports

The turbulence shall be reported during the en-route phase of the flight and shall refer to the 15-minute period immediately preceding the observation. Both the average and peak value of turbulence, together with the time of occurrence of the peak value to the nearest minute, shall be observed. The average and peak values shall be reported in terms of the cube root of EDR. The time of occurrence of the peak value shall be reported as

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Aircraft Observations and Reports	APP 4	Page: 4

indicated in Table A4-2. The turbulence shall be reported during the climb-out phase for the first 10 minutes of the flight and shall refer to the 30-second period immediately preceding the observation. The peak value of turbulence shall be observed.

### 2.6.2 Interpretation of the turbulence report

Turbulence shall be considered:

- a) severe when the peak value of EDR equals or exceeds 0.45;
- b) moderate when the peak value of EDR is equal to or above 0.20 and below 0.45;
- c) light when the peak value of the cube root of EDR is above 0.1 and below 0.20; and
- d) nil when the peak value of EDR is below or equal to 0.1.

### 2.6.3 Special air-reports

Special air-reports on turbulence shall be made during any phase of the flight whenever the peak value of EDR exceeds 0.20. The special air-report on turbulence shall be made with reference to the 1-minute period immediately preceding the observation. Both the average and peak value of turbulence shall be observed. The average and peak values shall be reported in terms of EDR. Special air-reports shall be issued every minute until such time as the peak values of EDR fall below 0.20.

## 2.7 Humidity

The humidity shall be reported as the relative humidity, rounded to the nearest whole percent.

*Note.— The ranges and resolutions for the meteorological elements included in air-reports are shown in Table A4-3.*

## 3. EXCHANGE OF AIR-REPORTS

### 3.1 Responsibilities of the meteorological watch offices

3.1.1 The meteorological watch office shall transmit without delay the special air-reports received by voice communications to the world area forecast centres (WAFCs) and the centres designated by regional air navigation agreement for the operation of aeronautical fixed service Internet-based services.

3.1.2 The meteorological watch office shall transmit without delay special air-reports of pre-eruption volcanic activity, a volcanic eruption or volcanic ash cloud received to the associated volcanic ash advisory centres.

3.1.3 When a special air-report is received at the meteorological watch office but the forecaster considers that the phenomenon causing the report is not expected to persist and, therefore, does not warrant issuance of a SIGMET, the special air-report shall be disseminated in the same way that SIGMET messages are disseminated in accordance with Appendix 6, 1.2.1, i.e. to meteorological watch offices, WAFCs, and other meteorological offices in accordance with regional air navigation agreement.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Aircraft Observations and Reports	APP 4	Page: 5

*Note.— The template used for special air-reports which are uplinked to aircraft in flight is in Appendix 6, Table A6-1B.*

### 3.2 Responsibilities of world area forecast centres

Air-reports received at WAFCs shall be further disseminated as basic meteorological data.

*Note.— The dissemination of basic meteorological data is normally carried out on the World Meteorological Organization (WMO) Global Telecommunication System.*

### 3.3 Supplementary dissemination of air-reports

Where supplementary dissemination of air-reports is required to satisfy special aeronautical or meteorological requirements, such dissemination should be arranged and agreed between the meteorological authorities concerned.

### 3.4 Format of air-reports

Air-reports shall be exchanged in the format in which they are received.

## 4. SPECIFIC PROVISIONS RELATED TO REPORTING WIND SHEAR AND VOLCANIC ASH

### 4.1 Reporting of wind shear

4.1.1 When reporting aircraft observations of wind shear encountered during the climb-out and approach phases of flight, the aircraft type should be included.

4.1.2 Where wind shear conditions in the climb-out or approach phases of flight were reported or forecast but not encountered, the pilot-in-command should advise the appropriate air traffic services unit as soon as practicable unless the pilot-in-command is aware that the appropriate air traffic services unit has already been so advised by a preceding aircraft.

### 4.2 Post-flight reporting of volcanic activity

*Note.— The detailed instructions for recording and reporting volcanic activity observations are given in the PANS-ATM (ICAO Doc 4444), Appendix 1.*

4.2.1 On arrival of a flight at an aerodrome, the completed report of volcanic activity shall be delivered by the operator or a flight crew member, without delay, to the aerodrome meteorological office, or if such office is not easily accessible to arriving flight crew members, the completed form shall be dealt with in accordance with local arrangements made by the MET service provider and the operator.

4.2.2 The completed report of volcanic activity received by an aerodrome meteorological office shall be transmitted without delay to the meteorological watch office responsible for the provision of meteorological watch for the flight information region in which the volcanic activity was observed.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

**Table A4-1. Template for the special air-report (downlink)**

Key: M = inclusion mandatory, part of every message;  
 C = inclusion conditional; included whenever available.

Note.— Message to be prompted by the pilot-in-command. Currently only the condition “SEV TURB” can be automated (see 2.6.3).

Element as specified in Chapter 5	Detailed content	Template(s)	Examples
Message type designator (M)	Type of air-report (M)	ARS	ARS
Aircraft identification (M)	Aircraft radiotelephony call sign (M)	nnnnnn	VA812
DATA BLOCK 1			
Latitude (M)	Latitude in degrees and minutes (M)	Nnnnn or Snnnn	S4506
Longitude (M)	Longitude in degrees and minutes (M)	Wnnnnn or Ennnnn	E01056
Level (M)	Flight level (M)	FLnnn or FLnnn to FLnnn	FL330 FL280 to FL310
Time (M)	Time of occurrence in hours and minutes (M)	OBS AT nnnnZ	OBS AT 1216Z
DATA BLOCK 2			
Wind direction (M)	Wind direction in degrees true (M)	nnn/	262/
Wind speed (M)	Wind speed in metres per second (or knots) (M)	nnnMPS (or nnnKT)	040MPS (080KT)
Wind quality flag (M)	Wind quality flag (M)	n	1
Air temperature (M)	Air temperature in tenths of degrees C (M)	T[M]nnn	T127 TM455
Turbulence (C)	Turbulence in hundredths of $m_{2/3} s^{-1}$ and the time of occurrence of the peak value (C) <sup>1</sup>	EDRnnn/hn	EDR064/08
Humidity (C)	Relative humidity in per cent (C)	RHnnn	RH054
DATA BLOCK 3			
Condition prompting the issuance of a special air-report (M)		SEV TURB [EDRnnn] <sub>2</sub> or SEV ICE or SEV MTW or TS GR <sub>3</sub> or TS <sub>3</sub> or HVY DS <sub>4</sub> or HVY SS <sub>4</sub> or VA CLD [FLnnn/nnn] or VA <sub>5</sub> [MT nnnnnnnnnnnnnnnnnnn] or MOD TURB [EDRnnn] <sub>2</sub> or MOD ICE	SEV TURB EDR076 VA CLD FL050/100

Notes.—

1. The time of occurrence to be reported in accordance with Table A4-2.
2. The turbulence to be reported in accordance with 2.6.3.
3. Obscured, embedded or widespread thunderstorms or thunderstorms in squall lines.
4. Duststorm or sandstorm.
5. Pre-eruption volcanic activity or a volcanic eruption.

**Table A4-2. Time of occurrence of the peak value to be reported**

<i>Peak value of turbulence occurring during the one-minute period</i>
------------------------------------------------------------------------



	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specification related to Forecast	APP 5	Page: 1

## APPENDIX 5. TECHNICAL SPECIFICATIONS RELATED TO FORECASTS

(See Chapter 6 of this document.)

### 1. CRITERIA RELATED TO TAF

#### 1.1 TAF format

1.1.1 TAF shall be issued in accordance with the template shown in Table A5 - 1 and disseminated in the TAF code form prescribed by the World Meteorological Organization (WMO).

*Note.— The TAF code form is contained in WMO Publication No. 306, Manual on Codes, Volume I.1, Part A — Alphanumeric Codes.*

1.1.2 TAF shall be disseminated in IWXXM GML form and/or in accordance with 1.1.1.

*Note.— The technical specifications for IWXXM are contained in the Manual on Codes (WMO-No. 306), Volume I.3, Part D — Representation Derived from Data Models. Guidance on the implementation of IWXXM is provided in the Manual on the ICAO Meteorological Information Exchange Model (IWXXM) (ICAO Doc 10003).*

#### 1.2 Inclusion of meteorological elements in TAF

*Note.— Guidance on operationally desirable accuracy of forecasts is given in Attachment B.*

##### 1.2.1 Surface wind

In forecasting surface wind, the expected prevailing direction shall be given. When it is not possible to forecast a prevailing surface wind direction due to its expected variability, for example, during light wind conditions (less than 1.5 m/s (3 kt)) or thunderstorms, the forecast wind direction shall be indicated as variable using “VRB”. When the wind is forecast to be less than 0.5 m/s (1 kt), the forecast wind speed shall be indicated as calm. When the forecast maximum speed (gust) exceeds the forecast mean wind speed by 5 m/s (10 kt) or more, the forecast maximum wind speed shall be indicated. When a wind speed of 50 m/s (100 kt) or more is forecast, it shall be indicated to be more than 49 m/s (99 kt).

##### 1.2.2 Visibility

When the visibility is forecast to be less than 800 m, it should be expressed in steps of 50 m; when it is forecast to be 800 m or more but less than 5 km, in steps of 100 m; 5 km or more but less than 10 km, in kilometre steps; and when it is forecast to be 10 km or more, it should be expressed as 10 km, except when conditions of CAVOK are forecast to apply. The prevailing visibility should be forecast. When visibility is forecast to vary in different directions and the prevailing visibility cannot be forecast, the lowest forecast visibility should be given.

##### 1.2.3 Weather phenomena

One or more, up to a maximum of three, of the following weather phenomena or combinations thereof, together with their characteristics and, where appropriate, intensity, shall be forecast if they are expected to occur at the aerodrome:

— freezing precipitation

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specification related to Forecast	APP 5	Page: 2

- freezing fog
- Moderate or heavy precipitation (including showers thereof)
- Low drifting dust, sand or snow
- blowing dust, sand or snow
- dust storm
- Sandstorm
- Thunderstorm (with or without precipitation)
- squall
- funnel cloud (tornado or waterspout)
- other weather phenomena given in Appendix 3, 4.4.2.3, as agreed between the designated meteorological authority, the appropriate ATS authority and the operators concerned.

The expected end of occurrence of those phenomena shall be indicated by the abbreviation “NSW”.

#### 1.2.4 Cloud

Cloud amount should be forecast using the abbreviations “FEW”, “SCT”, “BKN” or “OVC” as necessary. When it is expected that the sky will remain or become obscured and clouds cannot be forecast and information on vertical visibility is available at the aerodrome, the vertical visibility should be forecast in the form “VV” followed by the forecast value of the vertical visibility. When several layers or masses of cloud are forecast, their amount and height of base should be included in the following order:

- a) the lowest layer or mass regardless of amount, to be forecast as FEW, SCT, BKN or OVC as appropriate;
- b) the next layer or mass covering more than 2/8, to be forecast as SCT, BKN or OVC as appropriate;
- c) the next higher layer or mass covering more than 4/8, to be forecast as BKNr OVC as appropriate; and
- d) Cumulonimbus clouds, whenever forecast and not already included under a) to c).

Cloud information should be limited to cloud of operational significance; when no cloud of operational significance is forecast, and “CAVOK” is not appropriate, the abbreviation “NSC” should be used.

#### 1.2.5 Temperature

When forecast temperatures are included in accordance with regional air navigation agreement, the maximum and minimum temperatures expected to occur during the period of validity of the TAF should be given, together with their corresponding times of occurrence.

### 1.3 Use of change groups

*Note.— Guidance on the use of change and time indicators in TAF is given in Table A5-2.*

1.3.1 The criteria used for the inclusion of change groups in TAF or for the amendment of TAF shall be based on any of the following weather phenomena or combinations thereof being forecast to begin or end or change in intensity:

- freezing fog

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Technical Specification related to Forecast	APP 5	Page: 3

- freezing precipitation
- moderate or heavy precipitation (including showers)
- Thunderstorm
- dust storm
- Sandstorm.

1.3.2 The criteria used for the inclusion of change groups in TAF or for the amendment of TAF should be based on the following:

- a) when the mean surface wind direction is forecast to change by 60° or more, the mean speed before and/or after the change being 5 m/s (10 kt) or more;
- b) when the mean surface wind speed is forecast to change by 5 m/s (10 kt) or more;
- c) when the variation from the mean surface wind speed (gusts) is forecast to change by 5 m/s (10 kt) or more, the mean speed before and/or after the change being 7.5 m/s (15 kt) or more;
- d) when the surface wind is forecast to change through values of operational significance. The threshold values should be established by the MET service provider in consultation with ATS authority and the operators concerned, taking into account changes in the wind which would:
  - 1) require a change in runway(s) in use; and
  - 2) indicate that the runway tailwind and crosswind components will change through values representing the main operating limits for typical aircraft operating at the aerodrome;
- e) when the visibility is forecast to improve and change to or pass through one or more of the following values, or when the visibility is forecast to deteriorate and pass through one or more of the following values:
  - 150, 350, 600, 800, 1 500 or 3 000 m; or
  - 5 000 m in cases where significant numbers of flights are operated in accordance with the visual flight rules;
- f) when any of the following weather phenomena or combinations thereof are forecast to begin or end:
  - low drifting dust, sand or snow
  - blowing dust, sand or snow
  - squall
  - funnel cloud (tornado or waterspout);
- g) when the height of base of the lowest layer or mass of cloud of BKN or OVC extent is forecast to lift and change to or pass through one or more of the following values, or when the height of the lowest layer or mass of cloud of BKN or OVC extent is forecast to lower and pass through one or more of the following values:
  - 1) 30, 60, 150 or 300 m (100, 200, 500 or 1 000 ft); or
  - 2) 450 m (1 500 ft) in cases where significant numbers of flights are operated in accordance with the visual flight rules;
- h) when the amount of a layer or mass of cloud below 450 m (1 500 ft) is forecast to change:

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specification related to Forecast	APP 5	Page: 4

- 1) from NSC, FEW or SCT to BKN or OVC; or
  - 2) from BKN or OVC to NSC, FEW or SCT;
- i) when the vertical visibility is forecast to improve and change to or pass through one or more of the following values, or when the vertical visibility is forecast to deteriorate and pass through one or more of the following values: 30, 60, 150 or 300 m (100, 200, 500 or 1 000 ft); and
  - j) any other criteria based on local aerodrome operating minima, as agreed between the designated MET service provider and the operators concerned.

*Note.— Other criteria based on local aerodrome operating minima are to be considered in parallel with similar criteria for the issuance of SPECI developed in response to Appendix 3, 2.3.3 h).*

1.3.3 When a change in any of the elements given in Chapter 6, 6.2.3 is required to be indicated in accordance with the criteria given in 1.3.2, the change indicators “BECMG” or “TEMPO” should be used followed by the time period during which the change is expected to occur. The time period should be indicated as the beginning and end of the period in whole hours UTC. Only those elements for which a significant change is expected should be included following a change indicator. However, in the case of significant changes in respect of cloud, all cloud groups, including layers or masses not expected to change should be indicated.

1.3.4 The change indicator “BECMG” and the associated time group should be used to describe changes where the meteorological conditions are expected to reach or pass through specified threshold values at a regular or irregular rate and at an unspecified time during the time period. The time period should normally not exceed 2 hours but in any case should not exceed 4 hours.

1.3.5 The change indicator “TEMPO” and the associated time group should be used to describe expected frequent or infrequent temporary fluctuations in the meteorological conditions which reach or pass specified threshold values and last for a period of less than one hour in each instance and, in the aggregate, cover less than one-half of the forecast period during which the fluctuations are expected to occur. If the temporary fluctuation is expected to last one hour or longer, the change group “BECMG” should be used in accordance with 1.3.4 or the validity period should be subdivided in accordance with 1.3.6.

1.3.6 Where one set of prevailing weather conditions is expected to change significantly and more or less completely to a different set of conditions, the period of validity should be subdivided into self-contained periods using the abbreviation “FM” followed immediately by a six-figure time group in days, hours and minutes UTC indicating the time the change is expected to occur. The subdivided period following the abbreviation “FM” should be self-contained and all forecast conditions given before the abbreviation should be superseded by those following the abbreviation.

#### **1.4 Use of probability groups**

It is recommended that the probability of occurrence of an alternative value of a forecast element or elements should be indicated, as necessary, by use of the abbreviation “PROB” followed by the probability in tens of per cent and the time period during which the alternative value(s) is (are) expected to apply. The probability information should be placed after the element or elements forecast and be followed by the alternative value of the element or elements. The probability of a forecast of temporary fluctuations in meteorological conditions should be indicated, as necessary, by use of the abbreviation “PROB” followed by the probability in tens of per cent, placed before the change indicator “TEMPO” and associated time group. A probability of an alternative value or change of less than 30 per cent should not be considered sufficiently significant to be indicated. A probability of an alternative value or change of 50 per cent or more, for aviation purposes, should not be considered a probability but instead should be indicated, as necessary, by use of the change

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specification related to Forecast	APP 5	Page: 5

indicators “BECMG” or “TEMPO” or by subdivision of the validity period using the abbreviation “FM”. The probability group should not be used to qualify the change indicator “BECMG” nor the time indicator “FM”

### 1.5 Numbers of change and probability groups

It is recommended that the number of change and probability groups should be kept to a minimum and should not normally exceed five groups.

### 1.6 Dissemination of TAF

TAF and amendments thereto shall be disseminated to international OPMET databanks and the centres designated by regional air navigation agreement for the operation of aeronautical fixed service Internet-based services, in accordance with regional air navigation agreement.

## 2. CRITERIA RELATED TO TREND FORECASTS

### 2.1 Format of trend forecasts

Trend forecasts shall be issued in accordance with the templates shown in Appendix 3, Tables A3 -1 and A3-2. The units and scales used in the trend forecast shall be the same as those used in the report to which it is appended.

*Note.— Examples of trend forecasts are given in Appendix 3.*

### 2.2 Inclusion of meteorological elements in trend forecasts

#### 2.2.1 General provisions

The trend forecast shall indicate significant changes in respect of one or more of the elements: surface wind, visibility, weather and clouds. Only those elements shall be included for which a significant change is expected. However, in the case of significant changes in respect of cloud, all cloud groups, including layers or masses not expected to change shall be indicated. In the case of a significant change in visibility, the phenomenon causing the reduction of visibility shall also be indicated. When no change is expected to occur, this shall be indicated by the term “NOSIG”.

#### 2.2.2 Surface wind

The trend forecast shall indicate changes in the surface wind which involve:

- a) a change in the mean wind direction of 60° or more, the mean speed before and/or after the change being 5 m/s (10 kt) or more;
- b) a change in mean wind speed of 5 m/s (10 kt) or more; and
- c) changes in the wind through values of operational significance. The threshold values shall be established by the MET service provider in consultation with the ATS authority and the operators concerned, taking into account changes in the wind which would:
  - 1) require a change in runway(s) in use; and
  - 2) indicate that the runway tailwind and crosswind components will change through values representing the main operating limits of typical aircraft operating at the aerodrome.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specification related to Forecast	APP 5	Page: 6

### 2.2.3 Visibility

When the visibility is expected to improve and change to or pass through one or more of the following values, or when the visibility is expected to deteriorate and pass through one or more of the following values: 150, 350, 600, 800, 1 500 or 3 000 m, the trend forecast shall indicate the change. When significant numbers of flights are conducted in accordance with the visual flight rules, the forecast shall additionally indicate changes to or passing through 5 000 m.

*Note.— In trend forecasts appended to local routine and special reports, visibility refers to the forecast visibility along the runway(s); in trend forecasts appended to METAR and SPECI, visibility refers to the forecast prevailing visibility.*

### 2.2.4 Weather phenomena

2.2.4.1 The trend forecast shall indicate the expected onset, cessation or change in intensity of one or more of the following weather phenomena or combinations thereof:

- freezing precipitation
- moderate or heavy precipitation (including showers)
- thunderstorm (with precipitation)
- dust storm
- sandstorm
- other weather phenomena given in Appendix 3, 4.4.2.3, as agreed between the meteorological authority, the appropriate ATS authority and the operators concerned.

2.2.4.2 The trend forecast shall indicate the expected onset or cessation of one or more of the following weather phenomena or combinations thereof:

- ice crystals
- freezing fog
- low drifting dust, sand or snow
- blowing dust, sand or snow
- thunderstorm (without precipitation)
- squall
- funnel cloud (tornado or waterspout).

2.2.4.3 The total number of phenomena reported in 2.2.4.1 and 2.2.4.2 shall not exceed three.

2.2.4.4 The expected end of occurrence of the weather phenomena shall be indicated by the abbreviation “NSW”.

### 2.2.5 Clouds

When the height of the base of a cloud layer of BKN or OVC extent is expected to lift and change to or pass through one or more of the following values, or when the height of the base of a cloud layer of BKN or OVC extent is expected to lower and pass through one or more of the following values: 30, 60, 150, 300 and 450 m (100, 200, 500, 1 000 and 1 500 ft), the trend forecast shall indicate the change. When the height of the base of a cloud layer is below or is expected to fall below or rise above 450 m (1500 ft), the trend forecast shall also indicate changes in cloud amount from SKC, FEW, or SCT increasing to BKN or OVC, or changes from BKN or OVC decreasing to SKC, FEW or SCT. When no cumulonimbus and no cloud below 1 500 m (5 000 ft) or below the highest minimum sector altitude, whichever is greater, are forecast and “CAVOK” and “SKC” are not appropriate, the abbreviation “NSC” shall be used.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>		BCAR - 3	
	Technical Specification related to Forecast		APP 5	Page: 7

### 2.2.6 Vertical visibility

When the sky is expected to remain or become obscured and vertical visibility observations are available at the aerodrome, and the vertical visibility is forecast to improve and change to or pass through one or more of the following values, or when the vertical visibility is forecast to deteriorate and pass through one or more of the following values: 30, 60, 150 or 300 m (100, 200, 500 or 1 000 ft), the trend forecast shall indicate the change.

### 2.2.7 Additional criteria

Criteria for the indication of changes based on local aerodrome operating minima, additional to those specified in 2.2.2 to 2.2.6, shall be used as agreed between the designated MET service provider and the operator concerned.

## 2.3 Use of change groups

*Note.— Guidance on the use of change indicators in trend forecasts is given in Table A 3-3.*

2.3.1 When a change is expected to occur, the trend forecast shall begin with one of the change indicators “BECMG” or “TEMPO”.

2.3.2 The change indicator “BECMG” shall be used to describe forecast changes where the meteorological conditions are expected to reach or pass through specified, values at a regular or irregular rate. The period during which, or the time at which, the change is forecast to occur shall be indicated, using the abbreviations “FM”, “TL”, or “AT”, as appropriate, each followed by a time group in hours and minutes. When the change is forecast to begin and end wholly within the trend forecast period, the beginning and end of the change shall be indicated by using the abbreviations “FM” and “TL”, respectively, with their associated time groups. When the change is forecast to commence at the beginning of the trend forecast period but be completed before the end of that period, the abbreviation “FM” and its associated time group shall be omitted and only “TL” and its associated time group shall be used. When the change is forecast to begin during the trend forecast period and be completed at the end of that period, the abbreviation “TL” and its associated time group shall be omitted and only “FM” and its associated time group shall be used. When the change is forecast to occur at a specified time during the trend forecast period, the abbreviation “AT” followed by its associated time group shall be used. When the change is forecast to commence at the beginning of the trend forecast period and be completed by the end of that period or when the change is forecast to occur within the trend forecast period but the time is uncertain, the abbreviations “FM”, “TL” or “AT” and their associated time groups shall be omitted and the change indicator “BECMG” shall be used alone.

2.3.3 The change indicator “TEMPO” shall be used to describe forecast temporary fluctuations in the meteorological conditions which reach or pass specified values and last for a period of less than one hour in each instance and, in the aggregate, cover less than one-half of the period during which the fluctuations are forecast to occur. The period during which the temporary fluctuations are forecast to occur shall be indicated, using the abbreviations “FM” and/or “TL”, as appropriate, each followed by a time group in hours and minutes. When the period of temporary fluctuations in the meteorological conditions is forecast to begin and end wholly within the trend forecast period, the beginning and end of the period of temporary fluctuations shall be indicated by using the abbreviations “FM” and “TL”, respectively, with their associated time groups. When the period of temporary fluctuations is forecast to commence at the beginning of the trend forecast period but cease before the end of that period, the abbreviation “FM” and its associated time group shall be omitted and only “TL” and its associated time group shall be used. When the period of temporary fluctuations is forecast to begin during the trend forecast period and cease by the end of that period, the abbreviation “TL” and its associated time group shall be omitted and only “FM” and its associated time group shall be used. When the period of temporary fluctuations is forecast to commence at the beginning of the trend forecast period and cease by the end of that period, both abbreviations “FM” and “TL” and their associated time groups shall be omitted and the change indicator “TEMPO” shall be used alone.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specification related to Forecast	APP 5	Page: 8

## 2.4 Use of the probability indicator

The indicator “PROB” shall not be used in trend forecasts.

## 3. CRITERIA RELATED TO FORECASTS FOR TAKE-OFF

### 3.1 Format of forecasts for take-off

The format of the forecast should be as agreed between the designated MET service provider and the operator concerned. The order of the elements and the terminology, units and scales used in forecasts for take-off should be the same as those used in reports for the same aerodrome.

### 3.2 Amendments to forecasts for take-off

The criteria for the issuance of amendments to forecasts for take-off for surface wind direction and speed, temperature and pressure and any other elements agreed locally should be agreed between the MET service provider and the operators concerned. The criteria should be consistent with the corresponding criteria for special reports established for the aerodrome in accordance with Appendix 3, 2.3.1.

## 4. CRITERIA RELATED TO AREA FORECASTS FOR LOW-LEVEL FLIGHTS

### 4.1 Format and content of GAMET area forecast

When prepared in GAMET format, area forecasts shall contain two sections: Section I related to information on en-route weather phenomena hazardous to low-level flights, prepared in support of the issuance of AIRMET information, and Section II related to additional information required by low-level flights. The content and order of elements in a GAMET area forecast, when prepared, shall be in accordance with the template shown in Table A5-3. Additional elements in Section II shall be included in accordance with regional air navigation agreement. Elements which are already covered by a SIGMET message shall be omitted from GAMET area forecasts.

### 4.2 Amendments to GAMET area forecasts

When a weather phenomenon hazardous to low-level flights has been included in the GAMET area forecast and the phenomenon forecast does not occur, or is no longer forecast, a GAMET AMD shall be issued, amending only the weather element concerned.

*Note.— Specifications regarding the issuance of AIRMET information amending the area forecast in respect of weather phenomena hazardous for low-level flights are given in Appendix 6.*

### 4.3 Content of area forecasts for low-level flights in chart form

4.3.1 When chart form is used for area forecasts for low-level flights, the forecast of upper wind and upper-air temperature shall be issued for points separated by no more than 500 km (300 NM) and for at least the following altitudes: 600, 1 500 and 3 000 m (2 000, 5 000 and 10 000 ft), and 4 500 m (15 000 ft) in mountainous areas.

4.3.2 When chart form is used for area forecasts for low-level flights, the forecast of SIGWX phenomena shall be issued as low-level SIGWX forecast for flight levels up to 100 (or up to flight level 150 in

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

mountainous areas, or higher, where necessary). Low-level SIGWX forecasts shall include the following items:

- a) the phenomena warranting the issuance of a SIGMET as given in Appendix 6 and which are expected to affect low-level flights; and
- b) the elements in area forecasts for low-level flights as given in Table A5-3 except elements concerning:
  - 1) upper wind and upper-air temperature; and
  - 2) forecast QNH.

*Note.*— Guidance on the use of terms “ISOL”, “OCNL” and “FRQ” referring to cumulonimbus and towering cumulus clouds, and thunderstorms is given in Appendix 6.

#### 4.4 Exchange and dissemination of area forecasts for low-level flights

4.4.1 Area forecasts for low-level flights prepared in support of the issuance of AIRMET information shall be exchanged between aerodrome meteorological offices and/or meteorological watch offices responsible for the issuance of flight documentation for low-level flights in the flight information regions concerned.

4.4.2 Area forecasts for low-level flights, in support of international air navigation, prepared in accordance with regional air navigation agreement and in support of the issuance of AIRMET information should be disseminated to the aeronautical fixed service Internet-based services.

**Table A5-1. Template for TAF**

- Key: M = inclusion mandatory, part of every message;  
 C = inclusion conditional, dependent on meteorological conditions or method of observation;  
 O = inclusion optional.

*Note 1.*— The ranges and resolutions for the numerical elements included in TAF are shown in Table A5-4 of this appendix.

*Note 2.*— The explanations for the abbreviations can be found in the Procedures for Air Navigation Services — ICAO Abbreviations and Codes (PANS-ABC, ICAO Doc 8400).

Element as specified in Chapter 6	Detailed content	Template(s)	Examples
Identification of the type of forecast (M)	Type of forecast (M)	TAF or TAF AMD or TAF COR	TAF TAF AMD
Location indicator (M)	ICAO location indicator (M)	nnnn	YUDO <sub>1</sub>
Time of issue of forecast (M)	Day and time of issue of the forecast in UTC (M)	nnnnnZ	160000Z
Identification of a missing forecast (C)	Missing forecast identifier (C)	NIL	NIL
END OF TAF IF THE FORECAST IS MISSING.			

Element as specified			
----------------------	--	--	--

<i>in Chapter 6</i>	<i>Detailed content</i>	<i>Template(s)</i>		<i>Examples</i>	
Days and period of validity of forecast (M)	Days and period of the validity of the forecast in UTC (M)	nnnn/nnnn		0812/0918	
Identification of a cancelled forecast (C)	Cancelled forecast identifier (C)	CNL		CNL	
END OF TAF IF THE FORECAST IS CANCELLED.					
Surface wind (M)	Wind direction (M)	nnn or VRB <sub>2</sub>		24004MPS; VRB01MPS (24008KT); (VRB02KT) 19005MPS (19010KT) 00000MPS (00000KT) 140P49MPS (140P99KT) 12003G09MPS (12006G18KT) 24008G14MPS (24016G28KT)	
	Wind speed (M)	[P]nn[n]			
	Significant speed variations (C) <sub>3</sub>	G[P]nn[n]			
	Units of measurement (M)	MPS (or KT)			
Visibility (M)	Prevailing visibility (M)	nnnn	C A V O K	0350 CAVOK 7000 9000 9999	
				RA HZ +TSRA FG -FZDZ PRFG +TSRASN SNRA FG	
Weather (C) <sub>4, 5</sub>	Intensity of weather phenomena (C) <sub>6</sub>	- or +	—		
	Characteristics and type of weather phenomena (C) <sub>7</sub>	DZ or RA or SN or SG or PL or DS or SS or FZDZ or FZRA or SHGR or SHGS or SHRA or SHSN or TSGR or TSGS or TSRA or TSSN	FG or BR or SA or DU or HZ or FU or VA or SQ or PO or FC or TS or BCFG or BLDU or BLSA or BLSN or DRDU or DRSA or DRSN or FZFG or MIFG or PRFG		
Cloud (M) <sub>8</sub>	Cloud amount and height of base or vertical visibility (M)	FEWnnn or SCTnnn or BKNnnn or OVCnnn	VVnnn or VV///	NSC	FEW010 VV005 OVC020 VV/// NSC SCT005 BKN012 SCT008 BKN025CB
	Cloud type (C) <sub>4</sub>	CB or TCU	—		
Temperature (O) <sub>9</sub>	Name of the element (M)	TX		TX25/1013Z TN09/1005Z	
	Maximum temperature (M)	[M]nn/		TX05/2112Z TNM02/2103Z	
	Day and time of occurrence of the maximum temperature (M)	nnnnZ			
	Name of the element (M)	TN			
	Minimum temperature (M)	[M]nn/			
	Day and time of occurrence of the minimum temperature (M)	nnnnZ			

Expected significant changes to one or more of the above elements during the period of validity (C) <sub>4, 10</sub>	Change or probability indicator (M)	PROB30 [TEMPO] or PROB40 [TEMPO] or BECMG or TEMPO or FM	TEMPO 0815/0818 25017G25MPS (TEMPO 0815/0818 25034G50KT)
	Period of occurrence or change (M)	nnnn/nnnn or nnnnnn <sup>11</sup>	
	Wind (C) <sub>4</sub>	nnn[P]nn[n][G[P]nn[n]]MPS or VRBnnMPS (or nnn[P]nn[n][G[P]nn[n]]KT or VRBnnKT)	TEMPO 2212/2214 17006G13MPS 1000 TSRA SCT010CB BKN020 (TEMPO 2212/2214 17012G26KT 1000



			cover less than half of the period n <sub>01</sub> n <sub>02</sub> n <sub>03</sub> n <sub>04</sub> n <sub>05</sub> n <sub>06</sub> n <sub>07</sub> n <sub>08</sub> n <sub>09</sub> n <sub>10</sub> n <sub>11</sub> n <sub>12</sub> n <sub>13</sub> n <sub>14</sub> n <sub>15</sub> n <sub>16</sub> n <sub>17</sub> n <sub>18</sub> n <sub>19</sub> n <sub>20</sub>
PROBnn	—	n <sub>01</sub> n <sub>02</sub> n <sub>03</sub> n <sub>04</sub> n <sub>05</sub> n <sub>06</sub> n <sub>07</sub> n <sub>08</sub> n <sub>09</sub> n <sub>10</sub> n <sub>11</sub> n <sub>12</sub> n <sub>13</sub> n <sub>14</sub> n <sub>15</sub> n <sub>16</sub> n <sub>17</sub> n <sub>18</sub> n <sub>19</sub> n <sub>20</sub>	probability of occurrence (in %) of an alternative value of a forecast element or elements; nn = 30 or nn = 40 only; to be placed after the element(s) concerned
	TEMPO	n <sub>01</sub> n <sub>02</sub> n <sub>03</sub> n <sub>04</sub> n <sub>05</sub> n <sub>06</sub> n <sub>07</sub> n <sub>08</sub> n <sub>09</sub> n <sub>10</sub> n <sub>11</sub> n <sub>12</sub> n <sub>13</sub> n <sub>14</sub> n <sub>15</sub> n <sub>16</sub> n <sub>17</sub> n <sub>18</sub> n <sub>19</sub> n <sub>20</sub>	probability of occurrence of temporary fluctuations

**Table A5-3. Template for GAMET**

Key: M = inclusion mandatory, part of every message;  
 C = inclusion conditional, dependent on meteorological conditions;  
 O = inclusion optional;  
 = = a double line indicates that the text following it should be placed on the subsequent line.

<i>Element</i>	<i>Detailed content</i>	<i>Template(s)</i>	<i>Examples</i>
Location indicator of FIR/CTA (M)	ICAO location indicator of the ATS unit serving the FIR or CTA to which the GAMET refers (M)	nnnn	YUCC <sub>1</sub>
Identification (M)	Message identification (M)	GAMET	GAMET
Validity period (M)	Day-time groups indicating the period of validity in UTC (M)	VALID nnnnnn/nnnnnn	VALID 220600/221200
Location indicator of aerodrome meteorological office or meteorological watch office (M)	Location indicator of aerodrome meteorological office or meteorological watch office originating the message with a separating hyphen (M)	nnnn-	YUDO- <sub>1</sub>
Name of the FIR/CTA or part thereof (M)	Location indicator and name of the FIR/CTA, or part thereof for which the GAMET is issued (M)	nnnn nnnnnnnnnn FIR/[n] [BLW FLnnn] or nnnn nnnnnnnnnn CTA/[n] [BLW FLnnn]	YUCC AMSWELL FIR/2 BLW FL120 YUCC AMSWELL FIR

<i>Element</i>	<i>Detailed content</i>	<i>Template(s)</i>			<i>Examples</i>
		<i>Identifier and time</i>	<i>Location</i>	<i>Content</i>	
Indicator for the beginning of Section I (M)	Indicator to identify the beginning of Section I (M)	SECN I			SECN I
Surface wind (C)	Widespread surface wind exceeding 15 m/s (30 kt)	SFC WIND: [nn/nn]	[N OF Nnn or Snn] or [S OF Nnn or Snn] or	nnn/[n]nnMPS (or nnn/[n]nnKT)	SFC WIND: 10/12 310/16MPS SFC WIND: E OF W110 050/40KT
Surface visibility (C)	Widespread surface visibility below 5 000 m including the weather phenomena causing the reduction in visibility	SFC VIS: [nn/nn]	[W OF Wnnn or Ennn] or [E OF Wnnn or Ennn] or [nnnnnnnnnn] <sub>2</sub>	nnnnM FG or BR or SA or DU or HZ or FU or VA or PO or DS or SS or DZ or RA or SN or SG or FC or GR or	SFC VIS: 06/08 N OF N51 3000M BR

Significant weather (C)	Significant weather conditions encompassing thunderstorms, heavy sandstorm and duststorm, and volcanic ash	SIGWX: [nn/nn]		ISOL TS or OCNL TS or FRQ TS or OBSC TS or EMBD TS or HVY DS or HVY SS or SQL TS or ISOL TSGR or OCNL TSGR or FRQ TSGR or OBSC TSGR or EMBD TSGR or SQL TSGR or VA
Mountain obscuration (C)	Mountain obscuration	MT OBSC: [nn/nn]		nnnnnnnnn <sub>2</sub> MT OBSC: S OF N48 MT PASSES
Cloud (C)	Widespread areas of broken or overcast cloud with height of base less than 300 m (1 000 ft) above ground level (AGL) or above mean sea level (AMSL) and/or any occurrence of cumulonimbus (CB) or towering cumulus (TCU) clouds	SIG CLD: [nn/nn]		BKN or OVC [n]nnn/[n]nnnM (or [n]nnn/[n]nnnFT) AGL or AMSL ISOL or OCNL or FRQ or OBSC or EMBD CB <sub>s</sub> or TCU <sub>s</sub> [n]nnn/[n]nnnM (or [n]nnn/[n]nnnFT) AGL or AMSL
Icing (C)	Icing (except for that occurring in convective clouds and for severe icing for which a SIGMET message has already been issued)	ICE: [nn/nn]		MOD FLnnn/nnn or MOD ABV FLnnn or SEV FLnnn/nnn or SEV ABV FLnnn
Turbulence (C)	Turbulence (except for that occurring in convective clouds and for severe turbulence for which a SIGMET message has already been issued)	TURB: [nn/nn]		MOD FLnnn/nnn or MOD ABV FLnnn or SEV FLnnn/nnn or SEV ABV FLnnn
Mountain wave (C)	Mountain wave (except for severe mountain wave for which a SIGMET message has already been issued)	MTW: [nn/nn]		MOD FLnnn/nnn or MOD ABV FLnnn or SEV FLnnn/nnn or SEV ABV FLnnn

Element	Detailed content	Template(s)			Examples
		Identifier and time	Location	Content	
SIGMET (C)	SIGMET messages applicable to the FIR/CTA concerned or a sub-area thereof, for which the area forecast is valid	SIGMET APPLICABLE:	—	[n][n] <sub>4</sub>	SIGMET APPLICABLE: 3, A5, B06
or HAZARDOUS WX NIL (C) <sub>s</sub>		HAZARDOUS WX NIL			HAZARDOUS WX NIL
Indicator for the beginning of Section II (M)	Indicator to identify the beginning of Section II (M)	SECN II			SECN II
Pressure centres and fronts (M)	Pressure centres and fronts and their expected movements and developments	PSYS: [nn]	Nnnnn or Snnnn Wnnnnn or Ennnnn or Nnnnn or Snnnn	L [n]nnnHPA or H [n]nnnHPA or FRONT or NIL	PSYS: 06 N5130 E01000 L 1004HPA MOV NE 25KT WKN

			Wnnnnn or Ennnnn TO Nnnnn or Snnnn Wnnnnn or Ennnnn		
			—	MOV N or MOV NE or MOV E or MOV SE or MOV S or MOV SW or MOV W or MOV NW nnKMH (or nnKT) WKN or NC or INTSF	
Upper winds and temperatures (M)	Upper wind and upper-air temperature for at least the following altitudes: 600, 1 500 and 3 000 m (2 000, 5 000 and 10 000 ft)	WIND/T:	Nnnnn or Snnnn Wnnnnn or Ennnnn  or	[n]nnnM (or [n]nnnFT) nnn/[n]nnMPS (or nnn/[n]nnKT) PSnn or MSnn	WIND/T: 2000FT N5500 W01000 270/18MPS PS03 5000FT N5500 W01000 250/20MPS MS02 10000FT N5500 W01000 240/22MPS MS11
Cloud (M)	Cloud information not included in Section I giving type, height of base and top above ground level (AGL) or above mean sea level (AMSL)	CLD: [nn/nn]	[N OF Nnn or Snn] or [S OF Nnn or Snn] or [W OF Wnnn or Ennn] or [E OF Wnnn or Ennn] or [nnnnnnnnn] <sub>2</sub>	FEW or SCT or BKN or OVC ST or SC or CU or AS or AC or NS [n]nnn/[n]nnnM (or [n]nnn/[n]nnnFT) AGL or AMSL or NIL	CLD: BKN SC 2500/8000FT AGL  CLD: NIL
Freezing level (M)	Height indication of 0°C level(s) above ground level (AGL) or above mean sea level (AMSL), if lower than the top of the airspace for which the forecast is supplied	FZLVL:		[ABV] [n]nnnFT AGL or AMSL	FZLVL: 3000FT AGL
Forecast QNH (M)	Forecast lowest QNH during the period of validity	MNM QNH:		[n]nnnHPA	MNM QNH: 1004HPA
Sea-surface temperature and state of the sea (O)	Sea-surface temperature and state of the sea if required by regional air navigation agreement	SEA:		Tnn HGT [n]nM	SEA: T15 HGT 5M
Volcanic eruptions (M)	Name of volcano	VA:		nnnnnnnnn or NIL	VA: ETNA VA: NIL

Notes.—

- 1) Fictitious location.
- 2) Free text describing well-known geographical locations should be kept to a minimum
- 3) The location of the CB and/or TCU should be specified in addition to any widespread areas of broken or overcast cloud as given in the example.
- 4) List as necessary, with comma separating.
- 5) When no elements are included in Section I.

**Table A5-4. Ranges and resolutions for the numerical elements included in TAF**

<i>Element as specified in Chapter 6</i>	<i>Range</i>	<i>Resolution</i>
Wind direction: ° true	000 – 360	10
Wind speed: MPS	00 – 99*	1
KT	00 – 199*	1
Visibility: M	0000 – 0750	50
M	0800 – 4 900	100
M	5 000 – 9 000	1 000
M	10 000 –	0 (fixed value: 9 999)
Vertical visibility: 30's M (100's FT)	000 – 020	1
Cloud: height of cloud base: 30's M (100's FT)	000 – 100	1
Air temperature (maximum and minimum): °C	–80 – +60	1

\* There is no aeronautical requirement to report surface wind speeds of 50 m/s (100 kt) or more; however, provision has been made for reporting wind speeds up to 99 m/s (199 kt) for non-aeronautical purposes, as necessary.

### Example A5-1: TAF

*TAF for YUDO (Donlon/International)\*:*

TAF YUDO 151800Z 1600/1618 13005MPS 9000 BKN020 BECMG 1606/1608 SCT015CB BKN020 TEMPO 1608/1612 17006G12MPS 1000 TSRA SCT010CB BKN020 FM161230 15004MPS 9999 BKN020

*Meaning of the forecast:*

TAF for Donlon/International\* issued on the 15th of the month at 1800 UTC valid from 0000 UTC to 1800 UTC on the 16th of the month; surface wind direction 130 degrees; wind speed 5 metres per second; visibility 9 kilometres, broken cloud at 600 metres; becoming between 0600 UTC and 0800 UTC on the 16th of the month, scattered cumulonimbus cloud at 450 metres and broken cloud at 600 metres; temporarily between 0800 UTC and 1200 UTC on the 16th of the month surface wind direction 170 degrees; wind speed 6 metres per second gusting to 12 metres per second; visibility 1000 metres in a thunderstorm with moderate rain, scattered cumulonimbus cloud 300 metres and broken cloud at 600 metres; from 1230 UTC on the 16th of the month surface wind direction 150 degrees; wind speed 4 metres per second; visibility 10 kilometres or more; and broken cloud at 600 metres.

\* Fictitious location

*Note.— In this example, the primary units “metre per second” and “metre” were used for wind speed and height of cloud base, respectively. However, in accordance with BCAR-5, the corresponding non-SI alternative units “knot” and “foot” may be used instead.*

### Example A5-2. Cancellation of TAF

*Cancellation of TAF for YUDO (Donlon/International)\*:*

TAF AMD YUDO 161500Z 1600/1618 CNL

*Meaning of the forecast:*

Amended TAF for Donlon/International\* issued on the 16th of the month at 1500 UTC cancelling the previously issued TAF valid from 0000 UTC to 1800 UTC on the 16th of the month.

\* Fictitious location

### Example A5-3. GAMET area forecast

YUCC GAMET VALID 220600/221200 YUDO –  
 YUCC AMSWELL FIR/2 BLW FL120  
 SECN I  
 SFC WIND: 10/12 310/16MPS  
 SFC VIS: 06/08 N OF N51 3000M BR  
 SIGWX: 11/12 ISOL TS  
 SIG CLD: 06/09 N OF N51 OVC 800/1100FT AGL 10/12 ISOL TCU 1200/8000FT AGL  
 ICE: MOD FL050/080  
 TURB: MOD ABV FL090  
 SIGMETS APPLICABLE: 3,5  
 SECN II  
 PSYS: 06 N5130 E01000 L 1004HPA MOV NE 25 KT WKN  
 WIND/T: 2000FT N5500 W01000 270/18MPS PS03 5000FT N5500 W01000 250/20MPS  
 MS02 10000FT N5500 W01000 240/22MPS MS11  
 CLD: BKN SC 2500/8000FT AGL  
 FZLVL: 3000FT AGL  
 MNM QNH: 1004HPA  
 SEA: T15 HGT 5M  
 VA: NIL

*Meaning:* An area forecast for low-level flights (GAMET) issued for sub-area two of the Amswell\* flight information region (identified by YUCC Amswell area control centre) for below flight level 120 by the Donlon/International\* aerodrome meteorological office (YUDO); the message is valid from 0600 UTC to 1200 UTC on the 22nd of the month.

Section I:

surface wind speed and direction:	between 1000 UTC and 1200 UTC surface wind direction 310 degrees; wind speed 16 metres per second;
surface visibility:	between 0600 UTC and 0800 UTC north of 51 degrees north 3 000 metres (due to mist);
significant weather phenomena:	between 1100 UTC and 1200 UTC isolated thunderstorms without hail;
significant clouds:	between 0600 UTC and 0900 UTC north of 51 degrees north overcast base 800, top 1100 feet above ground level; between 1000 UTC and 1200 UTC isolated towering cumulus base 1200, top 8000 feet above ground level;
icing:	moderate between flight level 050 and 080;
turbulence:	moderate above flight level 090 (at least up to flight level 120);
SIGMET messages:	3 and 5 applicable to the validity period and sub-area concerned.



Section II:

pressure systems: at 0600 UTC low pressure of 1 004 hectopascals at 51.5 degrees north 10.0 degrees east, expected to move north-eastwards at 25 knots and to weaken;

winds and temperatures: at 2 000 feet above ground level at 55 degrees north 10 degrees west wind direction 270 degrees, wind speed 18 metres per second, temperature plus 3 degrees Celsius; at 5 000 feet above ground level at 55 degrees north 10 degrees west wind direction 250 degrees, wind speed 20 metres per second, temperature minus 2 degrees Celsius; at 10 000 feet above ground level at 55 degrees north 10 degrees west wind direction 240 degrees, wind speed 22 metres per second, temperature minus 11 degrees Celsius;

clouds: broken stratocumulus, base 2 500 feet, top 8 000 feet above ground level;

freezing level: 3 000 feet above ground level;

minimum QNH: 1 004 hectopascals;

sea: surface temperature 15 degrees Celsius; and state of the sea 5 metres;

volcanic ash: nil.

\* Fictitious location

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 1

## **APPENDIX 6. TECHNICAL SPECIFICATIONS RELATED TO SIGMET AND AIRMET INFORMATION, AERODROME WARNINGS AND WIND SHEAR WARNINGS AND ALERTS**

*(See Chapter 7 of this document)*

*Note.— Data type designators to be used in abbreviated headings for SIGMET, AIRMET, tropical cyclone and volcanic ash advisory messages are given in the Manual on the Global Telecommunication System (WMO-No. 386).*

### **1. SPECIFICATIONS RELATED TO SIGMET INFORMATION**

#### **1.1 Format of SIGMET messages**

1.1.1 The content and order of elements in a SIGMET message shall be in accordance with the template shown in Table A6 -1.

1.1.2 Messages containing SIGMET information shall be identified as: “SIGMET”.

1.1.3 The sequence number referred to in the template in Table A6-1 shall correspond with the number of SIGMET messages issued for the flight information region since 0001 UTC on the day concerned. The meteorological watch offices whose area of responsibility encompasses more than one CTA shall issue separate SIGMET messages for each CTA within its area of responsibility.

1.1.4 In accordance with the template in Table A6 -1, only one of the following phenomena shall be included in a SIGMET message, using the abbreviations as indicated below:

At cruising level (irrespective of altitude):

Thunderstorm	
— Obscured	OBSC TS
— Embedded	EMBD TS
— Frequent	FRQ TS
— squall line	SQL TS
— obscured with hail	OBSC TSGR
— embedded with hail	EMBD TSGR
— frequent, with hail	FRQ TSGR
— squall line with hail	SQL TSGR
Turbulence	
— severe turbulence	SEV TURB
Icing	
— severe icing	SEV ICE
— severe icing due to freezing rain	SEV ICE (FZRA)
mountain wave	
— severe mountain wave	SEV MTW

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 2

Duststorm	
— heavy duststorm	HVY DS
Sandstorm	
— heavy sandstorm	HVY SS
volcanic ash	
— volcanic ash	VA (+ volcano name, if known)
radioactive cloud	RDOACT CLD

1.1.5 SIGMET information shall not contain unnecessary descriptive material. In describing the weather phenomena for which the SIGMET is issued, no descriptive material additional to that given in 1.1.4 shall be included. SIGMET information concerning thunderstorms or a tropical cyclone shall not include references to associated turbulence and icing.

1.1.6 SIGMET information shall be disseminated in IWXXM GML form and/or in accordance with 1.1.1.

*Note.— The technical specifications for IWXXM are contained in the Manual on Codes (WMO-No. 306), Volume I.3, Part D — Representation Derived from Data Models. Guidance on the implementation of IWXXM is provided in the Manual on the ICAO Meteorological Information Exchange Model (IWXXM) (ICAO Doc 10003).*

1.1.7 It is recommended that SIGMET, when issued in graphical format, should be as specified in Appendix 1.

*Note.— Guidance on the information exchange model, XML/GML and the metadata profile is provided in the Manual on the Digital Exchange of Aeronautical Meteorological Information (ICAO Doc 10003).*

## 1.2 Dissemination of SIGMET messages

1.2.1 SIGMET messages shall be disseminated to meteorological watch offices, and to other meteorological offices in accordance with regional air navigation agreement.

1.2.2 SIGMET messages shall be disseminated to international OPMET databanks and the centres designated by regional air navigation agreement for the operation of aeronautical fixed service Internet-based services, in accordance with regional air navigation agreement.

## 2. SPECIFICATIONS RELATED TO AIRMET INFORMATION

### 2.1 Format of AIRMET messages

2.1.1 The content and order of elements in an AIRMET message shall be in accordance with the template shown in Table A6-1A.

2.1.2 The sequence number referred to in the template in Table A6-1A shall correspond with the number of AIRMET messages issued for the flight information region since 0001 UTC on the day concerned. The meteorological watch offices whose area of responsibility encompasses more than one FIR and/or CTA shall issue separate AIRMET messages for each CTA within its area of responsibility.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

2.1.3 The flight information region shall be divided in sub-areas, as necessary.

2.1.4 In accordance with the template in Table A6-1A, only one of the following phenomena shall be included in an AIRMET message, using the abbreviations as indicated below:

At cruising levels below flight level 100 (or below flight level 150 in mountainous areas, or higher, where necessary):

- surface wind speed
  - widespread mean surface wind speed above 15 m/s (30 kt) SFC WSPD  
(+ wind speed, direction and units)
  
- surface visibility
  - widespread areas affected by reduction of visibility to less than 5 000 m, including the weather phenomenon causing the reduction of visibility SFC VIS  
(+ visibility)  
(+ one of the following weather phenomena or combinations thereof: BR, DS, DU, DZ, FC, FG, FU, GR, GS, HZ, PL, PO, RA, SA, SG, SN, SQ, SS or VA)
  
- thunderstorms
  - isolated thunderstorms without hail ISOL TS
  - occasional thunderstorms without hail OCNL TS
  - isolated thunderstorms with hail ISOL TSGR
  - occasional thunderstorms with hail OCNL TSGR
  
- mountain obscuration
  - mountains obscured MT OBSC
  
- cloud
  - widespread areas of broken or overcast cloud with height of base less than 300 m (1 000 ft) above ground level:
    - broken BKN CLD (+ height of the base and top and units)
    - overcast OVC CLD (+ height of the base and top and units)
  
- cumulonimbus clouds which are:
  - isolated ISOL CB
  - occasional OCNL CB
  - frequent FRQ CB
  
- towering cumulus clouds which are:
  - isolated ISOL TCU
  - occasional OCNL TCU

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 4

- frequent FRQ TCU
- icing
  - moderate icing (except for icing in convective clouds) MOD ICE
- turbulence
  - moderate turbulence (except for turbulence in convective clouds) MOD TURB
- mountain wave
  - moderate mountain wave MOD MTW

2.1.5 AIRMET information shall not contain unnecessary descriptive material. In describing the weather phenomena for which the AIRMET is issued, no descriptive material additional to that given in 2.1.4 shall be included. AIRMET information concerning thunderstorms or cumulonimbus clouds shall not include references to associated turbulence and icing.

*Note.— The specifications for SIGMET information which is also applicable to low-level flights are given in 1.1.4.*

2.1.6 AIRMET information shall be disseminated in IWXXM GML form and/or in accordance with 2.1.1.

*Note.— The technical specifications for IWXXM are contained in the Manual on Codes (WMO-No. 306), Volume 1.3, Part D — Representation Derived from Data Models. Guidance on the implementation of IWXXM is provided in the Manual on the ICAO Meteorological Information Exchange Model (IWXXM) (ICAO Doc 10003).*

## 2.2 Dissemination of AIRMET messages

2.2.1 AIRMET messages should be disseminated to meteorological watch offices in adjacent FIRs and to other meteorological watch offices or aerodrome meteorological offices, as agreed between the meteorological authorities concerned.

2.2.2 AIRMET messages should be transmitted to international operational meteorological databanks and the centres designated by regional air navigation agreement for the operation of aeronautical fixed service Internet-based services, in accordance with regional air navigation agreement.

## 3. SPECIFICATIONS RELATED TO SPECIAL AIR-REPORTS

*Note.— This appendix deals with the uplink of special air-reports. The general specifications related to special air reports are in Appendix 4.*

3.1 Special air-reports should be uplinked for 60 minutes after their issuance.

3.2 Information on wind and temperature included in automated special air-reports should not be uplinked to other aircraft in flight

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 5

#### **4. DETAILED CRITERIA RELATED TO SIGMET AND AIRMET MESSAGES AND SPECIAL AIR REPORTS (UPLINK)**

##### **4.1 Identification of the flight information region**

In cases where the airspace is divided into an FIR and an upper flight information region (UIR), the SIGMET should be identified by the location indicator of the air traffic services unit serving the FIR.

*Note.— The SIGMET message applies to the whole airspace within the lateral limits of the FIR, i.e. to the FIR and to the UIR. The particular areas and/or flight levels affected by the meteorological phenomena causing the issuance of the SIGMET are given in the text of the message.*

##### **4.2 Criteria related to phenomena included in SIGMET and AIRMET messages and special air-reports (uplink)**

4.2.1 An area of thunderstorms and cumulonimbus clouds should be considered:

- a) obscured (OBSC) if it is obscured by haze or smoke or cannot be readily seen due to darkness;
- b) embedded (EMBD) if it is embedded within cloud layers and cannot be readily recognized;
- c) isolated (ISOL) if it consists of individual features which affect, or are forecast to affect, an area with a maximum spatial coverage less than 50 per cent of the area concerned (at a fixed time or during the period of validity); and
- d) occasional (OCNL) if it consists of well-separated features which affect, or are forecast to affect, an area with a maximum spatial coverage between 50 and 75 per cent of the area concerned (at a fixed time or during the period of validity).

4.2.2 An area of thunderstorms should be considered frequent (FRQ) if within that area there is little or no separation between adjacent thunderstorms with a maximum spatial coverage greater than 75 per cent of the area affected, or forecast to be affected, by the phenomenon (at a fixed time or during the period of validity).

4.2.3 Squall line (SQL) should indicate a thunderstorm along a line with little or no space between individual clouds.

4.2.4 Hail (GR) should be used as a further description of the thunderstorm, as necessary.

4.2.5 Severe and moderate turbulence (TURB) should refer only to: low-level turbulence associated with strong surface winds; rotor streaming; or turbulence whether in cloud or not in cloud (CAT). Turbulence should not be used in connection with convective clouds.

4.2.6 Turbulence shall be considered:

- a) severe when the peak value of EDR exceeds 0.45; and
- b) moderate whenever the peak value of EDR is equal to or above 0.20 and below 45.

4.2.7 Severe and moderate icing (ICE) should refer to icing in other than convective clouds. Freezing rain (FZRA) should refer to severe icing conditions caused by freezing rain.

4.2.8 A mountain wave (MTW) should be considered:

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 6

- a) severe whenever an accompanying downdraft of 3.0 m/s (600 ft/min) or more and/or severe turbulence is observed or forecast; and
- b) moderate whenever an accompanying downdraft of 1.75–3.0 m/s (350–600 ft/min) and/or moderate turbulence is observed or forecast.

4.2.9 Sandstorm/duststorm should be considered:

- a) heavy whenever the visibility is below 200 m and the sky is obscured; and
- b) moderate whenever the visibility is:
  - 1) below 200 m and the sky is not obscured; or
  - 2) between 200 m and 600 m.

## 5. SPECIFICATIONS RELATED TO AERODROME WARNINGS

### 5.1 Format and dissemination of aerodrome warnings

5.1.1 The aerodrome warnings shall be issued in accordance with the template in Table A6-2 where required by operators or aerodrome services, and shall be disseminated in accordance with local arrangements to those concerned.

5.1.2 The sequence number referred to in the template in Table A6-2 shall correspond with the number of aerodrome warnings issued for the aerodrome since 0001 UTC on the day concerned.

5.1.3 In accordance with the template in Table A6-2, aerodrome warnings should relate to the occurrence or expected occurrence of one or more of the following phenomena:

- thunderstorm
- hail
- snow (including the expected or observed snow accumulation)
- freezing precipitation
- hoar frost or rime
- duststorm
- strong surface wind and gusts
- squall
- frost
- toxic chemicals
- other phenomena as agreed locally.

5.1.4 The use of text additional to the abbreviations listed in the template in Table A6 -2 should be kept to a minimum. The additional text should be prepared in abbreviated plain language using approved ICAO abbreviations and numerical values. If no ICAO approved abbreviations are available, English plain language text should be used.

### 5.2 Quantitative criteria for aerodrome warnings

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 7

When quantitative criteria are necessary for the issue of aerodrome warnings covering, for example, the expected maximum wind speed, the criteria should be established by agreement between the aerodrome meteorological office and the users concerned.

## 6. SPECIFICATIONS RELATED TO WIND SHEAR WARNINGS

### 6.1 Detection of wind shear

Evidence of the existence of wind shear should be derived from:

- a) ground-based, wind shear remote-sensing equipment, for example, Doppler radar;
- b) ground-based, wind shear detection equipment, for example, a system of surface wind and/or pressure sensors located in an array monitoring a specific runway or runways and associated approach and departure paths;
- c) aircraft observations during the climb-out or approach phases of flight to be made in accordance with Chapter 5; or
- d) other meteorological information, for example, from appropriate sensors located on existing masts or towers in the vicinity of the aerodrome or nearby areas of high ground.

*Note.— Wind shear conditions are normally associated with the following phenomena:*

- *thunderstorms, microbursts, funnel cloud (tornado or waterspout), and gust fronts*
- *frontal surfaces*
- *strong surface winds coupled with local topography*
- *sea breeze fronts*
- *mountain waves (including low-level rotors in the terminal area)*
- *low-level temperature inversions.*

### 6.2 Format and dissemination of wind shear warnings and alerts

*Note.— Information on wind shear is also to be included as supplementary information in local routine reports, local special reports, METAR and SPECI in accordance with the templates in Appendix 3, Tables A3-1 and A3-2.*

6.2.1 The wind shear warnings shall be issued in accordance with the template in Table A6-3 and shall be disseminated in accordance with local arrangements to those concerned.

6.2.2 The sequence number referred to in the template in Table A6 - 3 shall correspond with the number of wind shear warnings issued for the aerodrome since 0001 UTC on the day concerned.

6.2.3 The use of text additional to the abbreviations listed in the template in Table A6-3 should be kept to a minimum. The additional text should be prepared in abbreviated plain language using approved ICAO abbreviations and numerical values. If no ICAO approved abbreviations are available, English plain language text should be used.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 8

6.2.4 When an aircraft report is used to prepare a wind shear warning, or to confirm a warning previously issued, the corresponding aircraft report, including the aircraft type, should be disseminated unchanged in accordance with local arrangements to those concerned.

*Note 1.— Following reported encounters by both arriving and departing aircraft, two different wind shear warnings may exist: one for arriving aircraft and one for departing aircraft.*

*Note 2.— Specifications for reporting the intensity of wind shear are still undergoing development. It is recognized, however, that pilots, when reporting wind shear, may use the qualifying terms “moderate”, “strong” or “severe”, based to a large extent on their subjective assessment of the intensity of the wind shear encountered.*

6.2.5 The wind shear alerts shall be disseminated from automated, ground-based, wind shear remote-sensing or detection equipment in accordance with local arrangements to those concerned.

6.2.6 Where microbursts are observed, reported by pilots or detected by ground-based, wind shear detection or remote-sensing equipment, the wind shear warning and wind shear alert should include a specific reference to microburst.

6.2.7 Where information from ground-based, wind shear detection or remote-sensing equipment is used to prepare a wind shear alert, the alert shall, if practicable, relate to specific sections of the runway and distances along the approach path or take-off path as agreed between the meteorological authority, the appropriate ATS authority and the operators concerned.

**Table A6-1A. Template for SIGMET and AIRMET messages**

Key: M = inclusion mandatory, part of every message;  
C = inclusion conditional, included whenever applicable;  
= = a double line indicates that the text following it should be placed on the subsequent line.

*Note 1.— The ranges and resolutions for the numerical elements included in SIGMET/AIRMET messages are shown in Table A6-4 of this appendix.*

*Note 2.— In accordance with 1.1.5 and 2.1.5, severe or moderate icing and severe or moderate turbulence (SEV ICE, MOD ICE, SEV TURB, MOD TURB) associated with thunderstorms, cumulonimbus clouds or tropical cyclones should not be included.*



<i>Element</i>	<i>Detailed content</i>	<i>SIGMET template</i>	<i>AIRMET template</i>	<i>SIGMET message examples</i>	<i>AIRMET message examples</i>
Location indicator of FIR/CTA (M) <sub>1</sub>	ICAO location indicator of the ATS unit serving the FIR or CTA to which the SIGMET/AIRMET refers	nnnn		YUCC <sub>2</sub> YUDD <sub>2</sub>	
Identification (M)	Message identification and sequence number <sub>3</sub>	SIGMET [n][n]n	AIRMET [n][n]n	SIGMET 1 SIGMET 01 SIGMET A01	AIRMET 9 AIRMET 19 AIRMET B19
Validity period (M)	Day-time groups indicating the period of validity in UTC	VALID nnnnnn/nnnnnn		VALID 010000/010400 VALID 221215/221600 VALID 101520/101800 VALID 251600/252200 VALID 152000/160000 VALID 192300/200300	
Location indicator of MWO (M)	Location indicator of MWO originating the message with a separating hyphen	nnnn-		YUDO <sub>-2</sub> YUSO <sub>-2</sub>	
Name of the FIR/CTA (M)	Location indicator and name of the FIR/CTA <sub>4</sub> for which the SIGMET/AIRMET is issued	nnnn nnnnnnnnnn FIR or UIR or FIR/UIR or nnnn nnnnnnnnnn CTA	nnnn nnnnnnnnnn FIR/[n]	YUCC AMSWELL FIR <sub>2</sub> YUDD SHANLON <sub>2</sub> FIR/UIR <sub>2</sub> UIR FIR/UIR YUDD SHANLON CTA <sub>2</sub>	YUCC AMSWELL FIR/2 <sub>2</sub> YUDD SHANLON FIR <sub>2</sub>
IF THE SIGMET OR AIRMET MESSAGE IS TO BE CANCELLED, SEE DETAILS AT THE END OF THE TEMPLATE.					
Status indicator (C) <sub>5</sub>	Indicator of test or exercise	TEST or EXER	TEST or EXER	TEST EXER	TEST EXER



Element	Detailed content	SIGMET template	AIRMET template	SIGMET message examples	AIRMET message examples
Phenomenon (M) <sup>5</sup>	Description of phenomenon causing the issuance of SIGMET/AIRMET	OBSC <sup>7</sup> TS[GR <sup>8</sup> ] EMBD <sup>9</sup> TS[GR <sup>8</sup> ] FRQ <sup>10</sup> TS[GR <sup>8</sup> ] SQL <sup>11</sup> TS[GR <sup>8</sup> ]  TC nnnnnnnnn PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] CB or TC NN <sup>12</sup> PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] CB  SEV TURB <sup>13</sup> SEV ICE <sup>14</sup> SEV ICE (FZRA) <sup>14</sup> SEV MTW <sup>15</sup>  HVY DS HVY SS  [VA ERUPTION] [MT nnnnnnnnn] [PSN Nnn[nn] or Snn[nn] Ennn[nn] or Wnnn[nn]] VA CLD  RDOACT CLD	SFC WIND nnn/nn[n]MPS (or SFC WIND nnn/nn[n]KT)  SFC VIS [n][n]nm (nn) <sup>16</sup>  ISOL <sup>17</sup> TS[GR <sup>8</sup> ] OCNL <sup>18</sup> TS[GR <sup>8</sup> ]  MT OBSC  BKN CLD nnn[ABV][n]hnnM (or BKN CLD [n]hnn[ABV][n]hnnFT) or BKN CLD SFC/[ABV][n]hnnM (or BKN CLD SFC/[ABV][n]hnnFT) OVC CLD  nnn[ABV][n]hnnM (or OVC CLD [n]hnn[ABV][n]hnnFT) or OVC CLD SFC/[ABV][n]hnnM (or OVC CLD SFC/[ABV][n]hnnFT)  ISOL <sup>17</sup> CB <sup>19</sup> OCNL <sup>18</sup> CB <sup>19</sup> FRQ <sup>10</sup> CB <sup>19</sup>  ISOL <sup>17</sup> TCU <sup>19</sup> OCNL <sup>18</sup> TCU <sup>19</sup> FRQ <sup>10</sup> TCU <sup>19</sup>  MOD TURB <sup>13</sup> MOD ICE <sup>14</sup> MOD MTW <sup>15</sup>	OBSC TS OBSC TSGR EMBD TS EMBD TSGR FRQ TS FRQ TSGR SQL TS SQL TSGR  TC GLORIA PSN N10 W060 CB TC NN PSN S2030 E06030 CB  SEV TURB SEV ICE SEV ICE (FZRA) SEV MTW HVY DS HVY SS  VA ERUPTION MT ASHVAL <sup>2</sup> PSN S15 E073 VA CLD  RDOACT CLD	SFC WIND 040/40MPS SFC WIND 310/20KT  SFC VIS 1500M (BR)  ISOL TS ISOL TSGR OCNL TS OCNL TSGR  MT OBSC  BKN CLD 120/900M BKN CLD 400/3000FT BKN CLD 1000/5000FT BKN CLD SFC/3000M BKN CLD SFC/ABV10000FT  OVC CLD 270/ABV3000M OVC CLD 900/ABV10000FT OVC CLD 1000/5000FT OVC CLD SFC/3000M OVC CLD SFC/ABV10000FT  ISOL CB OCNL CB FRQ CB  ISOL TCU OCNL TCU FRQ TCU  MOD TURB MOD ICE MOD MTW
Observed or forecast phenomenon (M) <sup>20, 21</sup>	Indication whether the information is observed and expected to continue, or forecast	OBS [AT nnnnZ] or FCST [AT nnnnZ]		OBS OBS AT 1210Z FCST FCST AT 1815Z	



<i>Element</i>	<i>Detailed content</i>	<i>SIGMET template</i>	<i>AIRMET template</i>	<i>SIGMET message examples</i>	<i>AIRMET message examples</i>
Location (C) <sup>20, 21, 23</sup>	Location (referring to latitude and longitude (in degrees and minutes))	<p>Nnn[nn] Wnnn[nn] or Nnn[nn] Ennn[nn] or Snn[nn] Wnnn[nn] or Snn[nn] Ennn[nn]</p> <p>or</p> <p>N OF Nnn[nn] or S OF Nnn[nn] or N OF Snn[nn] or S OF Snn[nn] [AND]</p> <p>W OF Wnnn[nn] or E OF Wnnn[nn] or W OF Ennn[nn] or E OF Ennn[nn]</p> <p>or</p> <p>N OF Nnn[nn] or N OF Snn[nn] AND S OF Nnn[nn] or S OF Snn[nn]</p> <p>or</p> <p>W OF Wnnn[nn] or W OF Ennn[nn] AND E OF Wnnn[nn] or E OF Ennn[nn]</p> <p>or</p> <p>N OF LINE<sup>22</sup> or NE OF LINE<sup>22</sup> or E OF LINE<sup>22</sup> or SE OF LINE<sup>22</sup> or S OF LINE<sup>22</sup> or SW OF LINE<sup>22</sup> or W OF LINE<sup>22</sup> or NW OF LINE<sup>22</sup> Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]</p> <p>[- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p>[AND N OF LINE<sup>22</sup> or NE OF LINE<sup>22</sup> or E OF LINE<sup>22</sup> or SE OF LINE<sup>22</sup> or S OF LINE<sup>22</sup> or SW OF LINE<sup>22</sup> or W OF LINE<sup>22</sup> or NW OF LINE<sup>22</sup> Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]</p> <p>[- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p>or</p> <p>W<sup>22, 23</sup> Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - [Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p>or</p> <p>APRX nnKM WID LINE<sup>22</sup> BTN (or nnNM WID LINE<sup>22</sup> BTN) Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] - Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]</p> <p>or</p> <p>ENTIRE UIR</p> <p>or</p> <p>ENTIRE FIR</p> <p>or</p> <p>ENTIRE FIR/UIR</p> <p>or</p> <p>ENTIRE CTA</p> <p>or<sup>4</sup></p> <p>Wl nnnKM (or nnnNM) OF TC CENTRE</p> <p>or<sup>5</sup></p> <p>Wl nnKM (or nnNM) OF Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]</p>		<p>N2020 W07005</p> <p>N48 E010</p> <p>S60 W160</p> <p>S0530 E16530</p> <p>N OF N50</p> <p>S OF N5430</p> <p>N OF S10</p> <p>S OF S4530</p> <p>W OF W155</p> <p>E OF W45</p> <p>W OF E15540</p> <p>E OF E09015</p> <p>N OF N1515 AND W OF E13530</p> <p>S OF N45 AND N OF N40</p> <p>N OF LINE S2520 W11510 - S2520 W12010</p> <p>SW OF LINE N50 W005 - N60 W020</p> <p>SW OF LINE N50 W020 - N45 E010 AND NE OF LINE N45 W020 - N40 E010</p> <p>WI N6030 E02550 - N6055 E02500 - N6050 E02630 - N6030 E02550</p> <p>APRX 50KM WID LINE BTN N64 W017 - N60 W010 - N57 E010</p> <p>ENTIRE FIR</p> <p>ENTIRE UIR</p> <p>ENTIRE FIR/UIR</p> <p>ENTIRE CTA</p> <p>WI 400KM OF TC CENTRE</p> <p>WI 250NM OF TC CENTRE</p> <p>WI 30KM OF N6030 E02550<sup>7</sup></p>	



Element	Detailed content	SIGMET template	AIRMET template	SIGMET message examples	AIRMET message examples
Level (C) <sup>20, 21</sup>	Flight level or altitude	[SFC]/FLnnn or [SFC]/nnnnM (or [SFC]/[n]nnnnFT) or FLnnn/nnn or TOP FLnnn or [TOP] ABV FLnnn (or [TOP] ABV [n]nnnnFT) [nnnn]/nnnnM (or [[n]nnnn]/[n]nnnnFT) or [nnnnM]/FLnnn (or [[n]nnnnFT]/FLnnn)  or <sup>24</sup> TOP [ABV or BLW] FLnnn		FL180 SFC/FL070 SFC/3000M SFC/10000FT FL050/080 TOP FL390 ABV FL250 TOP ABV FL100 ABV 7000FT TOP ABV 9000FT TOP ABV 10000FT 3000M 2000/3000M 8000FT 6000/12000FT 2000M/FL150 10000FT/FL250  TOP FL500 TOP ABV FL500 TOP BLW FL450	
Movement or expected movement (C) <sup>20, 25, 34</sup>	Movement or expected movement (direction and speed) with reference to one of the sixteen points of compass, or stationary	MOV N [nnKMH] or MOV NNE [nnKMH] or MOV NE [nnKMH] or MOV ENE [nnKMH] or MOV E [nnKMH] or MOV ESE [nnKMH] or MOV SE [nnKMH] or MOV SSE [nnKMH] or MOV S [nnKMH] or MOV SSW [nnKMH] or MOV SW [nnKMH] or MOV WSW [nnKMH] or MOV W [nnKMH] or MOV WNW [nnKMH] or MOV NW [nnKMH] or MOV NNW [nnKMH] (or MOV N [nnKT] or MOV NNE [nnKT] or MOV NE [nnKT] or MOV ENE [nnKT] or MOV E [nnKT] or MOV ESE [nnKT] or MOV SE [nnKT] or MOV SSE [nnKT] or MOV S [nnKT] or MOV SSW [nnKT] or MOV SW [nnKT] or MOV WSW [nnKT] or MOV W [nnKT] or MOV WNW [nnKT] or MOV NW [nnKT] or MOV NNW [nnKT]) or STNR		MOV SE MOV NNW  MOV E 40KMH MOV E 20KT MOV WSW 20KT  STNR	
Changes in intensity (C) <sup>20</sup>	Expected changes in intensity	INTSF or WKN or NC		INTSF WKN NC	
Forecast time (C) <sup>20, 21, 25</sup>	Indication of the forecast time of phenomenon	FCST AT nnnnZ	—	FCST AT 2200Z	—
TC forecast position (C) <sup>24</sup>	Forecast position of TC centre at the end of the validity period of the SIGMET message	TC CENTRE PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] or <sup>31</sup> TC CENTRE PSN Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] CB	—	TC CENTRE PSN N1030 E16015 TC CENTRE PSN N1015 E15030 CB	—



<i>Element</i>	<i>Detailed content</i>	<i>SIGMET template</i>	<i>AIRMET template</i>	<i>SIGMET message examples</i>	<i>AIRMET message examples</i>
Forecast position (C) <sup>20, 21, 26, 27, 33</sup>	Forecast position of phenomenon at the end of the validity period of the SIGMET message <sup>22</sup>	<p>Nnn[nn] Wnnn[nn] or                      Nnn[nn] Ennn[nn] or                      Snn[nn] Wnnn[nn] or                      Snn[nn] Ennn[nn]</p> <p>or</p> <p>N OF Nnn[nn] or                      S OF Nnn[nn] or                      N OF Snn[nn] or                      S OF Snn[nn] [AND]                      W OF Wnnn[nn] or                      E OF Wnnn[nn] or                      W OF Ennn[nn] or                      E OF Ennn[nn]</p> <p>or</p> <p>N OF Nnn[nn] or                      N OF Snn[nn] AND S OF                      Nnn[nn] or S OF Snn[nn]</p> <p>or</p> <p>W OF Wnnn[nn] or                      W OF Ennn[nn] AND E OF                      Wnnn[nn] or E OF Ennn[nn]</p> <p>or</p> <p>N OF LINE<sup>22</sup> or                      NE OF LINE<sup>22</sup> or                      E OF LINE<sup>22</sup> or                      SE OF LINE<sup>22</sup> or                      S OF LINE<sup>22</sup> or                      SW OF LINE<sup>22</sup> or                      W OF LINE<sup>22</sup> or                      NW OF LINE<sup>22</sup> Nnn[nn] or                      Snn[nn] Wnnn[nn] or                      Ennn[nn] - Nnn[nn] or                      Snn[nn] Wnnn[nn] or                      Ennn[nn]                      [- Nnn[nn] or Snn[nn]                      Wnnn[nn] or Ennn[nn]]                      [AND N OF LINE<sup>22</sup> or                      NE OF LINE<sup>22</sup> or                      E OF LINE<sup>22</sup> or                      SE OF LINE<sup>22</sup> or                      S OF LINE<sup>22</sup> or                      SW OF LINE<sup>22</sup> or                      W OF LINE<sup>22</sup> or                      NW OF LINE<sup>22</sup> Nnn[nn] or                      Snn[nn] Wnnn[nn] or                      Ennn[nn] - Nnn[nn] or                      Snn[nn] Wnnn[nn] or                      Ennn[nn]                      [- Nnn[nn] or Snn[nn]                      Wnnn[nn] or Ennn[nn]]</p>	—	<p>N30 W170</p> <p>N OF N30</p> <p>S OF S50 AND W OF                      E170</p> <p>S OF N46 AND N OF N39</p> <p>NE OF LINE N35 W020 -                      N45 W040</p> <p>SW OF LINE N48 W020 -                      N43 E010 AND NE OF                      LINE N43 W020 - N38                      E010</p> <p>WI N20 W090 -                      N05 W090 - N10 W100 -                      N20 W100 - N20 W090</p> <p>APRX 50KM WID LINE                      BTN N64 W017 -                      N57 W005 - N55 E010 -                      N55 E030</p> <p>ENTIRE FIR                      ENTIRE UIR                      ENTIRE FIR/UIR</p> <p>ENTIRE CTA</p> <p>NO VA EXP</p> <p>WI 30KM OF N6030                      E02550+</p> <p>WI 150NM OF TC                      CENTRE</p>	—



Element	Detailed content	SIGMET template	AIRMET template	SIGMET message examples	AIRMET message examples
		or WIP <sup>22</sup> Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] – Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] – Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] – Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]			
		or APRX nnKM WID LINE <sup>22</sup> BTN (nnNM WID LINE <sup>22</sup> BTN) Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] – Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]] [- Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn]]			
		or ENTIRE FIR or ENTIRE UIR or ENTIRE FIR/UIR or ENTIRE CTA or <sup>23</sup> NO VA EXP or <sup>25</sup> WI nnKM (or nnNM) OF Nnn[nn] or Snn[nn] Wnnn[nn] or Ennn[nn] or <sup>24</sup> WI nnnKM (nnnNM) OF TC CENTRE			
Repetition of elements (C) <sup>29</sup>	Repetition of elements included in a SIGMET message for volcanic ash cloud or tropical cyclone	[AND] <sup>29</sup>	—	AND	—

OR

Cancellation of SIGMET/ AIRMET (C) <sup>30</sup>	Cancellation of SIGMET/AIRMET referring to its identification	CNL SIGMET [n][n]n nnnnnn/hnnnnn or <sup>28</sup> CNL SIGMET [n][n]n nnnnnn/hnnnnn VA MOV TO nnnn FIR	CNL AIRMET [n][n]n nnnnnn/hnnnnn	CNL SIGMET 2 101200/101600 CNL SIGMET A13 251030/251430 VA MOV TO YUDO FIR <sup>2</sup>	CNL AIRMET 05 151520/151800
--------------------------------------------------	---------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------	-------------------------------------	-----------------------------------------------------------------------------------------------------	--------------------------------

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 15

Notes.—

1. See 4.1.
2. Fictitious location.
3. In accordance with 1.1.3 and 2.1.2.
4. See 2.1.3.
5. Used only when the message issued to indicate that a test or an exercise is taking place. When the word “TEST” or the abbreviation “EXER” is included, the message may contain information that should not be used operationally or will otherwise end immediately after the word “TEST”. *[Applicable 7 November 2019]*
6. In accordance with 1.1.4 and 2.1.4.
7. In accordance with 4.2.1 a).
8. In accordance with 4.2.4.
9. In accordance with 4.2.1 b).
10. In accordance with 4.2.2.
11. In accordance with 4.2.3.
12. Used for unnamed tropical cyclones.
13. In accordance with 4.2.5 and 4.2.6.
14. In accordance with 4.2.7.
15. In accordance with 4.2.8.
16. In accordance with 2.1.4.
17. In accordance with 4.2.1 c).
18. In accordance with 4.2.1 d).
19. The use of cumulonimbus (CB) and towering cumulus (TCU) is restricted to AIRMETs in accordance with 2.1.4.
20. In the case of volcanic ash cloud covering more than one area within the FIR, these elements can be repeated, as necessary. Each location and forecast position is to be preceded by an observed or forecast time.
21. In the case of cumulonimbus clouds associated with a tropical cyclone covering more than one area within the FIR, these elements can be repeated as necessary. Each location and forecast position must be preceded by an observed or forecast time.
22. A straight line is to be used between two points drawn on a map in the Mercator projection or between two points which crosses lines of longitude at a constant angle.
23. The number of coordinates should be kept to a minimum and should not normally exceed seven.
24. Only for SIGMET messages for tropical cyclones.
25. Only for SIGMET messages for radioactive cloud. When detailed information on the release is not available, a radius of up to 30 kilometres (or 16 nautical miles) from the source can be applied; and a vertical extent from surface (SFC) to the upper limit of the flight information region/upper flight information region (FIR/UIR) or control area (CTA) is to be applied.
26. Only for SIGMET messages for radioactive cloud. A radius of up to 30 kilometres (or 16 nautical miles) from the source; and a vertical extent from surface (SFC) to the upper limit of the flight information region/upper flight information region (FIR/UIR) or control area (CTA) is to be applied.
27. The elements “forecast time” and “forecast position” are not to be used in conjunction with the element “movement or expected movement”.
28. The levels of the phenomena remain fixed throughout the forecast period.
29. Only for SIGMET messages for volcanic ash.
30. To be used for more than one volcanic ash clouds or cumulonimbus clouds associated with a tropical cyclone simultaneously affecting the FIR concerned..
31. End of the message (as the SIGMET/AIRMET message is being cancelled).
32. The term CB is to be used when the forecast position for the cumulonimbus cloud is included.
33. The forecast position for cumulonimbus (CB) cloud occurring in connection with tropical cyclones relate to the forecast time of the tropical cyclone centre position, not to the end of the validity period of the SIGMET message.
34. For SIGMET messages for radioactive cloud, only within (WI) is to be used for the elements “location” and “forecast position”.
35. For SIGMET messages for radioactive cloud, only stationary (STNR) is to be used for the element “movement or expected movement”.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

**Table A6-1B. Template for special air-reports (uplink)**

Key: M = inclusion mandatory, part of every message;  
 C = inclusion conditional, included whenever applicable;  
 = = a double line indicates that the text following it should be placed on the subsequent line.

*Note.— The ranges and resolutions for the numerical elements included in special air-reports are shown in Table A6-4 of this appendix.*

<i>Element</i>	<i>Detailed content</i>	<i>Template<sup>1,2</sup></i>	<i>Examples</i>
Identification (M)	Message identification	ARS	ARS
Aircraft identification (M)	Aircraft radiotelephony call sign	nnnnnn	VA812 <sub>3</sub>
Observed phenomenon (M)	Description of observed phenomenon causing the issuance of the special air-report <sup>4</sup>	TS TSGR  SEV TURB SEV ICE  SEV MTW  HVY DS  VA CLD VA [MT nnnnnnnnnn]  MOD TURB MOD ICE	TS TSGR  SEV TURB SEV ICE  SEV MTW  HVY DS  VA CLD VA VA MT ASHVAL <sub>5</sub>  MOD TURB MOD ICE
Observation time (M)	Time of observation of observed phenomenon	OBS AT nnnnZ	OBS AT 1210Z
Observed Location (C)	Location (referring to latitude and longitude (in degrees and minutes)) of observed phenomenon	NnnnnWnnnnn or NnnnnEnnnnn or SnnnnWnnnnn or SnnnnEnnnnn	N2020W07005 S4812E01036
Observed Level (C)	Flight level or altitude of observed phenomenon	FLnnn or FLnnn/nnn or nnnnM (or [n]nnnnFT)	FL390 FL180/210 3000M 12000FT

*Notes.—*

1. No wind and temperature to be uplinked to other aircraft in flight in accordance with 3.2.
2. See 3.1.
3. Fictitious call sign.
4. In the case of special air-report for volcanic ash cloud, the vertical extent (if observed) and name of the volcano (if known) can be used.
5. Fictitious location.

**Table A6-2. Template for aerodrome warnings**

Key: M = inclusion mandatory, part of every message;  
 C = inclusion conditional, included whenever applicable.

*Note 1.— The ranges and resolutions for the numerical elements included in aerodrome warnings are shown in Table A6-4 of this appendix.*

*Note 2.— The explanations for the abbreviations can be found in the Procedures for Air Navigation Services — ICAO Abbreviations and Codes (PANS-ABC, ICAO Doc 8400).*

<i>Element</i>	<i>Detailed content</i>	<i>Templates</i>	<i>Examples</i>
Location indicator of the aerodrome (M)	Location indicator of the aerodrome	nnnn	YUCC <sub>1</sub>
Identification of the type of message (M)	Type of message and sequence number	AD WRNG [n]n	AD WRNG 2
Validity period (M)	Day and time of validity period in UTC	VALID nnnnnn/nnnnnn	VALID 211230/211530
IF THE AERODROME WARNING IS TO BE CANCELLED, SEE DETAILS AT THE END OF THE TEMPLATE.			
Phenomenon (M) <sub>2</sub>	Description of phenomenon causing the issuance of the aerodrome warning	TC <sub>3</sub> nnnnnnnnnn or [HVY] TS or GR or [HVY] SN [nnCM] <sub>3</sub> or [HVY] FZRA or [HVY] FZDZ or RIME <sub>4</sub> or [HVY] SS or [HVY] DS or SA or DU or SFC WSPD nn[n]MPS MAX nn[n] (SFC WSPD nn[n]KT MAX nn[n]) or SFC WIND nnn/nn[n]MPS MAX nn[n] (SFC WIND nnn/nn[n]KT MAX nn[n]) or SQ or FROST or TSUNAMI or VA[DEPO] or TOX CHEM or <i>Free text up to 32 characters</i> <sub>5</sub>	TC ANDREW HVY SN 25CM SFC WSPD 20MPS MAX 30 VA  TSUNAMI
Observed or forecast phenomenon (M)	Indication whether the information is observed and expected to continue, or forecast	OBS [AT nnnnZ] or FCST	OBS AT 1200Z OBS
Changes in intensity (C)	Expected changes in intensity	INTSF or WKN or NC	WKN
OR			
Cancellation of aerodrome warning <sub>6</sub>	Cancellation of aerodrome warning referring to its identification	CNL AD WRNG [n]n nnnnnn/nnnnnn	CNL AD WRNG 2 211230/211530 <sub>6</sub>

*Notes.—*

1. Fictitious location.
2. One phenomenon or a combination thereof, in accordance with 5.1.3.
3. In accordance with 5.1.3.
4. Hoar frost *or* rime in accordance with 5.1.3.
5. In accordance with 5.1.4.
6. End of the message (as the aerodrome warning is being cancelled).

**Table A6-3. Template for wind shear warnings**

Key: M = inclusion mandatory, part of every message;  
C = inclusion conditional, included whenever applicable.

*Note 1.— The ranges and resolutions for the numerical elements included in wind shear warnings are shown in Table A6-4 of this appendix.*

*Note 2.— The explanations for the abbreviations can be found in the PANS-ABC (ICAO Doc 8400).*

Element	Detailed content	Template(s)	Examples
Location indicator of the aerodrome (M)	Location indicator of the aerodrome	nnnn	YUCC <sub>1</sub>
Identification of the type of message (M)	Type of message and sequence number	WS WRNG [n]n	WS WRNG 1
Time of origin and validity period (M)	Day and time of issue and, where applicable, validity period in UTC	nnnnnn [VALID TL nnnnnn] or [VALID nnnnnn/nnnnnn]	211230 VALID TL 211330 221200 VALID 221215/221315
IF THE WIND SHEAR WARNING IS TO BE CANCELLED, SEE DETAILS AT THE END OF THE TEMPLATE.			
Phenomenon (M)	Identification of the phenomenon and its location	[MOD] or [SEV] WS IN APCH or [MOD] or [SEV] WS [APCH] RWYnnn or [MOD] or [SEV] WS IN CLIMB-OUT or [MOD] or [SEV] WS CLIMB-OUT RWYnnn or MBST IN APCH or MBST [APCH] RWYnnn or MBST IN CLIMB-OUT or MBST CLIMB-OUT RWYnnn	WS APCH RWY12 MOD WS RWY34  WS IN CLIMB-OUT  MBST APCH RWY26  MBST IN CLIMB-OUT
Observed, reported or forecast phenomenon (M)	Identification whether the phenomenon is observed or reported and expected to continue, or forecast	REP AT nnnn nnnnnnnn or OBS [AT nnnn] or FCST	REP AT 1510 B747 OBS AT 1205 FCST
Details of the phenomenon (C) <sub>2</sub>	Description of phenomenon causing the issuance of the wind shear warning	SFC WIND: nnn/nnMPS (or nnn/nnKT) nnnM (nnnFT)-WIND: nnn/nnMPS (or nnn/nnKT) or nnKMH (or nnKT) LOSS nnKM (or nnNM) FNA RWYnn or nnKMH (or nnKT) GAIN nnKM (or nnNM) FNA RWYnn	SFC WIND: 320/5MPS 60M-WIND: 360/13MPS (SFC WIND: 320/10KT 200FT-WIND: 360/26KT) 60KMH LOSS 4KM FNA RWY13 (30KT LOSS 2NM FNA RWY13)
OR			
Cancellation of wind shear warning <sub>3</sub>	Cancellation of wind shear warning referring to its identification	CNL WS WRNG [n]n nnnnnn/nnnnnn	CNL WS WRNG 1 211230/211330 <sub>3</sub>

*Notes.—*

1. Fictitious location.
2. Additional provisions in 6.2.3.
3. End of the message (as the wind shear warning is being cancelled).

	<b>Meteorological Service</b>	BCAR - 3	
	Specifications for SIGMET and AIRMET information, aerodrome warnings and wind shear warnings and alerts	APP 6	Page: 19

**Example A6-5. SIGMET message for severe turbulence**

YUCC SIGMET 5 VALID 221215/221600 YUDO –  
 YUCC AMSWELL FIR SEV TURB OBS AT 1210Z N2020 W07005 FL250 INTSF FCST AT 1600Z S OF N2020 AND E OF W06950

*Meaning:*

The fifth SIGMET message issued for the AMSWELL\* flight information region (identified by YUCC Amswell area control centre) by the Donlon/International\* meteorological watch office (YUDO) since 0001 UTC; the message is valid from 1215 UTC to 1600 UTC on the 22nd of the month; severe turbulence was observed at 1210 UTC 20 degrees 20 minutes north and 70 degrees 5 minutes west at flight level 250; the turbulence is expected to strengthen in intensity; at 1600 UTC the severe turbulence is forecast to be located south of 20 degrees 20 minutes north and east of 69 degrees 50 minutes west.

\* Fictitious location

**Example A6-6. AIRMET message for moderate mountain wave**

YUCC AIRMET 2 VALID 221215/221600 YUDO –  
 YUCC AMSWELL FIR MOD MTW OBS AT 1205Z N48 E010 FL080 STNR NC

*Meaning:*

The second AIRMET message issued for the AMSWELL\* flight information region (identified by YUCC Amswell area control centre) by the Donlon/International\* meteorological watch office (YUDO) since 0001 UTC; the message is valid from 1215 UTC to 1600 UTC on the 22nd of the month; moderate mountain wave was observed at 1205 UTC at 48 degrees north and 10 degrees east at flight level 080; the mountain wave is expected to remain stationary and not to undergo any changes in intensity.

\* Fictitious location

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Technical Specifications related to Aeronautical Climatological Information	APP 7	Page: 1

## **APPENDIX 7. TECHNICAL SPECIFICATIONS RELATED TO AERONAUTICAL CLIMATOLOGICAL INFORMATION**

*(See Chapter 8 of this document)*

### **1. PROCESSING OF AERONAUTICAL CLIMATOLOGICAL INFORMATION**

Meteorological observations for regular and alternate aerodromes should be collected, processed and stored in a form suitable for the preparation of aerodrome climatological information.

### **2. EXCHANGE OF AERONAUTICAL CLIMATOLOGICAL INFORMATION**

Aeronautical climatological information should be exchanged on request between meteorological authorities. Operators and other aeronautical users desiring such information should normally apply to the designated MET service provider responsible for its preparation.

### **3. CONTENT OF AERONAUTICAL CLIMATOLOGICAL INFORMATION**

#### **3.1 Aerodrome climatological tables**

3.1.1 An aerodrome climatological table should give as applicable:

- a) mean values and variations there from, including maximum and minimum values, of meteorological elements (for example, of air temperature); and/or
- b) the frequency of occurrence of present weather phenomena affecting flight operations at the aerodrome (for example, of sandstorms); and/or
- c) the frequency of occurrence of specified values of one, or of a combination of two or more, elements (for example, of a combination of low visibility and low cloud).

3.1.2 Aerodrome climatological tables should include information required for the preparation of aerodrome climatological summaries in accordance with 3.2.

#### **3.2 Aerodrome climatological summaries**

Aerodrome climatological summaries should cover:

- a) frequencies of the occurrence of runway visual range/visibility and/or height of the base of the lowest cloud layer of BKN or OVC extent below specified values at specified times;
- b) frequencies of visibility below specified values at specified times;
- c) frequencies of the height of the base of the lowest cloud layer of BKN or OVC extent below specified values at specified times;
- d) frequencies of occurrence of concurrent wind direction and speed within specified ranges;

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Technical Specifications related to Aeronautical Climatological Information	APP 7	Page: 2

- e) frequencies of surface temperature in specified ranges of 5°C at specified times; and
- f) mean values and variations there from, including maximum and minimum values of meteorological elements required for operational planning purposes, including take-off performance calculations.

*Note.— Models of climatological summaries related to a) to e) are given in the Technical Regulations (WMO-No. 49), Volume II — Meteorological Service for International Air Navigation, Part III.*

---

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Service for Operators and Flight Crew Members	APP 8	Page:1

## **APPENDIX 8. TECHNICAL SPECIFICATIONS RELATED TO SERVICE FOR OPERATORS AND FLIGHT CREW MEMBERS**

*(See Chapter 9 of this document)*

*Note.— Specifications related to flight documentation (including the model charts and forms) are given in Appendix 1.*

### **1. MEANS OF SUPPLY AND FORMAT OF METEOROLOGICAL INFORMATION**

1.1 Meteorological information shall be supplied to operators and flight crew members by one or more of the following, as agreed between the designated MET service provider and the operator concerned, and with the order shown below not implying priorities:

- a) written or printed material, including specified charts and forms;
- b) data in digital form;
- c) briefing;
- d) consultation;
- e) display; or
- f) in lieu of a) to e), by means of an automated pre-flight information system providing self-briefing and flight documentation facilities while retaining access by operators and aircrew members to consultation, as necessary, with the meteorological office, in accordance with 5.1.

1.2 The designated meteorological authority, in consultation with the operator, shall determine:

- a) the type and format of meteorological information to be supplied; and
- b) methods and means of supplying that information.

1.3 On request by the operator, the meteorological information supplied for flight planning should include data for the determination of the lowest usable flight level.

### **2. SPECIFICATIONS RELATED TO INFORMATION FOR PRE-FLIGHT PLANNING AND IN-FLIGHT RE-PLANNING**

#### **2.1 Format of upper-air gridded information**

Upper-air gridded information supplied by the world area forecast centres (WAFCs) for pre-flight and in-flight replanning shall be in the GRIB code form.

*Note.— The GRIB code form is contained in the Manual on Codes (WMO-No. 306), Volume I.2, Part B — Binary Codes.*

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Service for Operators and Flight Crew Members	APP 8	Page:2

## 2.2 Format of information on significant weather

Information on significant weather supplied by WAFCs for pre-flight and in-flight replanning shall be in the BUFR code form.

*Note.— The BUFR code form is contained in the Manual on Codes (WMO-No. 306), Volume I.2, Part B — Binary Codes.*

## 2.3 Specific needs of helicopter operations

(Not applicable)

# 3. SPECIFICATIONS RELATED TO BRIEFING AND CONSULTATION

## 3.1 Information required to be displayed

The material displayed should be readily accessible to the flight crew members or other flight operations personnel concerned.

# 4. SPECIFICATIONS RELATED TO FLIGHT DOCUMENTATION

## 4.1 Presentation of information

4.1.1 The flight documentation related to forecasts of upper wind and upper-air temperature and SIGWX phenomena shall be presented in the form of charts. For low- level flights, alternatively, GAMET area forecasts shall be used.

*Note.— Models of charts and forms for use in the preparation of flight documentation are given in Appendix 1. These models and methods for their completion are developed by the World meteorological Organization on the basis of relevant operational requirements stated by the International Civil Aviation Organization.*

4.1.2 The flight documentation related to concatenated route-specific upper wind and upper-air temperature forecasts should be provided as agreed between the designated MET service provider and the operator concerned.

*Note.— Guidance on the design, formulation and use of concatenated charts is given in the Manual of Aeronautical Meteorological Practice (ICAO Doc 8896).*

4.1.3 METAR and SPECI (including trend forecasts as issued in accordance with regional air navigation agreement), TAF, GAMET, SIGMET and AIRMET shall be presented in accordance with the templates in Appendices 1, 2, 3, 5 and 6. Such meteorological information received from other meteorological offices shall be included in flight documentation without change.

*Note.— Examples of the form of presentation of METAR/SPECI and TAF are given in Appendix 1.*

4.1.4 The location indicators and the abbreviations used should be explained in the flight documentation.

4.1.5 The forms and the legend of charts included in flight documentation should be printed in English. Where appropriate, approved abbreviations should be used. The units employed for each element should be indicated; they should be in accordance with BCAR-5.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Service for Operators and Flight Crew Members	APP 8	Page:3

## 4.2 Charts in flight documentation

### 4.2.1 Characteristics of charts

4.2.1.1 Charts included in flight documentation should have a high standard of clarity and legibility and should have the following physical characteristics:

- a) for convenience, the largest size of charts should be about 42 × 30 cm (standard size A3) and the smallest size should be about 21 × 30 cm (standard size A4). The choice between these sizes should depend on the route lengths and the amount of detail that needs to be given in the charts as agreed between the meteorological authorities and the users concerned;
- b) major geographical features, such as coastlines, major rivers and lakes should be depicted in a way that makes them easily recognizable;
- c) for charts prepared by computer, meteorological data should take preference over basic chart information, the former cancelling the latter wherever they overlap;
- d) major aerodromes should be shown as a dot and identified by the first letter of the name of the city the aerodrome serves as given in Table AOP of the relevant regional air navigation plan;
- e) a geographical grid should be shown with meridians and parallels represented by dotted lines at each 10° latitude and longitude; dots should be spaced one degree apart;
- f) latitude and longitude values should be indicated at various points throughout the charts (i.e. not only at the edges); and
- g) labels on the charts for flight documentation should be clear and simple and should present the name of the world area forecast centre or, for non-world area forecast system (WAFS) products, the originating centre, the type of chart, date and valid time and, if necessary, the types of units used in an unambiguous way.

*Note.—When plotting shapes, particularly polygons, on maps, appropriate corrections are necessary if plotted on projections different to that used in the production of the original forecast area.*

4.2.1.2 Meteorological information included in flight documentation shall be represented as follows:

- a) winds on charts shall be depicted by arrows with feathers and shaded pennants on a sufficiently dense grid;
- b) temperatures shall be depicted by figures on a sufficiently dense grid;
- c) wind and temperature data selected from the data sets received from a world area forecast centre shall be depicted in a sufficiently dense latitude/longitude grid; and
- d) wind arrows shall take precedence over temperatures and either shall take precedence over chart background.

4.2.1.3 For short-haul flights, charts should be prepared covering limited areas at a scale of 1:15 × 106 as required.

### 4.2.2 Set of charts to be provided

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Service for Operators and Flight Crew Members	APP 8	Page:4

4.2.2.1 The minimum number of charts for flights between flight level 250 and flight level 630 shall include a high -level SIGWX chart (flight level 250 to flight level 630) and a forecast 250 hPa winds and temperature chart. The actual charts provided for pre-flight and in-flight planning and for flight documentation shall be as agreed between meteorological authorities and users concerned.

4.2.2.2 Charts to be provided shall be generated from the digital forecasts provided by the WAFCS whenever these forecasts cover the intended flight path in respect of time, altitude and geographical extent, unless otherwise agreed between the designated MET service provider and the operator concerned.

#### 4.2.3 Height indications

In flight documentation, height indications shall be given as follows:

- a) all references to en-route meteorological conditions, such as height indications of upper winds, turbulence or bases and tops of clouds, shall preferably be expressed in flight levels; they may also be expressed in pressure, altitude or, for low-level flights, height above ground level; and
- b) all references to aerodrome meteorological conditions, such as height indications of the bases of clouds, shall be expressed in height above the aerodrome elevation.

### 4.3 Specifications related to low-level flights

#### 4.3.1 In chart form

Where the forecasts are supplied in chart form, flight documentation for low -level flights, including those in accordance with the visual flight rules, operating up to flight level 100 (or up to flight level 150 in mountainous areas or higher, where necessary), should contain the following as appropriate to the flight:

- a) information from relevant SIGMET and AIRMET messages;
- b) upper wind and upper-air temperature charts as given in Appendix 5, 4.3.1;and
- c) significant weather charts as given in Appendix 5, 4.3.2.

#### 4.3.2 In abbreviated plain language

Where the forecasts are not supplied in chart form, flight documentation for low-level flights, including those in accordance with the visual flight rules, operating up to flight level 100 (up to flight level 150 in mountainous areas or higher, where necessary), should contain the following information as appropriate to the flight:

- a) SIGMET and AIRMET information; and
- b) GAMET area forecasts.

*Note.— An example of the GAMET area forecast is given in Appendix 5.*

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Service for Operators and Flight Crew Members	APP 8	Page:5

## **5. SPECIFICATIONS RELATED TO AUTOMATED PRE-FLIGHT INFORMATION SYSTEMS FOR BRIEFING, CONSULTATION, FLIGHT PLANNING AND FLIGHT DOCUMENTATION**

Automated pre-flight information systems for the supply of meteorological information for self-briefing, pre-flight planning and flight documentation should:

- a) provide for the continuous and timely updating of the system database and monitoring of the validity and integrity of the meteorological information stored;
- b) permit access to the system by operators and flight crew members and also by other aeronautical users concerned through suitable telecommunications means;
- c) use access and interrogation procedures based on abbreviated plain language and, as appropriate, ICAO location indicators, and aeronautical meteorological code data-type designators prescribed by WMO, or based on a menu driven user interface, or other appropriate mechanisms as agreed between the designated MET service provider and the operators concerned; and
- d) provide for rapid response to a user request for information.

*Note.— ICAO abbreviations and codes and location indicators are given respectively in the Procedures for Air Navigation Services — ICAO Abbreviations and Codes (PANS-ABC, ICAO Doc 8400) and Location Indicators (ICAO Doc 7910). Aeronautical meteorological code data-type designators are given in the Manual on the Global Telecommunication System (WMO-No. 386).*

## **6. SPECIFICATIONS RELATED TO INFORMATION FOR AIRCRAFT IN FLIGHT**

### **6.1 Supply of information requested by an aircraft in flight**

If an aircraft in flight requests meteorological information, the aerodrome meteorological office which receives the request should arrange to supply the information with the assistance, if necessary, of another meteorological office.

### **6.2 Information for in-flight planning by the operator**

Meteorological information for planning by the operator for aircraft in flight should be supplied during the period of the flight and should normally consist of any or all of the following:

- a) METAR and SPECI (including trend forecasts as issued in accordance with regional air navigation agreement);
- b) TAF and amended TAF;
- c) SIGMET and AIRMET information and special air-reports relevant to the flight, unless the latter have been the subject of a SIGMET message; and
- d) upper wind and upper-air temperature information.
- e) volcanic ash and tropical cyclone advisory information relevant to the flight; and

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

f) other meteorological information in alphanumeric or graphical form as agreed between the designated MET service provider and the operator concerned.

*Note.— Guidance on the display of graphical information in the cockpit is provided in ICAO Doc 8896.*

**Figure A8-1. Fixed areas of coverage of WAFS forecasts in chart form —Mercator projection**

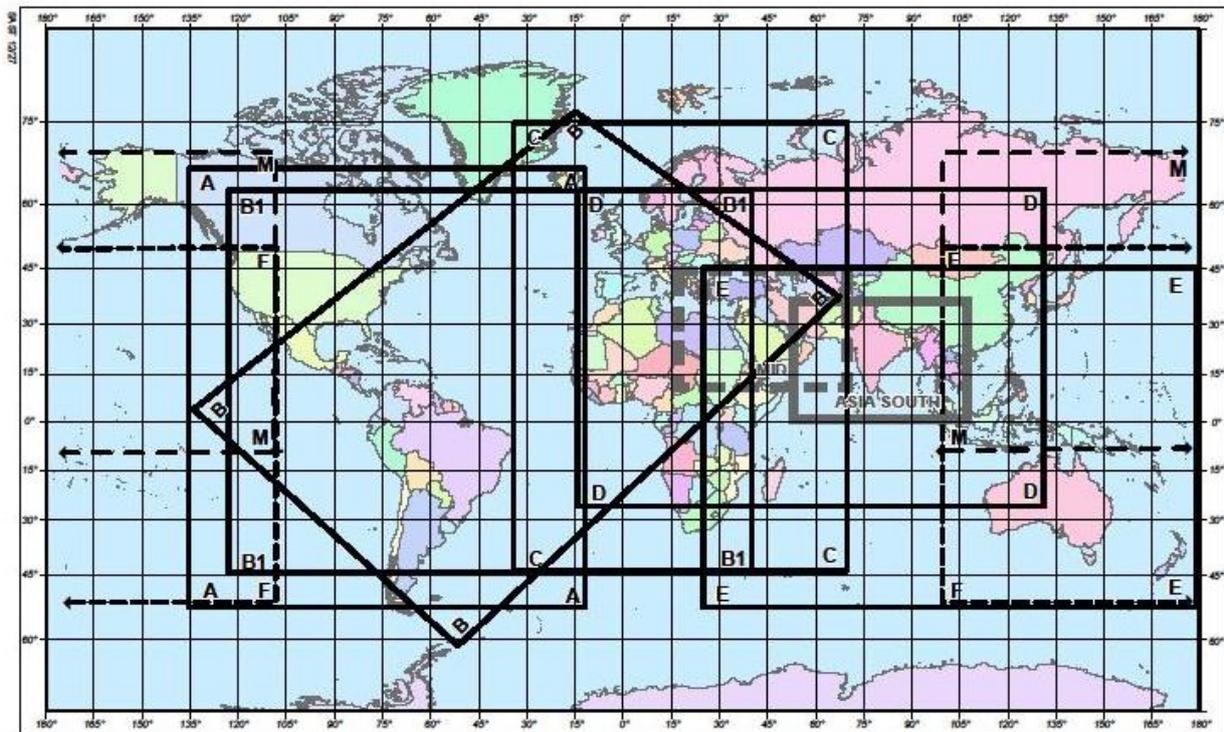


CHART	LATITUDE	LONGITUDE	CHART	LATITUDE	LONGITUDE
A	N6700	W13724	D	N6300	W01500
A	N6700	W01236	D	N6300	E13200
A	S5400	W01236	D	S2700	E13200
A	S5400	W13724	D	S2700	W01500
ASIA	N3600	E05300	E	N4455	E02446
ASIA	N3600	E10800	E	N4455	E18000
ASIA	0000	E10800	E	S5355	E18000
ASIA	0000	E05300	E	S5355	E02446
B	N0304	W13557	F	N5000	E10000
B	N7644	W01545	F	N5000	W11000
B	N3707	E06732	F	S5242	W11000
B	S6217	W05240	F	S5242	E10000
B1	N6242	W12500	M	N7000	E10000
B1	N6242	E04000	M	N7000	W11000
B1	S4530	E04000	M	S1000	W11000
B1	S4530	W12500	M	S1000	E10000
C	N7500	W03500	MID	N4400	E01700
C	N7500	E07000	MID	N4400	E07000
C	S4500	E07000	MID	N1000	E07000
C	S4500	W03500	MID	N1000	E01700

**Figure A8-2. Fixed areas of coverage of WAFS forecasts in chart form- Polar stereographic projection (northern hemisphere)**

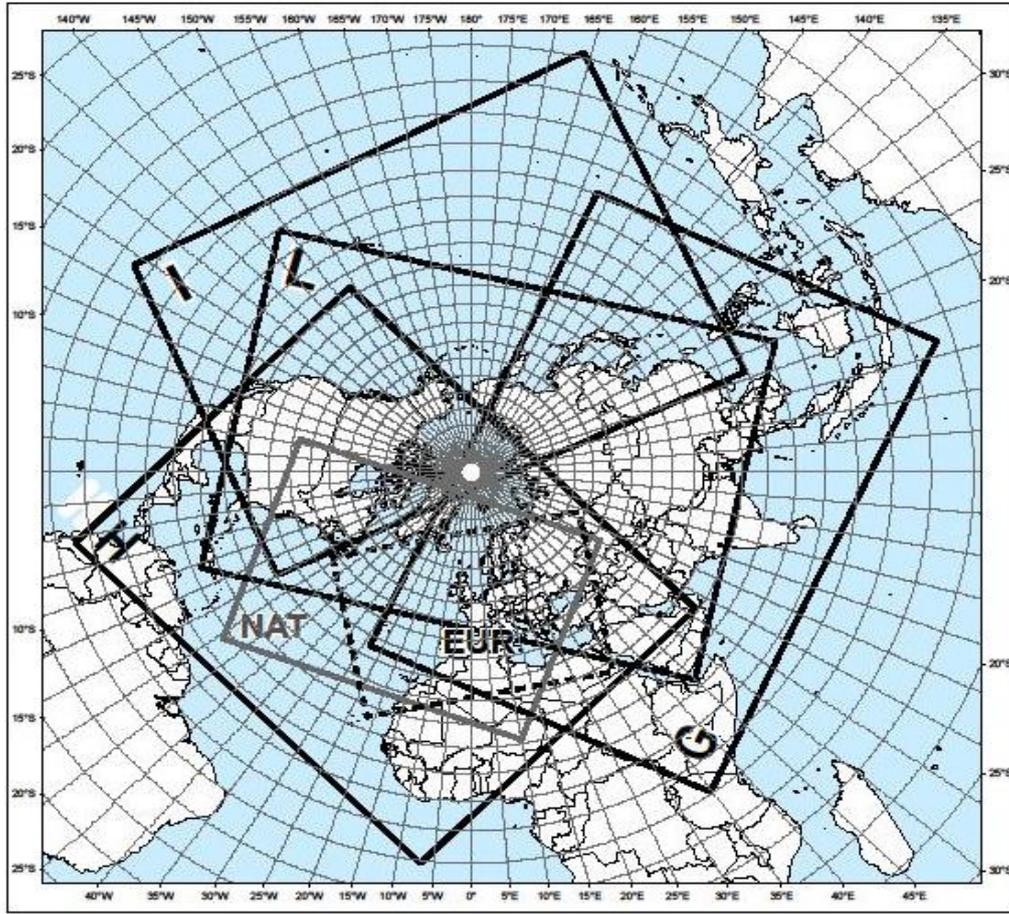


CHART	LATITUDE	LONGITUDE	CHART	LATITUDE	LONGITUDE
EUR	N4633	W05634	I	N1912	E11130
EUR	N5842	E06824	I	N3330	W06012
EUR	N2621	E03325	I	N0126	W12327
EUR	N2123	W02136	I	S0647	E16601
G	N3552	W02822	L	N1205	E11449
G	N1341	E15711	L	N1518	E04500
G	S0916	E10651	L	N2020	W06900
G	S0048	E03447	L	N1413	W14338
H	N3127	W14836	NAT	N4439	W10143
H	N2411	E05645	NAT	N5042	E06017
H	S0127	W00651	NAT	N1938	E00957
H	N0133	W07902	NAT	N1711	W05406

**Figure A8-3. Fixed areas of coverage of WAFS forecasts in chart form —Polar stereographic projection (southern hemisphere)**

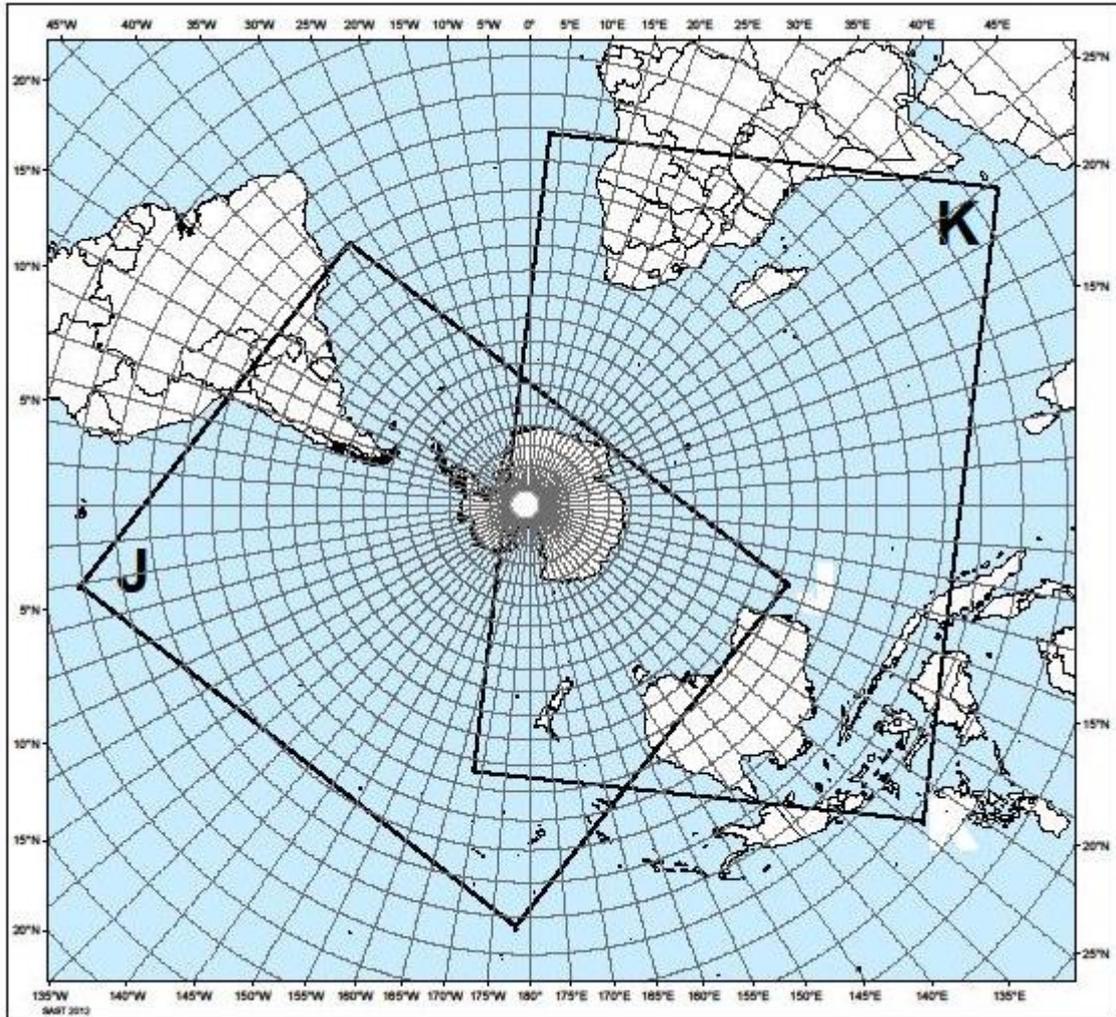


CHART	LATITUDE	LONGITUDE
J	S0318	W17812
J	N0037	W10032
J	S2000	W03400
J	S2806	E10717
K	N1255	E05549
K	N0642	E12905
K	S2744	W16841
K	S1105	E00317

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Information for ATS, SAR and AIS	APP 9	Page: APP 9-1

## **APPENDIX 9. TECHNICAL SPECIFICATIONS RELATED TO INFORMATION FOR AIR TRAFFIC SERVICES, SEARCH AND RESCUE SERVICES AND AERONAUTICAL INFORMATION SERVICES**

*(See Chapter 10 of this document)*

### **1. INFORMATION TO BE PROVIDED FOR AIR TRAFFIC SERVICES UNITS**

#### **1.1 List of information for the aerodrome control tower**

The following meteorological information shall be supplied, as necessary, to an aerodrome control tower by its associated aerodrome meteorological office:

- a) local routine and special reports, METAR and SPECI, TAF and trend forecasts and amendments thereto, for the aerodrome concerned;
- b) SIGMET and AIRMET information, wind shear warnings and alerts and aerodrome warnings;
- c) any additional meteorological information agreed upon locally, such as forecasts of surface wind for the determination of possible runway changes;
- d) information received on volcanic ash cloud, for which a SIGMET has not already been issued, as agreed between the meteorological and ATS authorities concerned; and
- e) information received on pre-eruption volcanic activity and/or a volcanic eruption as agreed between the meteorological and ATS authorities concerned.

#### **1.2 List of information for the approach control unit**

The following meteorological information shall be supplied, as necessary, to an approach control unit by its associated aerodrome meteorological office:

- a) local routine and special reports, METAR and SPECI, TAF and trend forecasts and amendments thereto, for the aerodrome(s) with which the approach control unit is concerned;
- b) SIGMET and AIRMET information, wind shear warnings and alerts and appropriate special air-reports for the airspace with which the approach control unit is concerned and aerodrome warnings;
- c) any additional meteorological information agreed upon locally;
- d) information received on volcanic ash cloud, for which a SIGMET has not already been issued, as agreed between the meteorological and ATS authorities concerned; and
- e) information received on pre-eruption volcanic activity and/or a volcanic eruption as agreed between the meteorological and ATS authorities concerned.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Information for ATS, SAR and AIS	APP 9	Page: APP 9-2

### 1.3 List of information for the area control centre and flight information centre

The following meteorological information shall be supplied, as necessary, to an area control centre or a flight information centre by its associated meteorological watch office:

- a) METAR and SPECI, including current pressure data for aerodromes and other locations, TAF and trend forecasts and amendments thereto, covering the flight information region (FIR) or the control area (CTA) and, if required by the flight information centre (FIC) or area control centre (ACC), covering aerodromes in neighbouring FIRs, as determined by regional air navigation agreement;
- b) forecasts of upper winds, upper-air temperatures and significant en-route weather phenomena and amendments thereto, particularly those which are likely to make operation under visual flight rules impracticable, SIGMET and AIRMET information and appropriate special air-reports for the FIR or CTA and, if determined by regional air navigation agreement and required by the FIC or ACC, for neighbouring FIRs;
- c) any other meteorological information required by the FIC or ACC to meet requests from aircraft in flight; if the information requested is not available in the associated meteorological watch office (MWO), that office shall request the assistance of another meteorological office in supplying it;
- d) information received on volcanic ash cloud, for which a SIGMET has not already been issued, as agreed between the meteorological and ATS authorities concerned;
- e) information received concerning the release of radioactive material into the atmosphere, as agreed between the meteorological and ATS authorities concerned;
- f) tropical cyclone advisory information issued by a tropical cyclone advisory centre in its area of responsibility;
- g) volcanic ash advisory information issued by a volcanic ash advisory centre in its area of responsibility; and
- h) information received on pre-eruption volcanic activity and/or a volcanic eruption as agreed between the meteorological and ATS authorities concerned.

### 1.4 Supply of information to aeronautical telecommunications stations

Where necessary for flight information purposes, current meteorological reports and forecasts shall be supplied to designated aeronautical telecommunication stations. A copy of such information shall be forwarded, if required, to the FIC or ACC.

### 1.5 Format of information

1.5.1 Local routine and special reports, METAR and SPECI, TAF and trend forecasts, SIGMET and AIRMET information, upper wind and upper-air temperature forecasts and amendments thereto should be supplied to air traffic services units in the form in which they are prepared, disseminated to other aerodrome meteorological offices or received from other aerodrome meteorological offices or MWOs, unless otherwise agreed locally.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Information for ATS, SAR and AIS	APP 9	Page: APP 9-3

1.5.2 When computer-processed upper-air data for grid points are made available to air traffic services units in digital form for use by air traffic services computers, the contents, format and transmission arrangements should be as agreed between the designated MET service provider and the appropriate ATS authority. The data should normally be supplied as soon as is practicable after the processing of the forecasts has been completed.

## **2. INFORMATION TO BE PROVIDED FOR SEARCH AND RESCUE SERVICES UNITS**

### **2.1 List of information**

Information to be supplied to rescue coordination centres shall include the meteorological conditions that existed in the last known position of a missing aircraft and along the intended route of that aircraft with particular reference to:

- a) significant en-route weather phenomena;
- b) cloud amount and type, particularly cumulonimbus; height indications of bases and tops;
- c) visibility and phenomena reducing visibility;
- d) surface wind and upper wind;
- e) state of ground, in particular, any snow cover or flooding;
- f) sea-surface temperature, state of the sea, ice cover if any and ocean currents, if relevant to the search area; and
- g) sea-level pressure data.

### **2.2 Information to be provided on request**

2.2.1 On request from the rescue coordination centre, the designated aerodrome meteorological office or MWO should arrange to obtain details of the flight documentation which was supplied to the missing aircraft, together with any amendments to the forecast which were transmitted to the aircraft in flight.

2.2.2 To facilitate search and rescue operations the designated aerodrome meteorological office or MWO should, on request, supply:

- a) complete and detailed information on the current and forecast meteorological conditions in the search area; and
- b) current and forecast conditions en route, covering flights by search aircraft from and returning to the aerodrome from which the search is being conducted.

2.2.3 On request from the rescue coordination centre, the designated aerodrome meteorological office or WMO should supply or arrange for the supply of meteorological information required by ships undertaking search and rescue operations.

## **3. INFORMATION TO BE PROVIDED FOR AERONAUTICAL INFORMATION SERVICES UNITS**

### **3.1 List of information**

The following information shall be supplied, as necessary, to an aeronautical information services unit:

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Information for ATS, SAR and AIS	APP 9	Page: APP 9-4

- a) information on meteorological service for international air navigation, intended for inclusion in the aeronautical information publication(s) concerned;

*Note.— Details of this information are given in PANS-AIM Appendix 3, Part 1, GEN 3.5 and Part 3, AD 2.2, 2.11, 3.2 and 3.11*

- b) Information necessary for the preparation of NOTAM including, in particular, information on:

- 1) the establishment, withdrawal and significant changes in operation of aeronautical meteorological services. This information is required to be provided to the aeronautical information services unit sufficiently in advance of the effective date to permit issuance of NOTAM in compliance with BCAR-15, 6.3.2.2 and 6.3.2.3;

- 2) the occurrence of volcanic activity; and

*Note.— The specific information required is given in Chapter 3, 3.3.2 and Chapter 4, 4.8.*

- 3) release of radioactive materials into the atmosphere, as agreed between the meteorological and appropriate civil aviation authorities concerned; and

*Note.— The specific information required is given in Chapter 3, 3.4.2 g).*

- c) information necessary for the preparation of aeronautical information circulars including, in particular, information on:

- 1) expected important changes in aeronautical meteorological procedures, services and facilities provided; and

- 2) effect of certain weather phenomena on aircraft operations.

---

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Technical Specifications related to Requirements for and Use of Communications	APP 10	Page: 1

## **APPENDIX 10. TECHNICAL SPECIFICATIONS RELATED TO REQUIREMENTS FOR AND USE OF COMMUNICATIONS**

*(See Chapter 11 of this document)*

### **1. SPECIFIC REQUIREMENTS FOR COMMUNICATIONS**

#### **1.1 Required transit times of operational meteorological information**

Messages and bulletins containing operational meteorological information shall achieve transit times of less than 5 minutes, unless otherwise determined to be lower by regional air navigation agreement.

#### **1.2 Grid point data for ATS and operators**

1.2.1 When upper-air data for grid points in digital form are made available for use by air traffic services computers, the transmission arrangements should be as agreed between the designated MET service provider and the appropriate ATS authority.

1.2.2 When upper-air data for grid points in digital form are made available to operators for flight planning by computer, the transmission arrangements should be as agreed between the world area forecast centre concerned, the designated MET service provider and the operators concerned.

### **2. USE OF AERONAUTICAL FIXED SERVICE COMMUNICATIONS AND THE PUBLIC INTERNET**

#### **2.1 Meteorological bulletins in alphanumeric format**

##### **2.1.1 Composition of bulletins**

Whenever possible, exchanges of operational meteorological information should be made in consolidated bulletins of the same types of meteorological information.

##### **2.1.2 Filing times of bulletins**

Meteorological bulletins required for scheduled transmissions should be filed regularly and at the prescribed scheduled times. METAR should be filed for transmission not later than 5 minutes after the actual time of observation. TAF should be filed for transmission not earlier than one hour prior to the beginning of their validity period.

##### **2.1.3 Heading of bulletins**

Meteorological bulletins containing operational meteorological information to be transmitted via the aeronautical fixed service or the public Internet shall contain a heading consisting of:

- a) an identifier of four letters and two figures;
- b) the ICAO four-letter location indicator corresponding to the geographical location of the meteorological office originating or compiling the meteorological bulletin;
- c) a day-time group; and

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Requirements for and Use of Communications	APP 10	Page: 2

d) if required, a three-letter indicator.

*Note 1.— Detailed specifications on format and contents of the heading are given in the Manual on the Global Telecommunication System (WMO-No. 386) and are reproduced in the Manual of Aeronautical Meteorological Practice (ICAO Doc 8896).*

*Note 2.— ICAO location indicators are listed in Location Indicators (ICAO Doc 7910).*

#### 2.1.4 Transmission containing operational meteorological information

Meteorological bulletins containing operational meteorological information shall be transmitted via the aeronautical fixed service (AFS).

### 2.2 World area forecast system products

#### 2.2.1 Telecommunications for the supply of WAFS products

The telecommunications facilities used for the supply of WAFS products should be the aeronautical fixed service or the public Internet.

#### 2.2.2 Quality requirements for charts

Where WAFS products are disseminated in chart form, the quality of the charts received should be such as to permit reproduction in a sufficiently legible form for flight planning and documentation. Charts received should be legible over 95 percent of their area.

#### 2.2.3 Quality requirements for transmissions

Transmissions should be such as to ensure that their interruption should not exceed 10 minutes during any period of 6 hours.

#### 2.2.4 Heading of bulletins containing WAFS products

Meteorological bulletins containing WAFS products in digital form to be transmitted via aeronautical fixed service or the public Internet shall contain a heading as given in 2.1.3.

## 3. USE OF AERONAUTICAL MOBILE SERVICE COMMUNICATIONS

### 3.1 Content and format of meteorological messages

3.1.1 The contents and format of reports, forecasts and SIGMET information transmitted to aircraft shall be consistent with the provisions of Chapters 4, 6 and 7 of this document.

3.1.2 The contents and format of air-reports transmitted by aircraft shall be consistent with the provisions of Chapter 5 of this document and the Procedures for Air Navigation Services — Air Traffic Management (PANS-ATM, ICAO Doc 4444), Appendix 1.

### 3.2 Content and format of meteorological bulletins

The substance of a meteorological bulletin transmitted via the aeronautical mobile service shall remain unchanged from that contained in the bulletin as originated.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	<b>BCAR - 3</b>	
	Technical Specifications related to Requirements for and Use of Communications	APP 10	Page: 3

#### **4. USE OF AERONAUTICAL DATA LINK SERVICE — D-VOLMET**

##### **4.1 Detailed content of meteorological information available for D-VOLMET**

4.1.1 The aerodromes for which METAR, SPECI and TAF are to be available for uplink to aircraft in flight shall be determined by regional air navigation agreement.

4.1.2 The flight information regions (FIRs) for which SIGMET and AIRMET messages are to be available for uplink to aircraft in flight shall be determined by regional air navigation agreement.

##### **4.2 Criteria related to information to be available for D-VOLMET**

4.2.1 The latest available METAR, SPECI and TAF, and valid SIGMET and AIRMET should be used for uplink to aircraft in flight.

4.2.2 TAF included in the D-VOLMET should be amended as necessary to ensure that a forecast, when made available for uplink to aircraft in flight, reflects the latest opinion of the aerodrome meteorological office concerned.

4.2.3 If no SIGMET message is valid for an FIR, an indication of “NIL SIGMET” should be included in the D-VOLMET.

##### **4.3 Format of information to be available for D-VOLMET**

The content and format of reports, forecasts and SIGMET and AIRMET information included in D-VOLMET shall be consistent with the provisions of Chapters 4, 6 and 7 of this document.

#### **5. USE OF AERONAUTICAL BROADCASTING SERVICE — VOLMET BROADCASTS**

##### **5.1 Detailed content of meteorological information to be included in VOLMET broadcasts**

5.1.1 The aerodromes for which METAR, SPECI and TAF are to be included in VOLMET broadcasts, the sequence in which they are to be transmitted and the broadcast time shall be determined by regional air navigation agreement.

5.1.2 The flight information regions for which SIGMET messages are to be included in scheduled VOLMET broadcasts shall be determined by regional air navigation agreement. Where this is done, the SIGMET message shall be transmitted at the beginning of the broadcast or of a five -minute time block.

##### **5.2 Criteria related to information to be included in VOLMET broadcasts**

5.2.1 When a report has not arrived from an aerodrome in time for a broadcast, the latest available report should be included in the broadcast, together with the time of observation.

5.2.2 TAF included in scheduled VOLMET broadcasts should be amended as necessary to ensure that a forecast, when transmitted, reflects the latest opinion of the meteorological office concerned.

5.2.3 Where SIGMET messages are included in scheduled VOLMET broadcasts, an indication of “NIL SIGMET” should be transmitted if no SIGMET message is valid for the flight information regions concerned.

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

	<b>Meteorological Service</b>	BCAR - 3	
	Technical Specifications related to Requirements for and Use of Communications	APP 10	Page: 4

### 5.3 Format of information to be included in VOLMET broadcasts

5.3.1 The content and format of reports, forecasts and SIGMET information included in VOLMET broadcasts shall be consistent with the provisions of Chapters 4, 6 and 7 of this document.

5.3.2 VOLMET broadcasts should use standard radiotelephony phraseologies.

*Note.— Guidance on the standard radiotelephony phraseologies to be used in VOLMET broadcasts is given in the Manual on Coordination between Air Traffic Services, Aeronautical Information Services and Aeronautical Meteorological Services (ICAO Doc 9377), Appendix 1.*

---

	<b>Meteorological Service</b>	BCAR - 3	
	Operationally Desirable Accuracy Measurement or Observations	ATT A	Page: ATT A-1

## ATTACHMENT A. OPERATIONALLY DESIRABLE ACCURACY MEASUREMENT OR OBSERVATION

*Note.— The guidance contained in this table relates to Chapter 2, 2.2 in particular to 2.2.7, and Chapter 4.*

<i>Element to be observed</i>	<i>Operationally desirable accuracy of measurement or observation*</i>
Mean surface wind	Direction: $\pm 10^\circ$ Speed: $\pm 0.5$ m/s (1 kt) up to 5 m/s (10 kt) $\pm 10\%$ above 5 m/s (10 kt)
Variations from the mean surface wind	$\pm 1$ m/s (2 kt), in terms of longitudinal and lateral components
Visibility	$\pm 50$ m up to 600 m $\pm 10\%$ between 600 m and 1 500 m $\pm 20\%$ above 1 500 m
Runway visual range	$\pm 10$ m up to 400 m $\pm 25$ m between 400 m and 800 m $\pm 10\%$ above 800 m
Cloud amount	$\pm 1$ okta
Cloud height	$\pm 10$ m (33 ft) up to 100 m (330 ft) $\pm 10\%$ above 100 m (330 ft)
Air temperature and dew-point Temperature	$\pm 1^\circ\text{C}$
Pressure value (QNH, QFE)	$\pm 0.5$ hPa

\*The operationally desirable accuracy is not intended as an operational requirement; it is to be understood as a goal that has been expressed by the operators.

*Note.— Guidance on the uncertainties of measurement or observation can be found in the Guide to Meteorological Instruments and Methods of Observation (WMO-No. 8).*

Third Edition	Amendment 5	Bhutan Civil Aviation Authority	31/10/2024
---------------	-------------	---------------------------------	------------

## ATTACHMENT B. OPERATIONALLY DESIRABLE ACCURACY OF FORECASTS

*Note 1.— The guidance contained in this table relates to Chapter 2, 2.2 in particular to 2.2.8, and Chapter 6.*

*Note 2.— If the accuracy of the forecasts remains within the operationally desirable range shown in the second column, for the percentage of cases indicated in the third column, the effect of forecast errors is not considered serious in comparison with the effects of navigational errors and of other operational uncertainties.*

<i>Element to be forecast</i>	<i>Operationally desirable accuracy of forecasts</i>	<i>Minimum percentage of cases within range</i>
<b>TAF</b>		
Wind direction	± 20°	80% of cases
Wind speed	± 2.5 m/s (5 kt)	80% of cases
Visibility	± 200 m up to 800 m ± 30% between 800 m and 10 km	80% of cases
Precipitation	Occurrence or non-occurrence	80% of cases
Cloud amount	One category below 450 m (1 500 ft) Occurrence or non-occurrence of BKN or OVC between 450 m (1 500 ft) and 3 000 m (10 000 ft)	70% of cases
Cloud height	± 30 m (100 ft) up to 300 m (1 000 ft) ± 30% between 300 m (1 000 ft) and 3 000 m (10 000 ft)	70% of cases
Air temperature	± 1°C	70% of cases
<b>TREND FORECAST</b>		
Wind direction	± 20°	90% of cases
Wind speed	± 2.5 m/s (5 kt)	90% of cases
Visibility	± 200 m up to 800 m ± 30% between 800 m and 10 km	90% of cases
Precipitation	Occurrence or non-occurrence	90% of cases

	<b>Meteorological Service</b>		BCAR - 3	
	Operationally Desirable Accuracy of Forecasts		ATT B	Page: 2

<i>Element to be forecast</i>	<i>Operationally desirable accuracy of forecasts</i>	<i>Minimum percentage of cases within range</i>
Cloud amount	One category below 450 m (1 500 ft) Occurrence or non-occurrence of BKN or OVC between 450 m (1 500 ft) and 3 000 m (10 000 ft)	90% of cases
Cloud height	± 30 m (100 ft) up to 300 m (1 000 ft) ± 30% between 300 m (1 000 ft) and 3 000 m (10 000 ft)	90% of cases
<b>FORECAST FOR TAKE-OFF</b>		
Wind direction	± 20°	90% of cases
Wind speed	± 2.5 m/s (5 kt) up to 12.5 m/s (25 kt)	90% of cases
Air temperature	± 1°C	90% of cases
Pressure value (QNH)	± 1 hPa	90% of cases
<b>AREA, FLIGHT AND ROUTE FORECASTS</b>		
Upper-air temperature	± 2°C (Mean for 900 km (500 NM))	90% of cases
Relative humidity	± 20%	90% of cases
Upper wind	± 5 m/s (10 kt) (Modulus of vector difference for 900 km (500 NM))	90% of cases
Significant en-route weather phenomena and cloud	Occurrence or non-occurrence Location: ± 100 km (60 NM) Vertical extent: ± 300 m (1 000 ft) Flight level of tropopause: ± 300 m (1 000 ft) Max wind level: ± 300 m (1 000 ft)	80% of cases 70% of cases 70% of cases 80% of cases 80% of cases



## ATTACHMENT C. SELECTED CRITERIA APPLICABLE TO AERODROME REPORTS

*(The guidance in this table relates to Chapter 4 and Appendix 3.)*

	Surface wind		Visibility (VIS)		RVR <sup>1</sup>		C (OBS TIME)	Present weather	Cloud					Temperature	Pressure (QNH, QFE)		Supplementary information	
	A	B	(Time, MIN)		Past tendency <sup>5</sup>				Variations <sup>5</sup>		Amount				Type <sup>2</sup>	Parameters reported		Updated if changes > agreed magnitude
Specifications	Directional variations <sup>3</sup> ≥ 60° and < 180° Mean speed < 1.5 m/s (3 kt)    ≥ 1.5 m/s (3 kt)		Speed variations <sup>3</sup> ≥ 180° Exceeding the mean speed by ≥ 5 m/s (10 kt)	Directional variations <sup>4</sup> Special cases Minimum VIS ≠ prevailing VIS Minimum VIS < 1 500 m or < 0.5 × prevailing VIS VIS fluctuating and prevailing VIS cannot be determined		$\bar{R}_{S(AB)} - \bar{R}_{S(BC)}$   < 100 m    ≥ 100 m		$\bar{R}_1 - \bar{R}_{10}$   > MAX [50 m or 20% × $\bar{R}_{10}$ ]		Layers reported if coverage Lowest layer    Next layer >    Next higher layer >    CB <sup>6</sup> or TCU    Identification					No criteria	QNH QFE <sup>10</sup>	Yes	All <sup>11</sup>
Local routine and special report	2 min <sup>7</sup> VRB + 2 extreme directions <sup>8</sup>	2 min mean + 2 extreme directions <sup>8</sup>	2 min VRB (no extremes) <sup>8</sup>	2 min Minimum and maximum speed	1 min VIS along the runway(s)	N/A	N/A	N/A <sup>9</sup>					No criteria	QNH QFE <sup>10</sup>	Yes	All <sup>11</sup>		
METAR/SPECI	10 min VRB (no extremes)	10 min mean + 2 extreme directions	10 min VRB (no extremes)	10 min Maximum speed <sup>8</sup>	10 min Prevailing VIS	Prevailing VIS and minimum VIS + direction	Minimum VIS	10 min No tendency observed ("N") Upward ("U") or downward ("D") No tendency available, the tendency is to be omitted	1 min Minimum and maximum (instead of 10-minute mean)	Always    2/8    4/8    Always    CB TCU					No criteria	QNH	No	Recent WX of operational significance and wind shear <sup>12</sup>
Relevant reporting scales for all messages	Direction in three figures rounded off to the nearest 10 degrees (degrees 1 – 4 down, degrees 5 – 9 up)		Speed in 1 m/s or 1 kt Speed < 0.5 m/s (1 kt) indicated as CALM	<i>If</i> VIS < 800 m : 50 m 800 m ≤ VIS < 5 000 m : 100 m 5 000 m ≤ VIS < 10 km : 1 km VIS ≥ 10 km : None, given as 10 km or covered under CAVOK	<i>Step applicable</i> RVR < 400 m : 25 m 400 m ≤ RVR ≤ 800 m : 50 m 800 m < RVR < 2 000 m : 100 m <sup>13</sup>	<i>If</i> RVR < 400 m : 25 m 400 m ≤ RVR ≤ 800 m : 50 m 800 m < RVR < 2 000 m : 100 m <sup>13</sup>	<i>Step applicable</i> Base ≤ 3 000 m (10 000 ft) : 30 m (100 ft) (Reference level: Aerodrome elevation <sup>14</sup> or mean sea level for offshore structures)	N/A	<i>If</i> Base ≤ 3 000 m (10 000 ft) : 30 m (100 ft) (Reference level: Aerodrome elevation <sup>14</sup> or mean sea level for offshore structures)	<i>Step applicable</i> Base ≤ 3 000 m (10 000 ft) : 30 m (100 ft) (Reference level: Aerodrome elevation <sup>14</sup> or mean sea level for offshore structures)					Rounded off to whole degrees: up for decimal 5	In whole hPa <sup>15</sup> rounding down for decimals 1 – 9	N/A	

Notes.—

1. Considered for the past 10 minutes (exception: if the 10-minute period includes a *marked discontinuity* (i.e. RVR changes or passes 150, 350, 600 or 800 m, lasting ≥ 2 minutes), only data after the discontinuity to be used). A simple diagrammatic convention is used to illustrate those parts of the 10-minute period prior to the observation relevant to RVR criteria, i.e. AB, BC and AC.
2. Layer composed of CB and TCU with a common base should be reported as "CB".
3. Considered for the past 10 minutes (exception: if the 10-minute period includes a *marked discontinuity* (i.e. the direction changes ≥ 30° with a speed ≥ 5 m/s or the speed changes ≥ 5 m/s lasting ≥ 2 minutes), only data after the discontinuity to be used).
4. If several directions, the most operationally significant direction used.
5. Let  $\bar{R}_1$  = any 1-minute mean RVR value during period AC,  $\bar{R}_{10}$  = 10-minute mean RVR value during period AC,  $\bar{R}_{S(AB)}$  = 5-minute mean RVR value during period AB and  $\bar{R}_{S(BC)}$  = 5-minute mean RVR value during period BC.
6. CB (cumulonimbus) and TCU (towering cumulus = cumulus congestus of great vertical extent) if not already indicated as one of the other layers.
7. Time averaging, if applicable, indicated in the upper left-hand corner.
8. According to the WMO *Manual on Codes* (WMO-No. 306), Volume I.1, Part A — Alphanumeric Codes, paragraph 15.5.5, "it is recommended that the wind measuring systems should be such that peak gusts should represent a three-second average".
9. N/A = not applicable.
10. QFE is to be included if required. Reference elevation for QFE should be aerodrome elevation except for precision approach runways, and non-precision approach runways with threshold ≥ 2 m (7 ft) below or above aerodrome elevation, where the reference level should be the relevant threshold elevation.
11. As listed in Appendix 3, 4.8.
12. Also sea-surface temperature and state of the sea from offshore structures in accordance with regional air navigation agreement.
13. Report if RVR and/or VIS < 1 500 m, limits for assessments 50 and 2 000 m.
14. For landing at aerodromes with precision approach runways and with the threshold elevation ≥ 15 m below the aerodrome elevation, the *threshold elevation* to be used as a reference.
15. Measured in 0.1 hPa.

## ATTACHMENT D. CONVERSION OF INSTRUMENTED READINGS INTO RUNWAY VISUAL RANGE AND VISIBILITY

*(See Appendix 3, 4.3.5 of this document.)*

1. The conversion of instrumented readings into runway visual range and visibility is based on Koschmieder’s Law or Allard’s Law, depending on whether the pilot can be expected to obtain main visual guidance from the runway and its markings or from the runway lights. In the interest of standardization in runway visual range assessments, this Attachment provides guidance on the use and application of the main conversion factors to be used in these computations.
2. In Koschmieder’s Law one of the factors to be taken into account is the pilot contrast threshold. The agreed constant to be used for this is 0.05 (dimensionless).
3. In Allard’s Law the corresponding factor is the illumination threshold. This is not a constant, but a continuous function dependent on the background luminance. The agreed relationship to be used in instrumented systems with continuous adjustment of the illumination threshold by a background luminance sensor is shown by the curve in Figure D-1. The use of a continuous function which approximates the step function such as displayed in Figure D-1 is preferred, due to its higher accuracy, to the stepped relationship described in paragraph 4.
4. In instrumented systems without continuous adjustment of the illumination threshold, the use of four equally spaced illumination threshold values with agreed corresponding background luminance ranges is convenient but will reduce accuracy. The four values are shown in Figure D-1 in the form of a step function; they are tabulated in Table D-1 for greater clarity.


*Note 1.— Information and guidance material on the runway lights to be used for assessment of runway visual range are contained in the Manual of Runway Visual Range Observing and Reporting Practices (ICAO Doc 9328).*

*Note 2.— In accordance with the definition of visibility for aeronautical purposes, the intensity of lights to be used for the assessment of visibility is in the vicinity of 1 000 cd.*

**Table D-1. Illumination threshold steps**

<i>Condition</i>	<i>Illumination threshold (lx)</i>	<i>Background luminance (cd/m<sup>2</sup>)</i>
Night	$8 \times 10^{-7}$	$\leq 50$
Intermediate	$10^{-5}$	51 – 999
Normal day	$10^{-4}$	1 000 – 12 000
Bright day (sunlit fog)	$10^{-3}$	> 12 000

**Figure D-1. Relationship between the illumination threshold ET (lx) and background luminance B (cd/m<sup>2</sup>)**

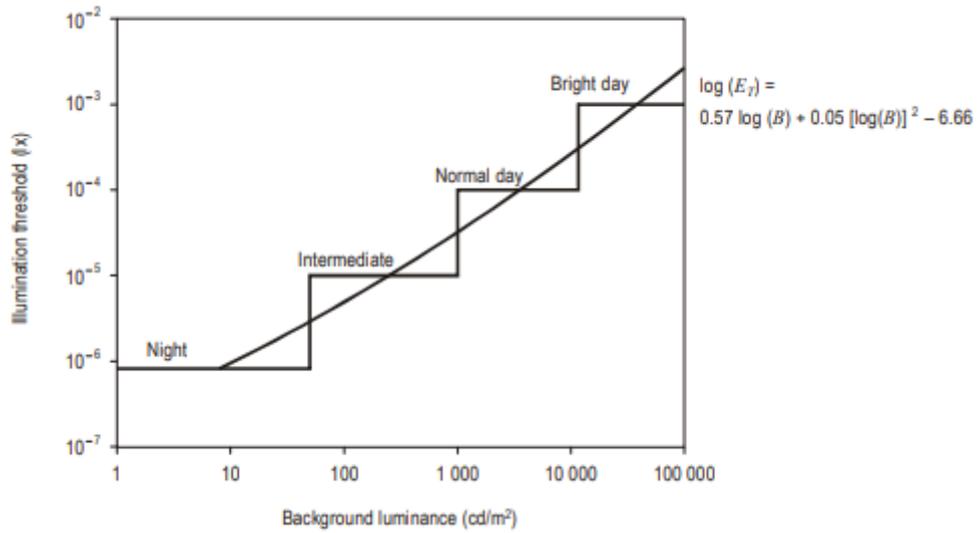

**ATTACHMENT E. SPATIAL RANGES AND RESOLUTIONS FOR SPACE WEATHER ADVISORY INFORMATION**

Element to be forecast		Range	Resolution
Flight Level affected by radiation:		250-600	30
Longitudes for advisories(degrees):		000 – 180	15
Latitudes for advisories(degrees):		00-90	10
Latitude bands for advisories:	High latitudes northern hemisphere (HNN)	N9000 - N6000	30
	Middle latitudes northern hemisphere (MNN)	N6000 - N3000	
	Equatorial latitudes northern hemisphere (EQN)	N3000 - N0000	
	Equatorial latitudes southern hemisphere (EQS)	S0000 - S3000	
	Middle latitudes southern hemisphere (MSH)	S3000 - S6000	
	High latitudes southern hemisphere (HSH)	S6000 - S9000	

- END -